

GIS REGISTRY INFORMATION

SITE NAME: Lulich Implement Inc
 BRRTS #: 03-04-000794 FID #: (if appropriate):
 COMMERCE # (if appropriate): 54856-9499-71
 CLOSURE DATE: 3/11/05
 STREET ADDRESS: 64850 USH 63
 CITY: Mason

SOURCE PROPERTY GPS COORDINATES (meters in WTM91 projection): X= 439315 Y= 671792

CONTAMINATED MEDIA: Groundwater Soil Both

OFF-SOURCE GW CONTAMINATION >ES: Yes No

IF YES, STREET ADDRESS 1: _____

GPS COORDINATES (meters in WTM91 projection): X= _____ Y= _____

OFF-SOURCE SOIL CONTAMINATION >Generic or Site-Specific RCL (SSRCL): Yes No

IF YES, STREET ADDRESS 1: _____

GPS COORDINATES (meters in WTM91 projection): X= _____ Y= _____

CONTAMINATION IN RIGHT OF WAY: Yes No

DOCUMENTS NEEDED:

- Closure Letter, and any conditional closure letter issued
- Copy of most recent deed, including legal description, for all affected properties
- Certified survey map or relevant portion of the recorded plat map (if referenced in the legal description) for all affected properties *N/A*
- County Parcel ID number, if used for county, for all affected properties 02-010651-0000
- Location Map which outlines all properties within contaminated site boundaries on USGS topographic map or plat map in sufficient detail to permit the parcels to be located easily (8.5x14" if paper copy). If groundwater standards are exceeded, the map must also include the location of all municipal and potable wells within 1200' of the site.
- Detailed Site Map(s) for all affected properties, showing buildings, roads, property boundaries, contaminant sources, utility lines, monitoring wells and potable wells. (8.5x14", if paper copy) This map shall also show the location of all contaminated public streets, highway and railroad rights-of-way in relation to the source property and in relation to the boundaries of groundwater contamination exceeding ch. NR 140 ESS and soil contamination exceeding ch. NR 720 generic or SSRCLs.
- Tables of Latest Groundwater Analytical Results (no shading or cross-hatching)
- Tables of Latest Soil Analytical Results (no shading or cross-hatching)
- Isoconcentration map(s), if required for site investigation (SI) (8.5x14" if paper copy). The isoconcentration map should have flow direction and extent of groundwater contamination defined. If not available, include the latest extent of contaminant plume map.
- GW: Table of water level elevations, with sampling dates, and free product noted if present
- GW: Latest groundwater flow direction/monitoring well location map (should be 2 maps if maximum variation in flow direction is greater than 20 degrees)
- SOIL: Latest horizontal extent of contamination exceeding generic or SSRCLs, with one contour
- Geologic cross-sections, if required for SI. (8.5x14" if paper copy)
- RP certified statement that legal descriptions are complete and accurate
- Copies of off-source notification letters (if applicable)
- Letter informing ROW owner of residual contamination (if applicable)(public, highway or railroad ROW)
- Copy of (soil or land use) deed restriction(s) or deed notice if any required as a condition of closure



N/A
N/A
N/A



State of Wisconsin \ DEPARTMENT OF NATURAL RESOURCES

Jim Doyle, Governor
Scott Hassett, Secretary
John Gozdziński, Regional Director

Northern Region Headquarters
107 Sutliff Ave.
Rhinelander, Wisconsin 54501-3349
Telephone 715-365-8900
FAX 715-365-8932
TTY Access via relay - 711

March 15, 2005

Mr. Peter Lulich
Lulich Implement Inc
Rt 2, Box 35
Mason, WI 54856

SUBJECT: Final Case Closure By Closure Committee
Lulich Implement, Inc., 64850 USH 63, Mason, WI
WDNR BRRTS #:03-04-000794
PECFA #: 54856-9499-71

Dear Mr. Lulich:

On January 7, 2005, your site as described above was reviewed for closure by the Northern Closure Committee. This committee reviews environmental remediation cases for compliance with state laws and standards to maintain consistency in the closure of these cases. On January 10, 2005, you were notified that the Closure Committee had granted conditional closure to this case.

On March 11, 2005, the Department received correspondence indicating that you have complied with the conditions of closure, specifically, documentation of the abandonment of the monitoring wells. Based on the correspondence and data provided, it appears that your case has been remediated to Department standards in accordance with s. NR 726.05, Wis. Adm. Code. The Department considers this case closed and no further investigation, remediation or other action is required at this time.

Your site will be listed on the DNR Remediation and Redevelopment GIS Registry of Closed Remediation Sites. Information that was submitted with your closure request application will be included on the registry. To review the sites on the GIS Registry web page, visit <http://gomapout.dnr.state.wi.us/org/at/et/geo/gwur/index.htm>

If your property is listed on the GIS Registry due to groundwater contamination exceeding ch. NR 140 standards at the time of closure, and you intend to construct or reconstruct a well, you will need Department approval. Department approval is required before construction or reconstruction of a well on a property listed on the GIS Registry, in accordance with s. NR 812.09(4)(w). To obtain approval, Form 3300-254 needs to be completed and submitted to the DNR Drinking and Groundwater program's regional water supply specialist. This form can be obtained on-line at the web address listed above.

If there is equipment purchased with PECFA funds remaining at the site, contact the Commerce PECFA Program to determine the method for salvaging the equipment.

Please be aware that this case may be reopened pursuant to s. NR 726.09, Wis. Adm. Code, if additional information regarding site conditions indicates that contamination on or from the site poses a threat to public health, safety or welfare, or the environment.

The Department appreciates your efforts to restore the environment at this site. If you have any questions regarding this letter, please contact me at 715-365-8990.

Sincerely,
NORTHERN REGION



Janet Kazda
Remediation & Redevelopment Program

cc: File
Chris Saari, Ashland

Ayad Taofik
Coleman Engineering Co
635 Circle Dr
Iron Mountain, MI 49801



State of Wisconsin \ DEPARTMENT OF NATURAL RESOURCES

Jim Doyle, Governor
Scott Hassett, Secretary
John Gozdzialski, Regional Director

Northern Region Headquarters
107 Sutliff Ave.
Rhineland, Wisconsin 54501-3349
Telephone 715-365-8900
FAX 715-365-8932
TTY Access via relay - 711

January 10, 2005

Mr. Peter Lulich
Lulich Implement Inc
Rt 2, Box 35
Mason, WI 54856

Subject: Conditional Closure
Lulich Implement Inc, 64850 USH 63, Mason, Wisconsin
BRRTS # 03-04-000794
PECFA # 54856-9499-71

Dear Mr. Lulich:

On January 7, 2005, your request for closure of the case described above was reviewed by the Northern Region Closure Committee. The Closure Committee reviews environmental remediation cases for compliance with state rules and statutes to maintain consistency in the closure of these cases. After careful review of the closure request, the Closure Committee has determined that the gasoline and diesel fuel contamination on the site appears to have been investigated and remediated to the extent practicable under site conditions. Your case has been remediated to Department standards in accordance with s. NR 726.05, Wis. Adm. Code and will be closed if the following conditions are satisfied:

The monitoring wells at the site must be properly abandoned in compliance with ch. NR 141, Wis. Adm. Code. Documentation of well abandonment must be submitted to me on Form 3300-5B found at www.dnr.state.wi.us/org/water/dgw/gw/ or provided by the Department of Natural Resources.

When the above conditions have been satisfied, please submit a letter to let me know that applicable conditions have been met, and your case will be closed. Your site will be listed on the DNR Remediation and Redevelopment GIS Registry of Closed Remediation Sites. Information that was submitted with your closure request application will be included on the registry. To review the sites on the GIS Registry web page, visit <http://gomapout.dnr.state.wi.us/org/at/et/geo/gwur/index.htm>.

If this is a PECFA site, section 101.143, Wis. Stats., requires that PECFA claimants seeking reimbursement of interest costs, for sites with petroleum contamination, submit a final reimbursement claim within 120 days after they receive a closure letter on their site. For claims not received by the PECFA Program within 120 days of the date of this letter, interest costs after 60 days of the date of this letter will not be eligible for PECFA reimbursement.

Please be aware that the case may be reopened pursuant to s. NR 726.09, Wis. Adm. Code, if additional information regarding site conditions indicates that contamination on or from the site poses a threat to public health, safety, or welfare or to the environment.

We appreciate your efforts to restore the environment at this site. If you have any questions regarding this letter, please contact me at 715-365-8990.

Sincerely,
NORTHERN REGION

A handwritten signature in cursive script that reads "Janet Kazda".

Janet Kazda
Remediation and Redevelopment Program

c: File
Chris Saari, Ashland

Ayad Taofik
Coleman Engineering Co
635 Circle Dr
Iron Mountain, MI 49801

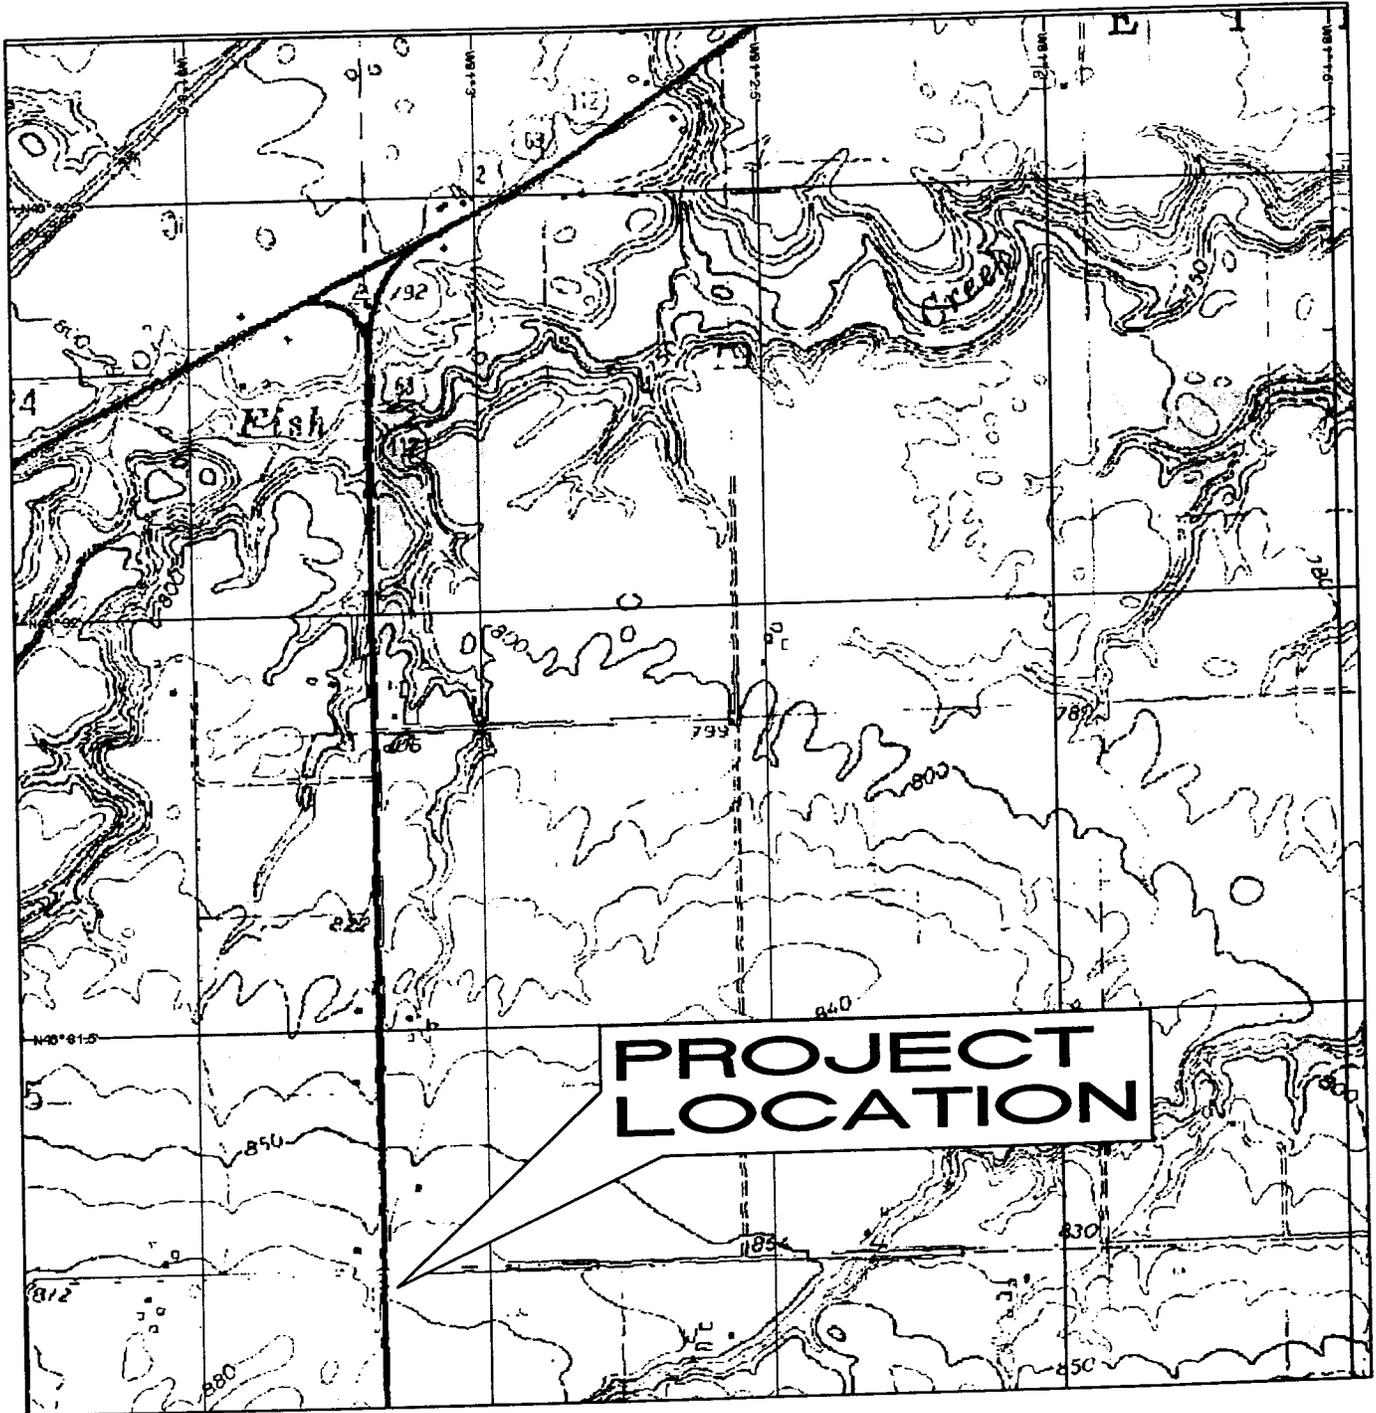


FIGURE 2
SITE LOCATION MAP
LULICH IMPLEMENT, INC.
MASON, WISCONSIN



COLEMAN ENGINEERING COMPANY
635 CIRCLE DRIVE
IRON MOUNTAIN, MICHIGAN 49801

DATE 8/12/04
JOB NO 94630
CADD FILE 94630FIG2

Summary of Groundwater Analytical Results
Lulich Implement, Incorporated
Mason, Wisconsin


Concentration, micrograms per Liter (ug/L)																
Sample Location	Sample Date	Benzene	1,2-DCA	Ethylbenzene	Isopropylbenzene	Methylene chloride	MTBE	Naphthalene	Tetrachloroethene	Toluene	1,3,5-TMB	1,2,4-TMB	Xylenes	Lead	DRO	GRO
MW-1	11/14/1995	12,000	<200	3,200	<200	<200	<200	670	<200	44,000	1,500	5,300	24,500	99	49,000	140,000
MW-2	7/30/1996	<0.26	<0.86	<0.32	<0.36	<4	<0.22	<0.41	<0.56	<0.69	<0.57	<0.57	<1.23	<3	<100	<100
	1/29/2003	<0.45	NA	<0.82	NA	NA	<0.43	<0.89	NA	<0.68	<0.94	<0.92	<2.47		NA	NA
	4/15/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	7/30/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
MW-3	7/30/1996	<0.26	<0.86	<0.32	<0.36	<4	<0.22	<0.41	<0.56	<0.69	<0.57	<0.57	<1.23	<3	<100	<100
	8/9/1996	<0.26	<0.86	4.5	<0.36	<4	<0.22	<0.41	<0.56	<0.69	4.6	3.6	20.9			
	1/29/2003	11	NA	56	NA	NA	<0.43	13	NA	<0.68	17	7.1	9.3 (Q)		NA	NA
	4/15/2003	<0.3	NA	1.2 (Q)	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	7/30/2003	0.4 (Q)	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	11/6/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
MW-4	7/30/1996	<0.26	<0.86	<0.32	<0.36	<4	<0.22	<0.41	<0.56	<0.69	<0.57	<0.57	<1.23	<3	<100	<100
	1/29/2003	<0.45	NA	<0.82	NA	NA	<0.43	<0.89	NA	<0.68	<0.94	<0.92	<2.47		NA	NA
	4/15/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	7/30/2003	<0.3	NA	<0.6	NA	NA	<0.58	NA	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
MW-5	1/29/2003	240 (E)	<0.55	31	1.6 (Q)	<0.47	<0.87	5.6	<0.63	23	35	22	132		1000	1100
	7/30/2003	230	NA	11	NA	NA	2.1	NA	NA	9.8	9.8	14	28		NA	NA
	11/6/2003	90	NA	1.4 (Q)	NA	NA	1.7 (Q)	2.8	NA	0.76 (Q)	1.7 (Q)	<0.66	<1.84		NA	NA
P-2	4/15/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
DW	1/29/2003	<0.25	<0.55	<0.53	<0.66	0.85 (Q)	<0.87	0.78 (Q)	3.0	<0.84	<0.64	<0.69	<1.83		NA	NA
Sampling Blanks																
Duplicate	1/29/2003	240	17	29	1.5 (Q)	<0.94	<1.7	6.7	<1.3	23	32	22	126		NA	NA
	4/15/2003	0.52 (Q)	NA	2.6	NA	NA	<0.58	<0.58	NA	<0.58	0.56 (Q)	<0.66	<1.84		NA	NA
	7/30/2003	220	NA	10	NA	NA	1.8 (Q)	NA	NA	9.6	9.5	13	28		NA	NA
	11/6/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
Trip Blank	1/29/2003	<0.45	NA	<0.82	NA	NA	<0.43	<0.89	NA	<0.68	<0.94	<0.92	<2.47		NA	NA
	4/15/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	7/30/2003	<0.3	NA	<0.6	NA	NA	<0.58	NA	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
	11/6/2003	<0.3	NA	<0.6	NA	NA	<0.58	<0.58	NA	<0.58	<0.52	<0.66	<1.84		NA	NA
PAL		0.5	0.5	140	NR	0.5	12	8	0.5	200	96	1000		NR	NR	
ES		5	5	700	NR	5	60	40	5	1000	480	10000		NR	NR	

Notes:

1. NA = Not analyzed or no data available.
2. PAL = Preventive Action Limit as defined in Chapter NR 140, Wisconsin Administrative Code.
3. ES = Enforcement Standard as defined in Chapter NR 140, Wisconsin Administrative Code.
4. 1,2-DCA = 1,2-Dichloroethane
5. MTBE = Methyl tert-butyl ether
6. TMB = Trimethylbenzene
7. DRO = Diesel Range Organics
8. GRO = Gasoline Range Organics
9. Bolded results exceed the PAL.
10. < = Results are less than the LOD.

Laboratory Footnotes:

- LOD = Limit of Detection
 LOQ = Limit of Quantitation
 E = Analyte concentration exceeds calibration range.
 Q = The analyte has been detected between the LOD and LOQ. The results are qualified due to the uncertainty of analyte concentrations within this range.

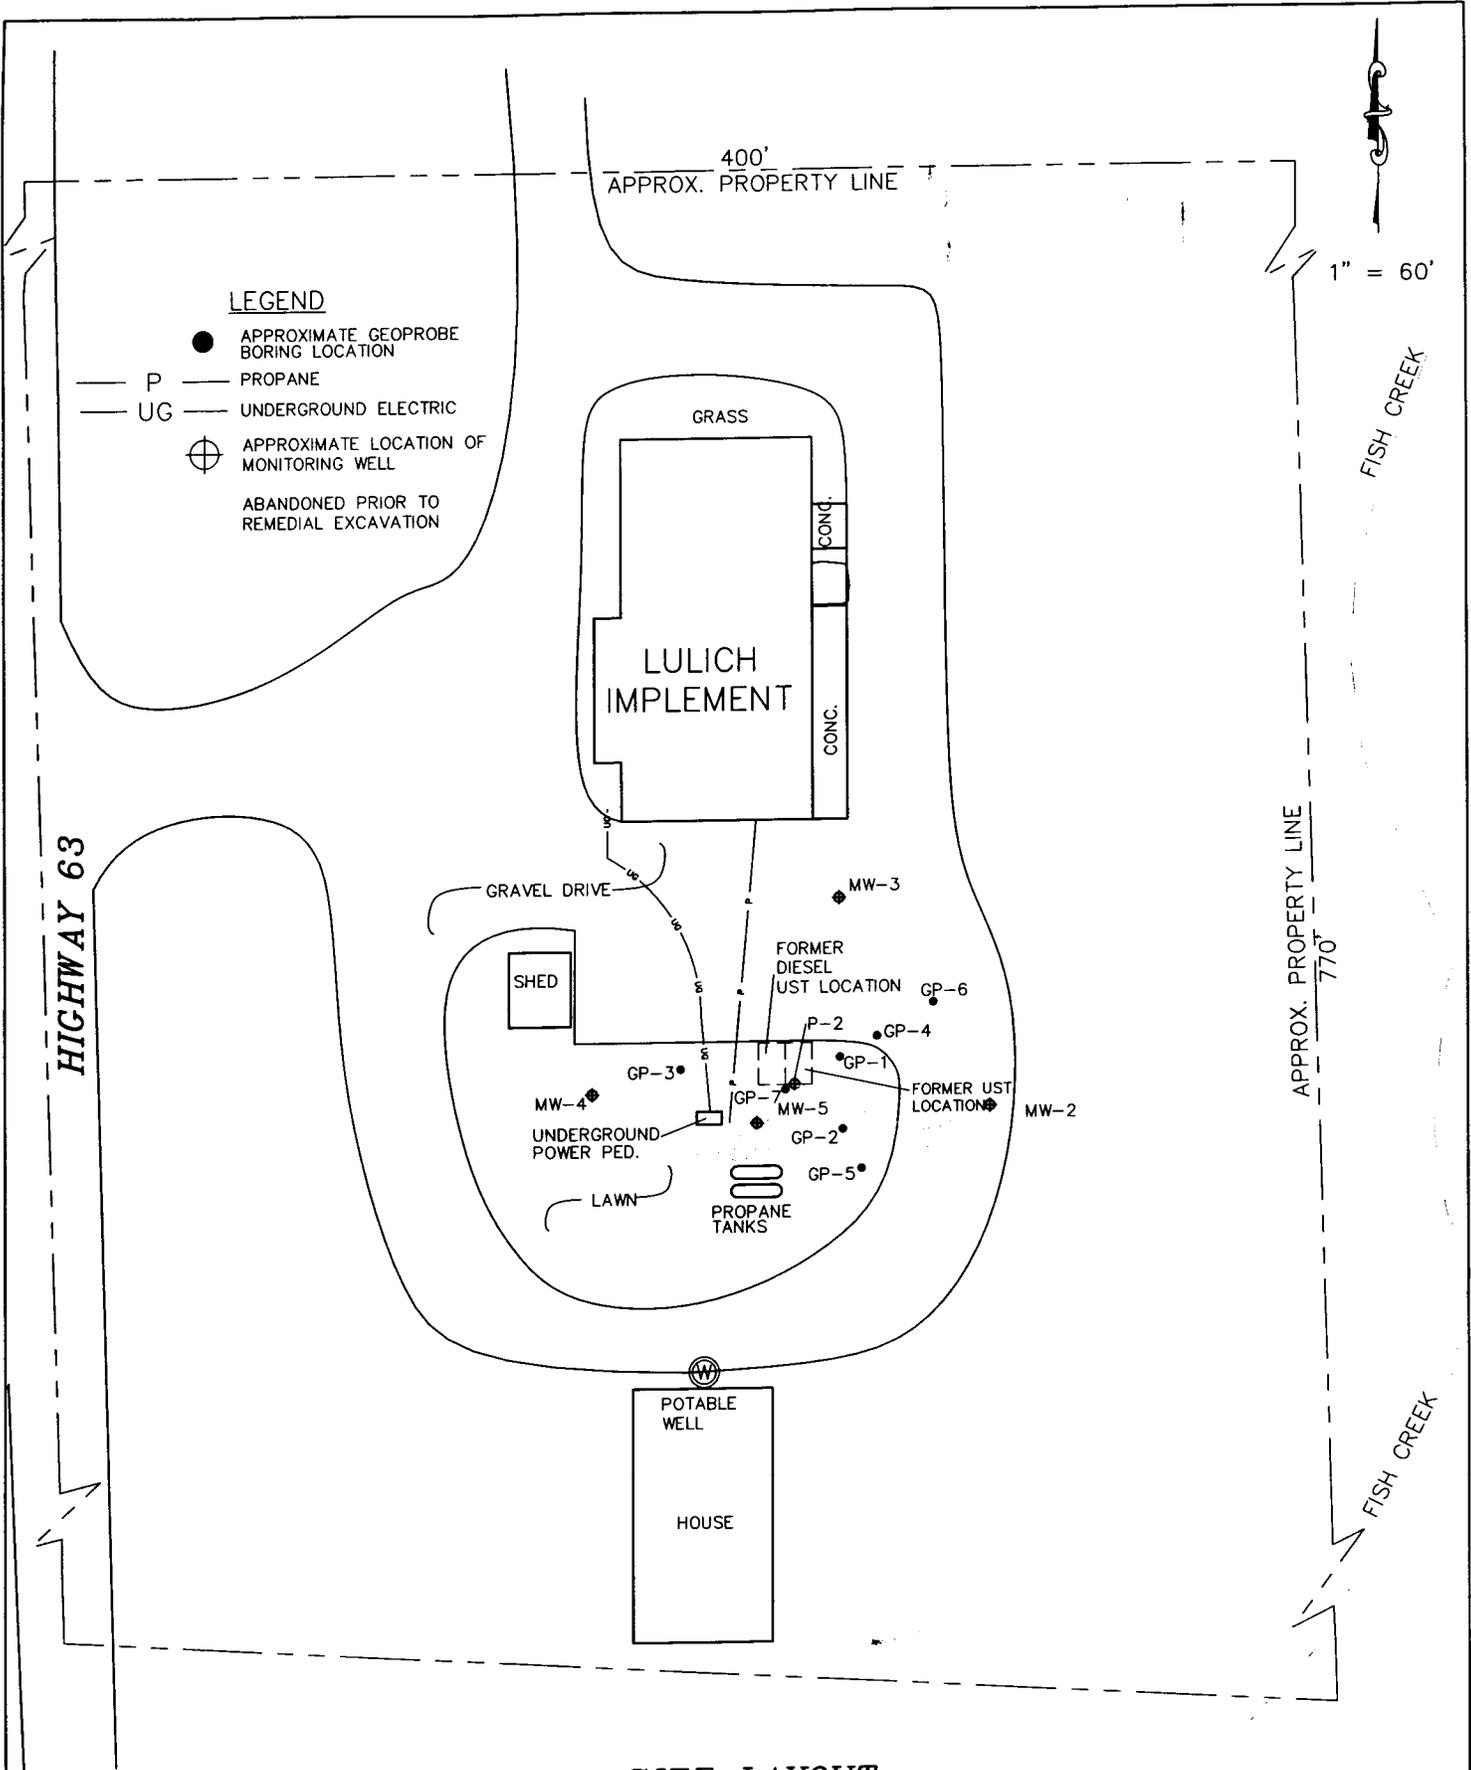

LEGEND

- APPROXIMATE GEOPROBE BORING LOCATION
- P — PROPANE
- UG — UNDERGROUND ELECTRIC
- ⊕ APPROXIMATE LOCATION OF MONITORING WELL
- ⊕ ABANDONED PRIOR TO REMEDIAL EXCAVATION

**SITE LAYOUT
LULICH IMPLEMENT, INC.
MASON, WISCONSIN**



COLEMAN ENGINEERING COMPANY
OF IRONWOOD
205 N. HARRISON STREET
IRONWOOD, MICHIGAN 49938

FIGURE 3

DATE: 8/11/04
JOB NO: 94630
CAD FILE: 94630-FIG3

C:\Users\jcm\Documents\94630\Fig3.dwg, 06/12/2004, 09:02:20 AM

Table 4
Field and Laboratory Soil Analyses Results – Post Remediation
Lulich Implement UST Site
Mason, Wisconsin

Sample ID	Sampling Date	Depth (feet, BGS)	Sampling location	DRO (mg/kg)	GRO (mg/kg)	Benzene (µg/kg)	Ethylbenzene (µg/kg)	MTBE (µg/kg)	Toluene (µg/kg)	Total Xylene (µg/kg)	1,2,4-TMB (µg/kg)	1,3,5-TMB (µg/kg)	Naphthalene (µg/kg)
#1	8/4/99	20	East Wall	2.1	31	185	576	<22	260	3133	3080	1030	955
#2	8/4/99	20	South Wall	2.8	6.2	394	146	<22	249	888	363	124	85
#3	8/4/99	20	West Wall	108	7.3	44	<4.5	<22	<4.2	<28	67	43	339
#4	8/4/99	20	Northwest Wall	2.9	12	1100	288	<22	2190	2031	725	215	446
#5	8/4/99	20	Northeast Wall	<1.4	11	1020	309	<22	2580	2178	669	199	236
#6	8/4/99	24	East Floor	1.4	11	1230	357	<22	2090	2433	781	224	218
#7	8/4/99	22	West Floor	5.1	6.0	106	47	<22	<4.2	67	121	47	224
DISPOSAL 1	8/4/99	NA	NA	NA	1010	5600	11400	<1100	<210	83400	43700	17300	38000
DISPOSAL 2	8/4/99	NA	NA	3130	1080	4840	15300	<1100	<210	133800	70700	26700	13200
DISPOSAL 3	8/4/99	NA	NA	1760	2560	12200	54800	6560	170000	449000	242000	80100	60700
WAC NR720 RCL			NA	100	100	5.5	2,900	NS	1,500	4,100	NS	NS	NS
NR 746 Table 1 Standards			NA	NS	NS	8,500	4,600	NS	38,000	42,000	83,000	11,000	2,700
NR 746 Table 2 Standards			NA	NS	NS	1,100	NS	NS	NS	NS	NS	NS	NS

BGS: Below Ground Surface
 MTBE: Methyl Tertiary Butyl Ether
 mg/kg: Milligram per kilogram or parts per million
 WACNR720: Wisconsin Administrative Code Chapter NR 720
 NA: Not Applicable
 Bold: Concentrations exceed WAC Chapter NR720 RCL

GRO: Gasoline Range Organics
 TMB: Trimethylbenzene
 µg/kg: Microgram per kilogram or parts per billion
 RCL: Residual Contamination Level
 NS: No Standard


LEGEND

- P — PROPANE
- UG — UNDERGROUND ELECTRIC
- 67.43 ⊕ APPROXIMATE LOCATION OF MONIT WITH GROUNDWATER ELEVATION
- ↑ ESTIMATED GROUNDWATER FLOW DIRECTION
- 80.5 — GROUNDWATER CONTOUR



LULICH IMPLEMENT

CONC.

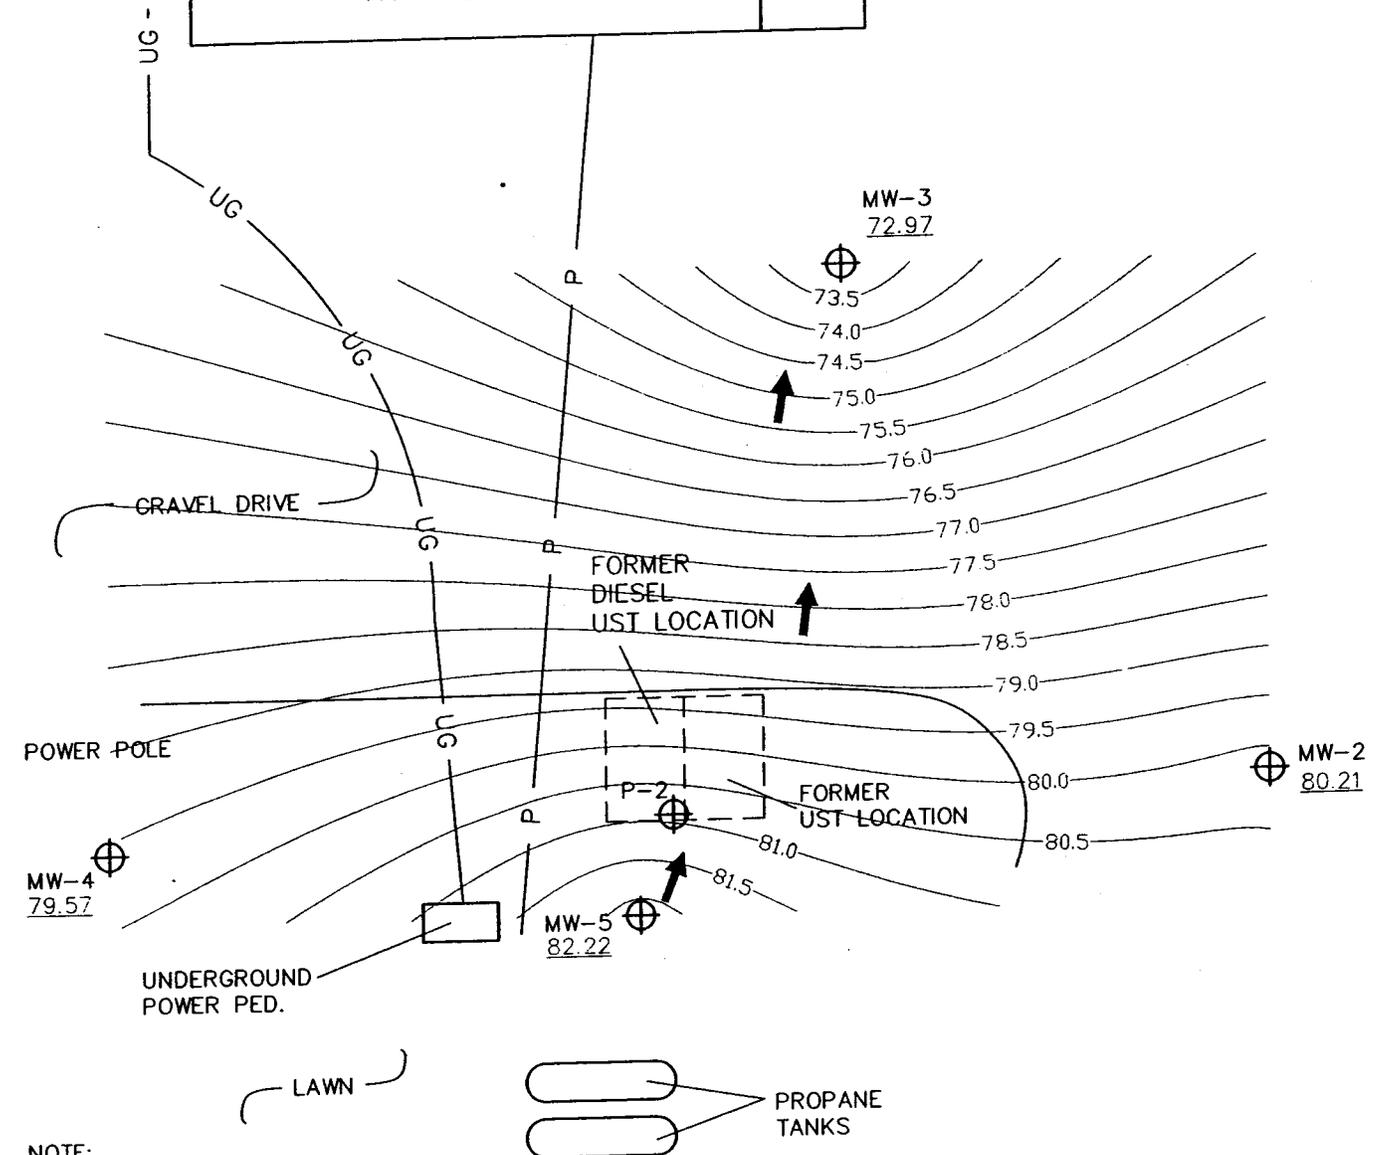

NOTE:
MW-1 ELEVATION WAS NOT USED IN DETERMINING FLOW DIRECTION DUE TO PRESENCE OF FREE PRODUCT.
P-1 HAS HAD NO RECORDABLE ELEVATIONS

**GROUNDWATER CONTOUR MAP
ELEVATIONS BASED UPON 4/20/04
LULICH IMPLEMENT, INC.
MASON, WISCONSIN**



COLEMAN ENGINEERING COMPANY
OF IRONWOOD
205 N. HARRISON STREET
IRONWOOD, MICHIGAN 49938

FIGURE 8

DATE: 8/11/04
JOB NO: 94630
CAD FILE: 94630-9


LEGEND

- P — PROPANE
- UG — UNDERGROUND ELECTRIC
- 67.43 ⊕ APPROXIMATE LOCATION OF MONIT WITH GROUNDWATER ELEVATION
- ↑ ESTIMATED GROUNDWATER FLOW DIRECTION
- 80.5 — GROUNDWATER CONTOUR

1" = 20'

LULICH IMPLEMENT

CONC.

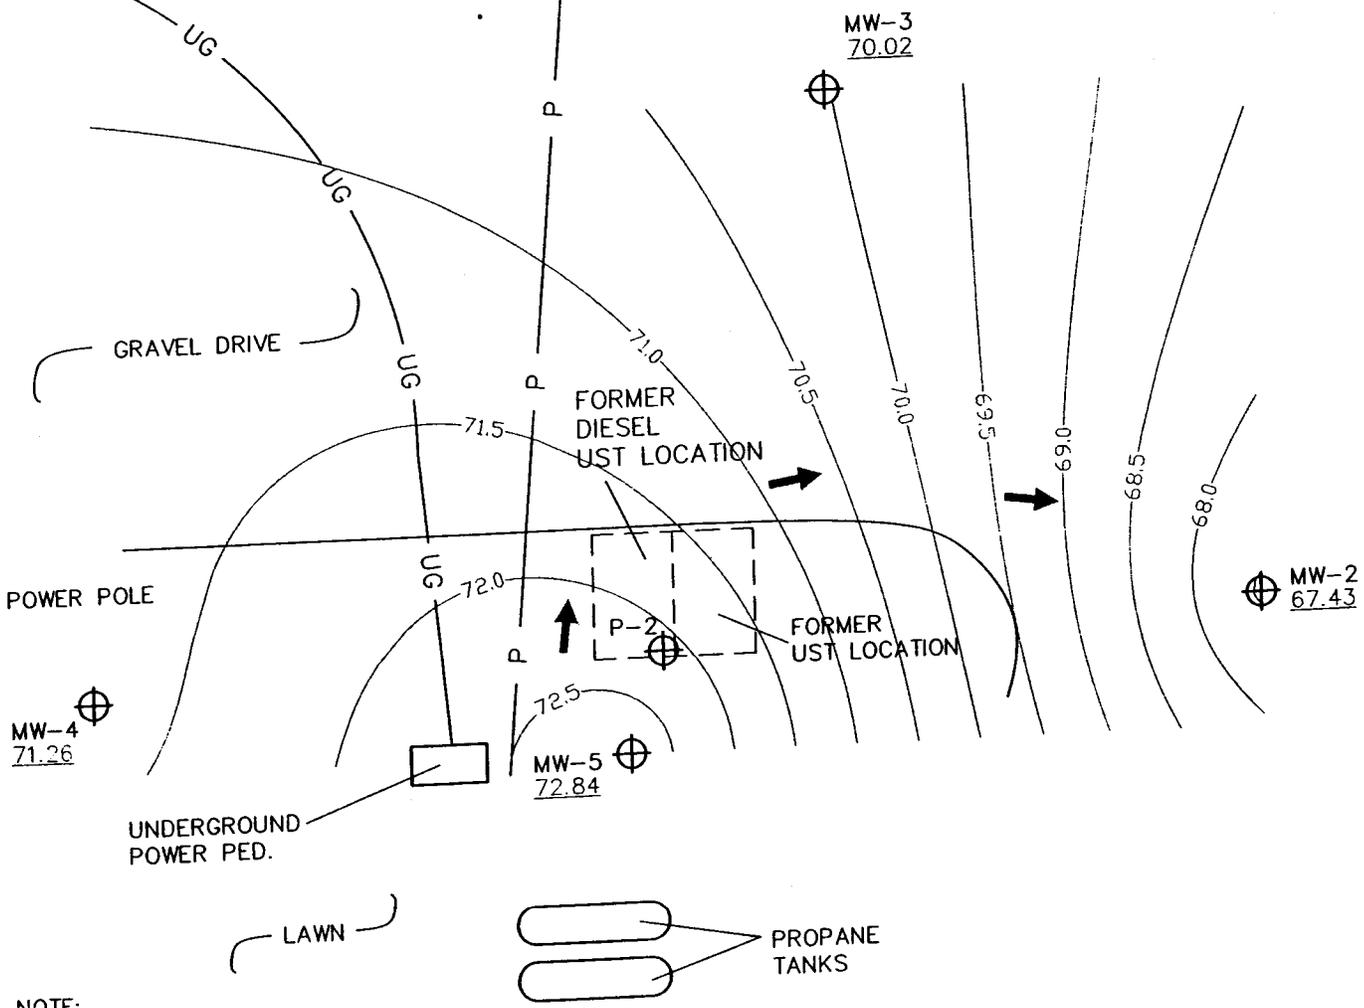


NOTE:
 MW-1 ELEVATION WAS NOT USED IN DETERMINING FLOW DIRECTION DUE TO PRESENCE OF FREE PRODUCT.
 P-1 HAS HAD NO RECORDABLE ELEVATIONS

**GROUNDWATER CONTOUR MAP
 ELEVATIONS BASED UPON 11/6/03
 LULICH IMPLEMENT, INC.
 MASON, WISCONSIN**

CE COLEMAN ENGINEERING COMPANY
 OF IRONWOOD
 205 N. HARRISON STREET
 IRONWOOD, MICHIGAN 49938

FIGURE 9

DATE: 8/11/04
 JOB NO: 94630
 CAD FILE: 94630-9
 F:\Data\94000\94630\94630\dwg\94630-9.dwg, FIG 9, 08/11/2004 02:48:28 PM

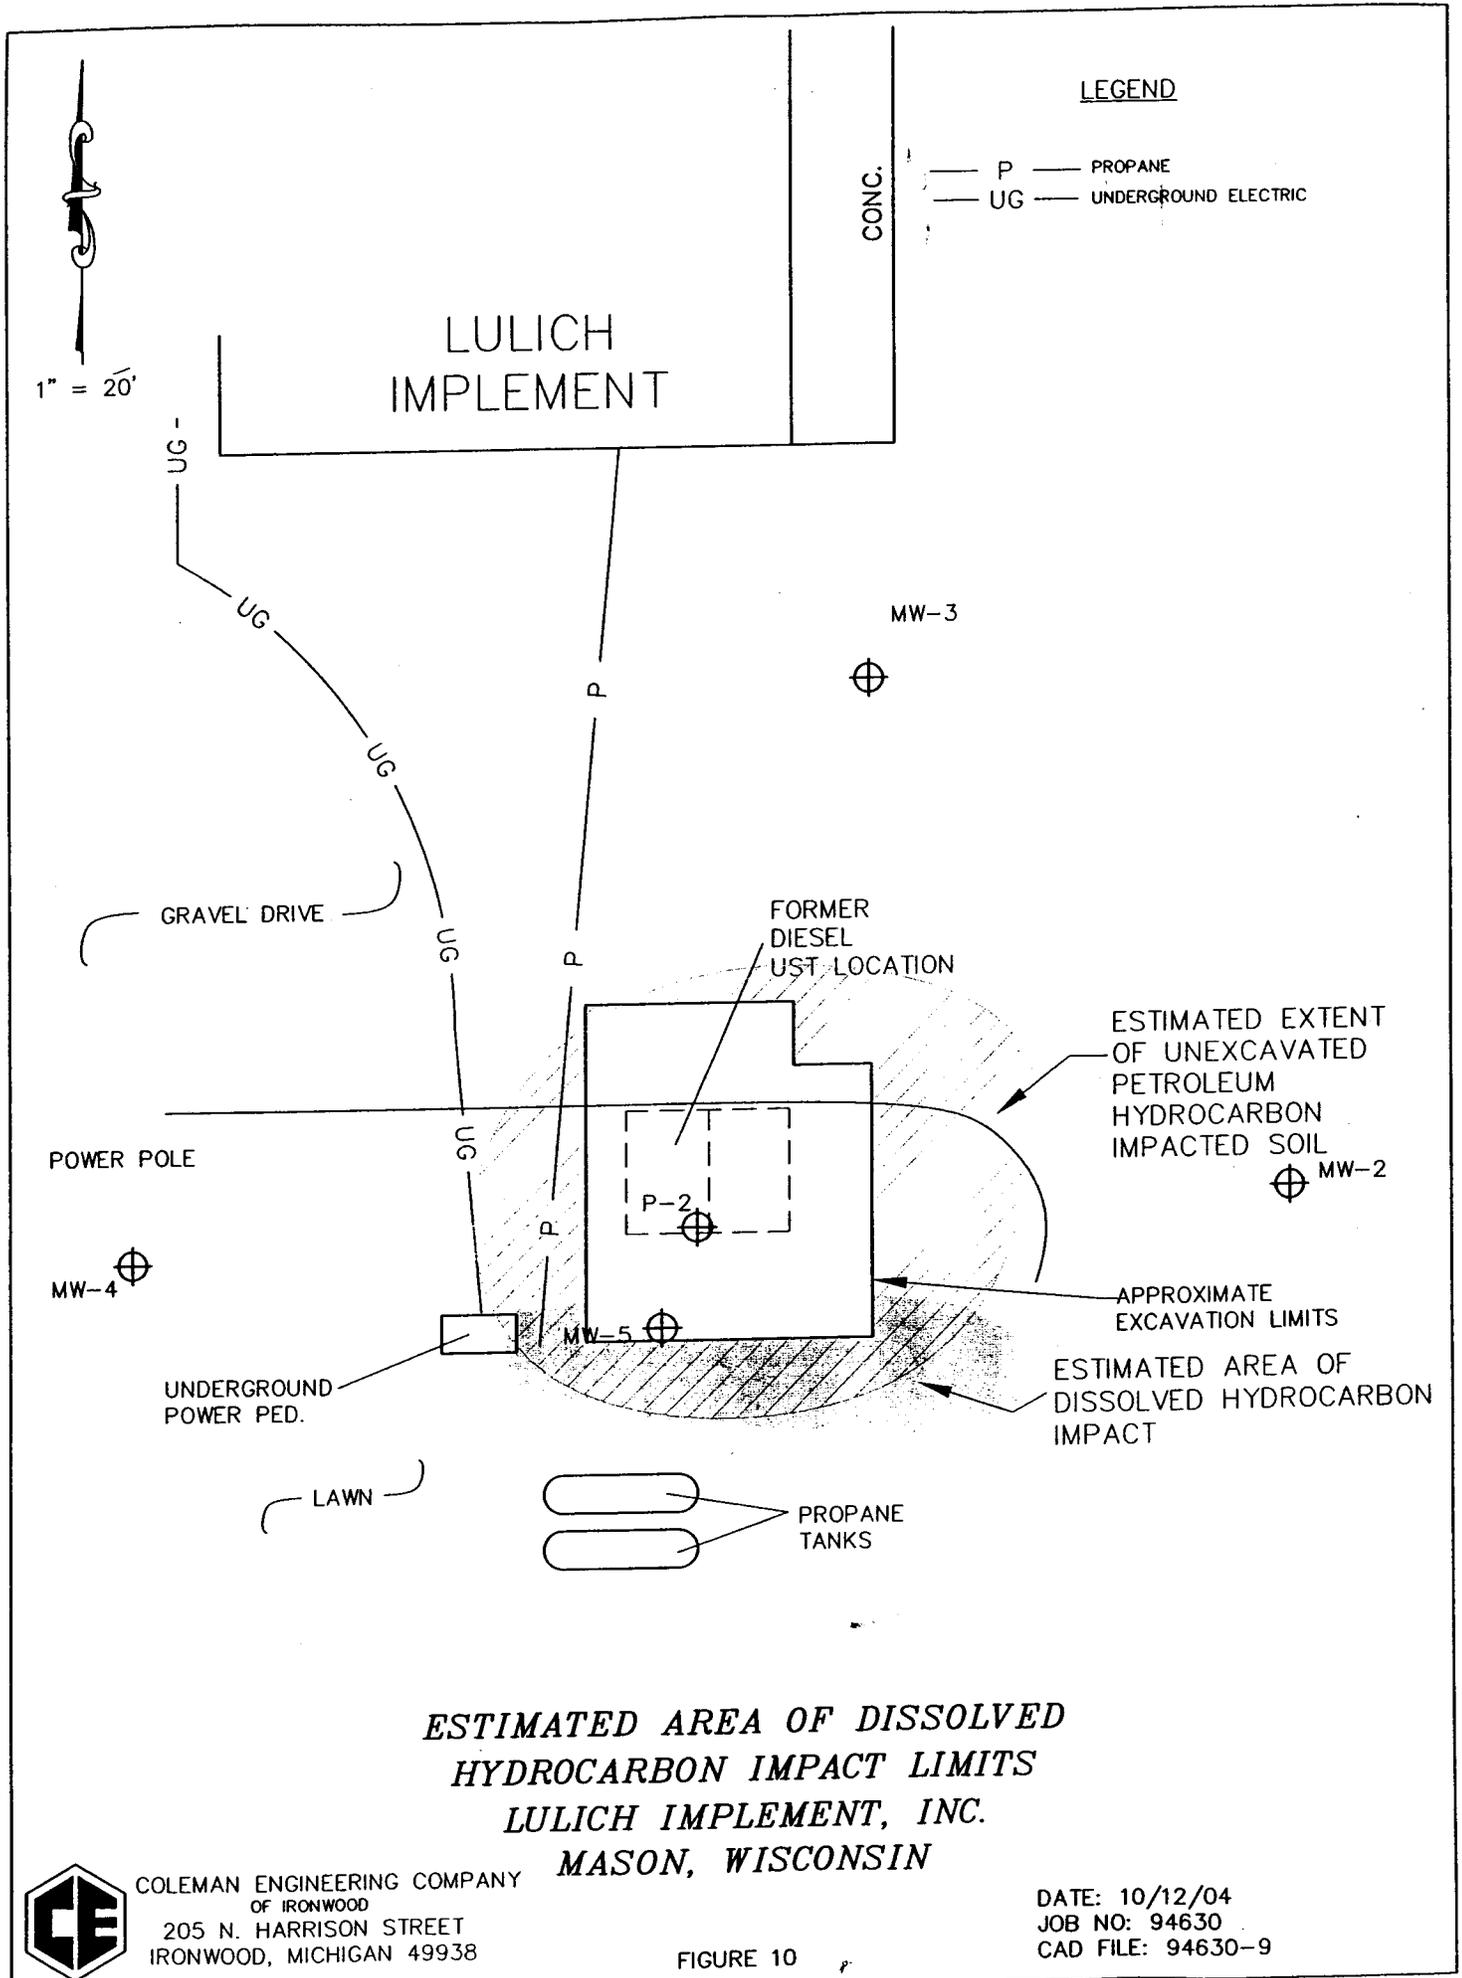

**ESTIMATED AREA OF DISSOLVED
HYDROCARBON IMPACT LIMITS
LULICH IMPLEMENT, INC.
MASON, WISCONSIN**

CE
 COLEMAN ENGINEERING COMPANY
 OF IRONWOOD
 205 N. HARRISON STREET
 IRONWOOD, MICHIGAN 49938

DATE: 10/12/04
 JOB NO: 94630
 CAD FILE: 94630-9

FIGURE 10

Table 8
Lulich Implement, Incorporated, Mason, Wisconsin
Former Gasoline and Diesel Fuel UST's
Groundwater Elevation Measurements


Well Number	Reference Point (Top of PVC Casing †)	Date	Depth To Free Product (Depth Below Reference Point)	Depth To Ground Water (Depth Below Reference Point)	Ground Water Elevation
MW-1	101.74	8/18/1996	20.5	20.55	81.19
		10/11/1996	24.13	24.15	77.59
		12/6/1996	18.84	18.86	82.88
MW-2	96.93	8/18/1996	---	16.85	80.08
		10/11/1996	---	21.36	75.57
		12/6/1996	---	13.44	83.49
		1/29/2003	---	18.27	78.66
		4/15/2003	---	23.00	73.93
		7/30/2003	---	21.78	75.15
		11/6/2003	---	29.50	67.43
		4/20/2004	---	16.72	80.21
MW-3	98.14	8/18/1996	---	20.94	77.2
		10/11/1996	---	22.70	75.44
		12/6/1996	---	19.13	79.01
		1/29/2003	---	20.12	78.02
		4/15/2003	---	27.90	70.24
		7/30/2003	---	25.02	73.12
		11/6/2003	---	28.12	70.02
		4/20/2004	---	25.17	72.97
MW-4	103.26	8/18/1996	---	23.12	80.14
		10/11/1996	---	27.02	76.24
		12/6/1996	---	17.93	85.33
		1/29/2003	---	25.37	77.89
		4/15/2003	---	30.57	72.69
		7/30/2003	---	28.15	75.11
		11/6/2003	---	32.00	71.26
		4/20/2004	---	23.69	79.57
MW-5	99.24	1/29/2003	---	19.47	79.77
		4/15/2003	---	24.50	74.74
		7/30/2003	---	22.25	76.99
		11/3/2003	---	26.40	72.84
		4/20/2004	---	17.02	82.22
P1	102.77	8/18/1996	---	Dry @35.0	---
		10/11/1996	---	Dry	---
		12/6/1996	---	Dry	---
P-2		1/29/2003	---	Dry @35.5	---
		7/30/2003	---	Dry	---
		4/15/2003	---	Dry	---
		11/6/2003	---	Dry	---
		4/20/2004	---	Dry	---

Note: --- = No measurement collected
† = Elevation based upon an established site datum assumed at 100.00 feet.

LEGEND

- APPROXIMATE GEOPROBE BORING LOCATION
 - P — PROPANE
 - UG — UNDERGROUND ELECTRIC
 - ⊕ APPROXIMATE LOCATION OF MONITORING WELL
 - ⊕ ABANDONED PRIOR TO REMEDIAL EXCAVATION
- DRO- DIESEL RANGE ORGANICS
 GRO- GASOLINE RANGE ORGANICS
 BEN- BENZENE
 PID- PHOTOIONIZATION DETECTOR READING (UNITS ISOBUTYLENE)

1" = 20'

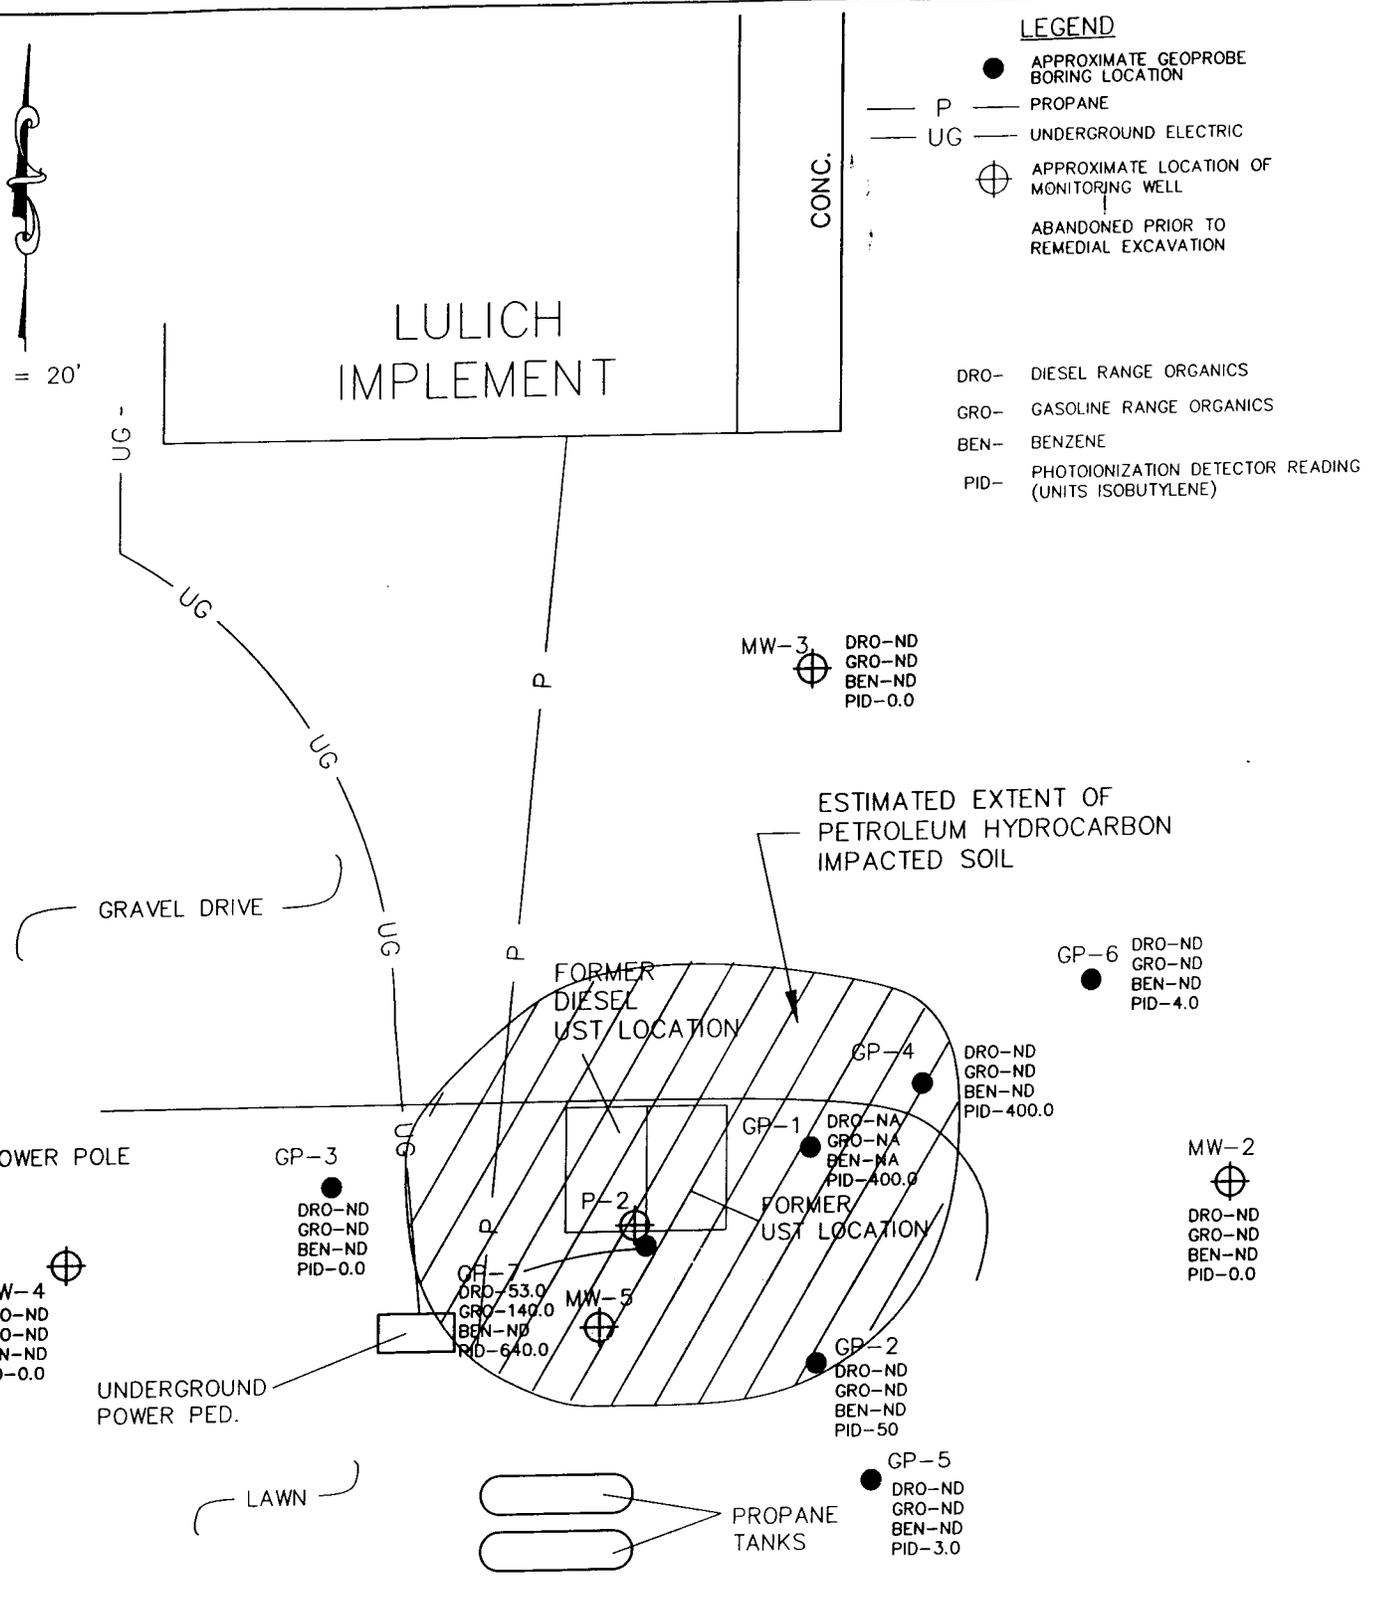

**ESTIMATED HORIZONTAL EXTENT - PRE REMEDIATION
 OF PETROLEUM HYDROCARBON IMPACTED SOIL
 LULICH IMPLEMENT, INC.**


MASON, WISCONSIN



COLEMAN ENGINEERING COMPANY
 OF IRONWOOD
 205 N. HARRISON STREET
 IRONWOOD, MICHIGAN 49938

DATE: 8/11/04
 JOB NO: 94630
 CAD FILE: 94630-01

FIGURE 5

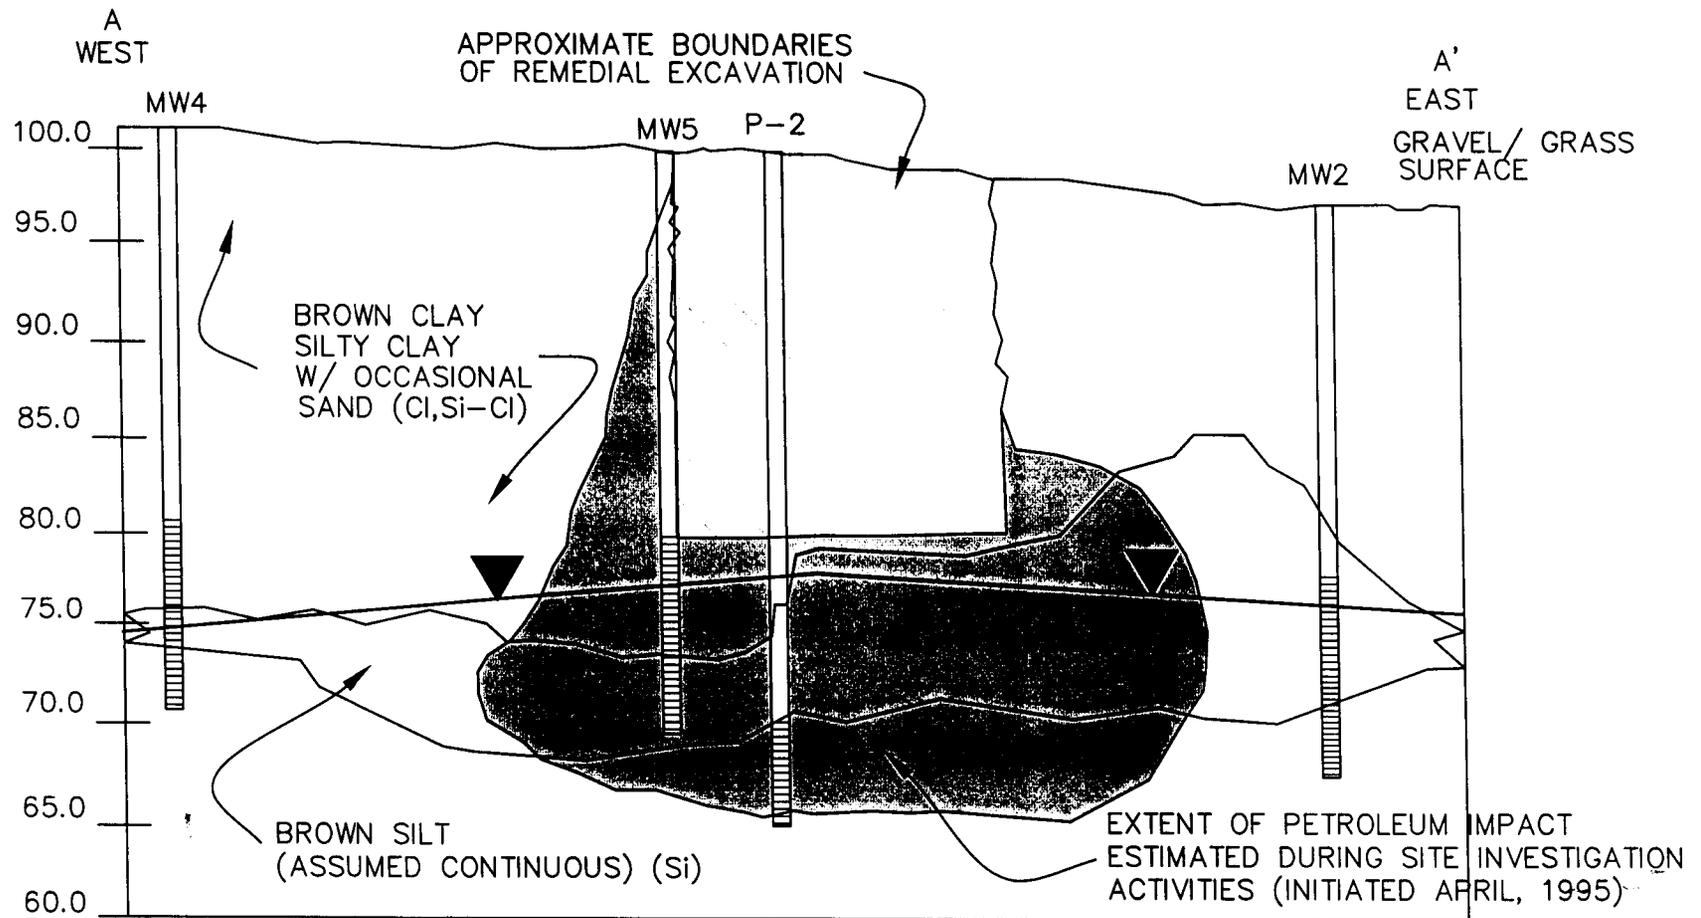

HORIZONTAL SCALE 1" = 20'
 VERTICAL SCALE 1" = 10'

LEGEND

▼ APPROXIMATE GROUND WATER TABLE
 BASED UPON 10/11/96 ELEVATIONS



COLEMAN ENGINEERING COMPANY
 635 CIRCLE DRIVE
 IRON MOUNTAIN, MICHIGAN 49801

FIGURE 7B
 ESTIMATED VERTICAL EXTENT
 OF IMPACT, POST REMEDIATION

DATE 8/11/04
 JOB NO 94630
 CADD FILE 94630-02

I, Peter Lulich, President of Lulich Implement, Inc., believe that the legal description included in this Case Summary and Close Out Form for the underground storage tank site, BRRTS# 03-04-000794, is complete and accurate.

Signed,

A handwritten signature in black ink, appearing to read "Peter Lulich" with a stylized flourish at the end.


Peter Lulich, President

Date 8-24-04

Lulich Implement, Inc.


LEGEND

P — PROPANE
UG — UNDERGROUND ELECTRIC

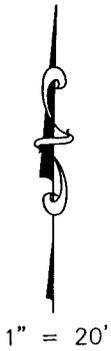

LULICH IMPLEMENT

CONC.

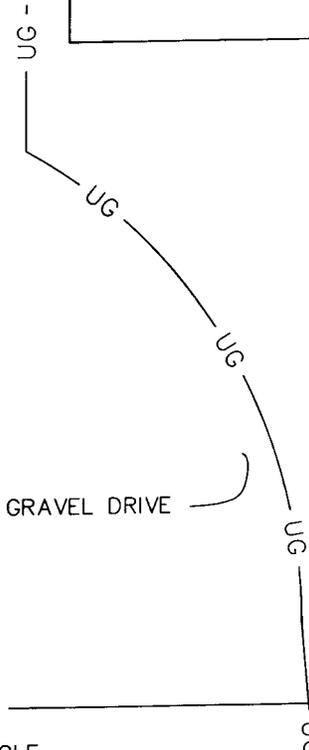


MW-3




GRAVEL DRIVE

FORMER DIESEL UST LOCATION

ESTIMATED EXTENT OF UNEXCAVATED PETROLEUM HYDROCARBON IMPACTED SOIL



POWER POLE



UNDERGROUND POWER PED.




MW-5



APPROXIMATE EXCAVATION LIMITS

ESTIMATED AREA OF DISSOLVED HYDROCARBON IMPACT

LAWN



PROPANE TANKS

**ESTIMATED AREA OF DISSOLVED HYDROCARBON IMPACT LIMITS
LULICH IMPLEMENT, INC.
MASON, WISCONSIN**






COLEMAN ENGINEERING COMPANY
OF IRONWOOD
205 N. HARRISON STREET
IRONWOOD, MICHIGAN 49938

DATE: 10/12/04
JOB NO: 94630
CAD FILE: 94630-9

FIGURE 10

LEGEND


- P — PROPANE
- UG — UNDERGROUND ELECTRIC

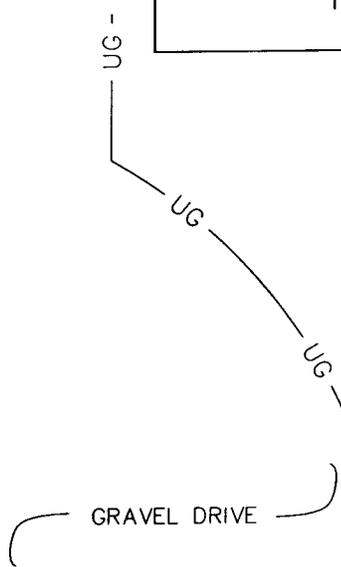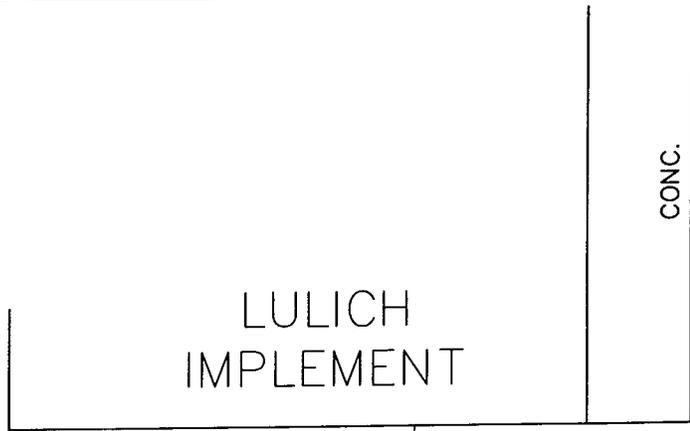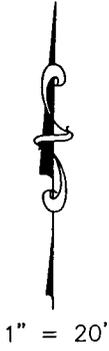


MW-3



FORMER DIESEL UST LOCATION

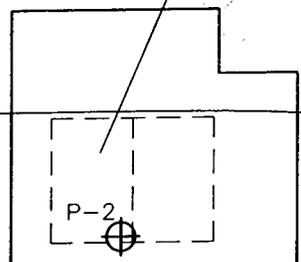

ESTIMATED EXTENT OF UNEXCAVATED PETROLEUM HYDROCARBON IMPACTED SOIL



POWER POLE

MW-4



UNDERGROUND POWER PED.




MW-5



APPROXIMATE EXCAVATION LIMITS

ESTIMATED AREA OF DISSOLVED HYDROCARBON IMPACT



PROPANE TANKS

**ESTIMATED AREA OF DISSOLVED
HYDROCARBON IMPACT LIMITS
LULICH IMPLEMENT, INC.
MASON, WISCONSIN**



COLEMAN ENGINEERING COMPANY
OF IRONWOOD
205 N. HARRISON STREET
IRONWOOD, MICHIGAN 49938

DATE: 10/12/04
JOB NO: 94630
CAD FILE: 94630-9

FIGURE 10