GIS REGISTRY
Cover Sheet

March, 2010
(RR 5367)

Source Property Information

CLOSURE DATE: Nov 15, 2010

BRRTS #: **02-71-379727**

FID #: 471040350

ACTIVITY NAME: Meritor - Rec 1 Heat Treat Tunnel

DATCP #:

PROPERTY ADDRESS: 1005 High Ave

COMM #:

MUNICIPALITY: Oshkosh

PARCEL ID #: 9050 76 10000

***WTM COORDINATES:**

X: **635761** Y: **395895**

** Coordinates are in WTM83, NAD83 (1991)*

WTM COORDINATES REPRESENT:

- (•) Approximate Center Of Contaminant Source
- ( ) Approximate Source Parcel Center

Please check as appropriate: (BRRTS Action Code)

Contaminated Media:

- [X] Groundwater Contamination > ES *(236)*
  - [ ] Contamination in ROW
  - [ ] Off-Source Contamination

  (***note:*** *for list of off-source properties see "Impacted Off-Source Property" form)*
- [X] Soil Contamination > *RCL or **SSRCL *(232)*
  - [ ] Contamination in ROW
  - [ ] Off-Source Contamination

  (***note:*** *for list of off-source properties see "Impacted Off-Source Property" form)*

Land Use Controls:

- [ ] N/A (*Not Applicable*)
- [ ] Soil: maintain industrial zoning *(220)*

  (***note:*** *soil contamination concentrations between non-industrial and industrial levels)*
- [ ] Structural Impediment *(224)*
- [ ] Site Specific Condition *(228)*
- [X] Cover or Barrier *(222)*

  (***note:*** *maintenance plan for groundwater or direct contact)*
- [ ] Vapor Mitigation *(226)*
- [ ] Maintain Liability Exemption *(230)*

  (***note:*** *local government unit or economic development corporation was directed to take a response action)*

Monitoring Wells:

Are all monitoring wells properly abandoned per NR 141? *(234)*

(•) Yes ( ) No ( ) N/A

** Residual Contaminant Level*
***Site Specific Residual Contaminant Level*

GIS Registry Checklist

This Adobe Fillable form is intended to provide a list of information that is required for evaluation for case closure. It is to be used in conjunction with Form 4400-202, Case Closure Request. The closure of a case means that the Department has determined that no further response is required at that time based on the information that has been submitted to the Department.

NOTICE: Completion of this form is mandatory for applications for case closure pursuant to ch. 292, Wis. Stats. and ch. NR 726, Wis. Adm. Code, including cases closed under ch. NR 746 and ch. NR 726. The Department will not consider, or act upon your application, unless all applicable sections are completed on this form and the closure fee and any other applicable fees, required under ch. NR 749, Wis. Adm. Code, Table 1 are included. It is not the Department's intention to use any personally identifiable information from this form for any purpose other than reviewing closure requests and determining the need for additional response action. The Department may provide this information to requesters as required by Wisconsin's Open Records law [ss. 19.31 - 19.39, Wis. Stats.].

BRRTS #: 02-71-379727 PARCEL ID #: 9050 76 10000

ACTIVITY NAME: Meritor - Rec 1 Heat Treat Tunnel WTM COORDINATES: X: 635761 Y: 395895

CLOSURE DOCUMENTS (the Department adds these items to the final GIS packet for posting on the Registry)

- [X] **Closure Letter**
- [X] **Maintenance Plan** (*if activity is closed with a land use limitation or condition (land use control) under s. 292.12, Wis. Stats.*)
- [ ] **Continuing Obligation Cover Letter** (for property owners affected by residual contamination and/or continuing obligations)
- [ ] **Conditional Closure Letter**
- [X] **Certificate of Completion (COC)** (for VPLE sites)

SOURCE LEGAL DOCUMENTS

- [X] **Deed:** The most recent deed as well as legal descriptions, for the **Source Property** (where the contamination originated). Deeds for other, off-source (off-site) properties are located in the **Notification** section.
  Note: *If a property has been purchased with a land contract and the purchaser has not yet received a deed, a copy of the land contract which includes the legal description shall be submitted instead of the most recent deed. If the property has been inherited, written documentation of the property transfer should be submitted along with the most recent deed.*
- [X] **Certified Survey Map:** A copy of the certified survey map or the relevant section of the recorded plat map *for those properties where the legal description in the most recent deed refers to a certified survey map or a recorded plat map.* (lots on subdivided or platted property (e.g. lot 2 of xyz subdivision)).

  Figure #: **Title: Alta Survey, Roehlig Land Surveying and Consulting, July 01, 2002**
- [X] **Signed Statement:** A statement signed by the Responsible Party (RP), which states that he or she believes that the attached legal description accurately describes the correct contaminated property.

MAPS (meeting the visual aid requirements of s. NR 716.15(2)(h))

Maps must be no larger than 11 x 17 inches unless the map is submitted electronically.

- [X] **Location Map:** A map outlining all properties within the contaminated site boundaries on a U.S.G.S. topographic map or plat map in sufficient detail to permit easy location of all parcels. If groundwater standards are exceeded, include the location of all potable wells within 1200 feet of the site.
  Note: *Due to security reasons municipal wells are not identified on GIS Packet maps. However, the locations of these municipal wells must be identified on Case Closure Request maps.*

  Figure #: 1 **Title: Property Location Map**
- [X] **Detailed Site Map:** A map that shows all relevant features (buildings, roads, individual property boundaries, contaminant sources, utility lines, monitoring wells and potable wells) within the contaminated area. This map is to show the location of all contaminated public streets, and highway and railroad rights-of-way in relation to the source property and in relation to the boundaries of groundwater contamination exceeding a ch. NR 140 Enforcement Standard (ES), and/or in relation to the boundaries of soil contamination exceeding a Residual Contaminant Level (RCL) or a Site Specific Residual Contaminant Levels (SSRCL) as determined under s. NR 720.09, 720.11 and 720.19.

  Figure #: 2, 23 **Title: Site Layout-REC Status, Location of NR 141 MWs and permanent Geoprobe wells**
- [X] **Soil Contamination Contour Map:** For sites closing with residual soil contamination, this map is to show the location of all contaminated soil and a single contour showing the horizontal extent of each area of contiguous residual soil contamination that exceeds a Residual Contaminant Level (RCL) or a Site Specific Residual Contaminant Level (SSRCL)as determined under s. NR 720.09, 720.11 and 720.19.

  Figure #: 19,21,22,29 **Title: PAH Non-Industr. Direct Contact , PAH Industr. DC, Lead Industr. DC, cap location map**

BRRTS #: 02-71-379727 ACTIVITY NAME: Meritor - Rec 1 Heat Treat Tunnel

MAPS (continued)

☒ **Geologic Cross-Section Map:** A map showing the source location and vertical extent of residual soil contamination exceeding a Residual Contaminant Level (RCL) or a Site Specific Residual Contaminant Level (SSRCL). If groundwater contamination exceeds a ch. NR 140 Enforcement Standard (ES) when closure is requested, show the source location and vertical extent, water table and piezometric elevations, and locations and elevations of geologic units, bedrock and confining units, if any.

Figure #: 17 **Title: East/West Geologic Cross-Section of REC 1**

Figure #: 18 **Title: North/South Geologic Cross-Section of REC 1-3A-13**

☒ **Groundwater Isoconcentration Map:** For sites closing with residual groundwater contamination, this map shows the horizontal extent of all groundwater contamination exceeding a ch. NR140 Preventive Action Limit (PAL) and an Enforcement Standard (ES). Indicate the direction and date of groundwater flow, based on the most recent sampling data.
Note: *This is intended to show the total area of contaminated groundwater.*

Figure #: 26 **Title: Extent of fill and barium impacted soil and groundwater at REC 17**

☒ **Groundwater Flow Direction Map:** A map that represents groundwater movement at the site. If the flow direction varies by more then 20° over the history of the site, submit 2 groundwater flow maps showing the maximum variation in flow direction.

Figure #: 24 **Title: Potentiometric surface map May 2007**

Figure #: 25 **Title: REC 17 Groundwater elevation contours and flow direction, November 19 2009**

TABLES (meeting the requirements of s. NR 716.15(2)(h)(3))

Tables must be no larger than 11 x 17 inches unless the table is submitted electronically. Tables must not contain shading and/or cross-hatching. The use of **BOLD** or *ITALICS* is acceptable.

☒ **Soil Analytical Table:** A table showing remaining soil contamination with analytical results and collection dates.
Note: This is one table of results for the contaminants of concern. Contaminants of concern are those that were found during the site investigation, that remain after remediation. It may be necessary to create a new table to meet this requirement.

Table #: 2,3,4,5,6 **Title: Soil Results, Soil-GW Ba data, PAH Soil Data, BaP Equivalents data, BenzoA RCL calculations**

☒ **Groundwater Analytical Table:** Table(s) that show the most recent analytical results and collection dates, for all monitoring wells and any potable wells for which samples have been collected.

Table #: 7 **Title: Summary of site-wide groundwater analytical results and comparison to WDNR criteria**

☒ **Water Level Elevations:** Table(s) that show the previous four (at minimum) water level elevation measurements/dates from all monitoring wells. If present, free product is to be noted on the table.

Table #: 10 **Title: Summary of static groundwater elevation data and LNAPL thickness**

IMPROPERLY ABANDONED MONITORING WELLS

For each monitoring well not properly abandoned according to requirements of s. NR 141.25 include the following documents.
Note: *If the site is being listed on the GIS Registry for only an improperly abandoned monitoring well you will only need to submit the documents in this section for the GIS Registry Packet.*

☒ **Not Applicable**

☐ **Site Location Map:** A map showing all surveyed monitoring wells with specific identification of the monitoring wells which have not been properly abandoned.
Note: *If the applicable monitoring wells are distinctly identified on the Detailed Site Map this Site Location Map is not needed.*

Figure #: **Title:**

☐ **Well Construction Report:** Form 4440-113A for the applicable monitoring wells.

☐ **Deed:** The most recent deed as well as legal descriptions for each property where a monitoring well was not properly abandoned.

☐ **Notification Letter:** Copy of the notification letter to the affected property owner(s).

BRRTS #: 02-71-379727 ACTIVITY NAME: Meritor - Rec 1 Heat Treat Tunnel

NOTIFICATIONS

Source Property

☐ **Not Applicable**

☒ **Letter To Current Source Property Owner:** If the source property is owned by someone other than the person who is applying for case closure, include a copy of the letter notifying the current owner of the source property that case closure has been requested.

☐ **Return Receipt/Signature Confirmation:** Written proof of date on which confirmation was received for notifying current source property owner.

Off-Source Property

Group the following information per individual property and label each group according to alphabetic listing on the "Impacted Off-Source Property" attachment.

☒ **Not Applicable**

☐ **Letter To "Off-Source" Property Owners:** Copies of all letters sent by the Responsible Party (RP) to owners of properties with groundwater exceeding an Enforcement Standard (ES), and to owners of properties that will be affected by a land use control under s. 292.12, Wis. Stats.
Note: *Letters sent to off-source properties regarding residual contamination must contain standard provisions in Appendix A of ch. NR 726.*

Number of "Off-Source" Letters:

☐ **Return Receipt/Signature Confirmation:** Written proof of date on which confirmation was received for notifying any off-source property owner.

☐ **Deed of "Off-Source" Property:** The most recent deed(s) as well as legal descriptions, for all affected deeded **off-source property(ies).** This does not apply to right-of-ways.
Note: *If a property has been purchased with a land contract and the purchaser has not yet received a deed, a copy of the land contract which includes the legal description shall be submitted instead of the most recent deed. If the property has been inherited, written documentation of the property transfer should be submitted along with the most recent deed.*

☐ **Letter To "Governmental Unit/Right-Of-Way" Owners:** Copies of all letters sent by the Responsible Party (RP) to a city, village, municipality, state agency or any other entity responsible for maintenance of a public street, highway, or railroad right-of-way, within or partially within the contaminated area, for contamination exceeding a groundwater Enforcement Standard (ES) and/or soil exceeding a Residual Contaminant Level (RCL) or a Site Specific Residual Contaminant Level (SSRCL).

Number of "Governmental Unit/Right-Of-Way Owner" Letters:

State of Wisconsin \ DEPARTMENT OF NATURAL RESOURCES

Jim Doyle, Governor
Matthew J. Frank, Secretary
Ronald W. Kazmierczak, Regional Director

Northeast Region Headquarters
2984 Shawano Ave,
Green Bay, WI 54313-6727
FAX 929-662-5413
TTY Access via Relay 711

November 15, 2010

DAVID O'CONNOR
MERITOR HEAVY VEHICLE LLC
2135 WEST MAPLE ROAD
TROY MI 48084

SUBJECT: Final Case Closure with Continuing Obligations
Meritor Heavy Vehicle (aka Axletech), 1005 High Avenue, Oshkosh, WI
VPLE #06-71-517594

Dear Mr. O'Connor:

The purpose of this letter is to summarize the closure of 18 identified Recognized Environmental Conditions (RECs) on this site and plan for the final Certificate of Completion. The Department considers this site closed and no further investigation or remediation is required at this time.

The Northeast Region Closure Committee reviewed the initial Requests for Closure on November 12, 2009. The Closure Committee reviews environmental remediation cases for compliance with state laws and standards to maintain consistency in the closure of these cases. Based on the correspondence and data provided, your case meets the closure requirements in ch. NR 726, Wisconsin Administrative Code. The final closure decision was based on the property being used for heavy industrial manufacturing at the time of closure.

While the Department considers this case closed, you and future property owners must comply with certain continuing obligations as explained in this letter. Because of the residual contamination and certain continuing obligations for this site, before use of this site can be changed to a residential, commercial, agricultural or other non-industrial use, notification of the Department is required, and additional investigation and/or cleanup may be required. You also need to pass this information about these continuing obligations on to anyone who purchases this property from you (i.e. pass on this letter).

Background and Summary

In 2003 Meritor (former Axletech) entered the Wisconsin Voluntary Party Exemption Program (VPLE) in order to fully assess the various areas of recognized environmental concern (RECs) on the property. A total of 18 RECs were investigated, evaluated, and remediated as necessary.

The entire Meritor property was developed on historic soil fill that contains concentrations of arsenic, lead, cadmium, and Polycyclic Aromatic Hydrocarbons (PAHs) that are higher than standard background levels. Current and future property owners and managers should be aware that the "Site-wide Materials Handling & Cap Maintenance Plan" must be followed when any excavation or construction work is planned at the property. This factor was taken into account when evaluating each REC for closure. Please refer to the attached Maintenance Plan for details.

The following is a summary of the RECs and their associated closure requirements [*Note: Benzo(a)Pyrene equivalents were calculated and used for determining risk and cap requirements*]:

- REC 17 – Site-wide Fill (BRRTS # 02-71-553456) → Several metals and PAHs are present across the property in excess of non-industrial and industrial soil standards. Therefore, Industrial Land Use is to be maintained at the entire property, in addition to several areas requiring cap maintenance because the concentrations exceed industrial levels of the site specific calculated Benzo(a)Pyrene equivalents.
- REC 1 – Heat Treat Tunnel (#02-71-379727) & REC 3A – Quench Tanks (#02-71-548684) → vegetable based quench oil removed to the extent practicable; however some does remain in place. Closure with maintenance of an engineered cap for concentrations related to the site-wide fill (REC 17).
- REC 2 – Assembly Area Underground Storage Tanks (UST) (#09-71-543963) → investigated and given "No Action Required" (NAR) status.
- REC 3B – Waste Oil UST (#09-71-415098) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 3C – Exterior Tank Area (#02-71-415152)→ Closure with Industrial Land Use.
- REC 3D – Coolant USTs (#09-71-548685) & REC 5 – VTLs (#09-71-415068)→ investigated and given "No Action Required" (NAR) status.
- REC 3G – Gear Lube USTs (#09-71-544839) → investigated and given "No Action Required" (NAR) status.
- REC 4 – HMCS (#02-71-415060) → investigated and given site specific closure [handle remaining contaminated soils as a solid waste]
- REC 6 – Radial Drill Coolant Pit (#09-71-415078) & REC 15 – Ex-Cell-O VTL (#09-71-415132) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 7 – Paint Booth Area (#09-71-543964) → investigated and given "No Action Required" (NAR) status.
- REC 8 & 10 – Waste Storage Rooms (#09-71-415088) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 11 – Coolant Mixing Room (#09-71-544862) → investigated and given "No Action Required" (NAR) status.
- REC 12 – Air Compressor Room (#09-71-415107) → investigated and given "No Action Required" (NAR) status.
- REC 13 – South Broaches Area (#09-71-415114) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based LNAPL presence from REC 1/REC 3A.
- REC 14 – Elevator Pit (#09-71-415125) → investigated and given "No Action Required" (NAR) status.

- REC 16 – Oil USTs (#03-71-415143) → Industrial Land Use must be maintained.
- REC 18 – Former Finishing Warehouse (#09-71-553639) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).

Continuing Obligations and Public Notice of Residual Contamination (GIS Registry)

While the Department considers this case closed, you and future property owners must comply with certain continuing obligations as explained in this letter.

In lieu of a restriction on your Deed, this site will be listed on the Remediation and Redevelopment Program's GIS Registry. The specific reasons are summarized below:

- Residual soil contamination exists that must be properly managed should it be excavated or removed;
- Before the land use may be changed from industrial to non-industrial, additional environmental assessment work may be necessary;
- Pavement, an engineered cover or a soil barrier must be maintained over contaminated soil and the state must approve any changes to this barrier;
- Groundwater contamination is present above Chapter NR 140 enforcement standards;

This letter and information that was submitted with your closure request application will be included on the GIS Registry. To review the sites on the GIS Registry web page, visit the RR Sites Map page at http://dnr.wi.gov/org/aw/rr/gis/index.htm. If the property is listed on the GIS Registry because of remaining contamination and you intend to construct or reconstruct a well, you will need prior Department approval in accordance with s. NR 812.09(4)(w), Wis. Adm. Code. To obtain approval, Form 3300-254 needs to be completed and submitted to the DNR Drinking and Groundwater program's regional water supply specialist. This form can be obtained on-line http://dnr.wi.gov/org/water/dwg/3300254.pdf or at the web address listed above for the GIS Registry.

Cover or Barrier

Pursuant to s. 292.12(2)(a), Wis. Stats., the pavement, building foundation and asphalt/compacted gravel cover that currently exists in the location shown on the attached map shall be maintained in compliance with the attached maintenance plan in order to prevent direct contact with residual soil contamination that might otherwise pose a threat to human health.

Prohibited Activities

The following activities are prohibited on any portion of the property where pavement, a building foundation, soil cover, engineered cap or other barrier is required as shown on the attached map, unless prior written approval has been obtained from the Wisconsin Department of Natural Resources: 1) removal of the existing barrier; 2) replacement with another barrier; 3) excavating or grading of the land surface; 4) filling on capped or paved areas; 5) plowing for agricultural cultivation; 6) construction or placement of a building or other structure.

Industrial Land Use Limitation

Soil and fill samples were taken on areas of the Property in areas not included in the areas covered by the cap maintenance plan that are representative of remaining residual soil contamination on this property that contained PAHs and several other metals in concentrations that exceeded NR 720.11, Table 2, Wis. Adm. Code, non-industrial soil standards and met NR 720.11, Table 2, Wis. Adm. Code, industrial soil standards or in concentrations that meet the site-specific industrial soil standards developed for this site.

Therefore, pursuant to s. NR 726.05(8)(b)1., Wis. Adm. Code, this property may not be used or developed for a residential, commercial, agricultural or other non-industrial use, unless (at the time that the non-industrial use is proposed) the property owner provides notification to the Department of Natural Resources of the change in land use and an investigation is conducted, to determine the degree and extent of the PAH and metal contamination that remains on the property, and remedial action is taken as necessary to meet all applicable non-industrial soil cleanup standards.

Residual Soil Contamination

Residual soils remain on the property containing PAHs and metals. If soil is excavated in the future, then pursuant to ch. NR 718 or, if applicable, ch. 289, Stats., and chs. 500 to 536, the property owner at the time of excavation must sample and analyze the excavated soil to determine if residual contamination remains. If sampling confirms that contamination is present the property owner at the time of excavation will need to determine whether the material is considered solid or hazardous waste and ensure that any storage, treatment or disposal is in compliance with applicable standards and rules. In addition, all current and future owners and occupants of the property need to be aware that excavation of the contaminated soil may pose an inhalation or other direct contact hazard and as a result special precautions may need to be taken to prevent a direct contact health threat to humans.

Residual Groundwater Contamination

Groundwater concentrations of various petroleum-related compounds and metals are greater than enforcement standards set forth in ch. NR140, Wis. Adm. Code. For more detailed information regarding the locations where groundwater samples have been collected (i.e., monitoring well locations) and the associated contaminant concentrations, refer to the Remediation and Redevelopment Program's GIS Registry at the RR Sites Map page at http://dnr.wi.gov/org/aw/rr/gis/index.htm.

DNR fact sheet, RR-819, "Continuing Obligations for Environmental Protection" has been included with this letter, to help explain a property owner's responsibility for continuing obligations on their property. You may obtain additional copies at http://dnr.wi.gov/org/aw/rr/archives/pubs/RR819.pdf.

Final VPLE Invoice

A Final invoice will be sent to you under separate cover when the internal work is completed and hours can be finalized.

Natural Attenuation Insurance

As noted in a previous email to you, the site will require natural attenuation insurance because groundwater contamination at the site exceeds NR 140 Wis. Adm. Code Enforcement Standard Exceedances.

Please submit the application for natural attenuation insurance as soon as possible along with the appropriate fee to the attention of our VPLE Coordinator:

Michael Prager, RR/5
State of Wisconsin
Department of Natural Resources
PO Box 7921
Madison WI 53707-7921

The application and fee schedule is included for your convenience and can also be found at the following web pages: http://www.dnr.state.wi.us/org/aw/rr/archives/pubs/4400-224.pdf (Application Form)
http://www.dnr.state.wi.us/org/aw/rr/archives/pubs/RR661.pdf (Fee schedule)

The Department appreciates your efforts to restore the environment at this site. If you have any questions regarding this closure decision or anything outlined in this letter, please contact Kathy Sylvester at (920) 424-0399.

Sincerely,

Roxanne Nelezen Chronert, Acting Team Supervisor
Northeast Region Remediation & Redevelopment Program

Attachments:

- Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers, Prepared by Arcadis, dated 10/14/2010
- Figure 3 Extent of Engineered Barriers with the photographic Locations depicting conditions. Prepared by Arcadis, dated 7/2/2010
  PUB-RR-819 Continuing Obligations for Environmental Protection
- PUB-RR-661 Insurance for VPLE sites using Natural Attenuation
- Form 4400-224 Environmental Insurance Application

e-cc: Case File – OSH
Michael Prager – CO
Gary Kjelleren – General Dynamics (via email: gkjeller@gdatp.com)
w/o attachments: Brian Maillet – Arcadis (via email: bmaillet@arcadis-us.com)

Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers

This Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers ("Plan") is applicable at the Property known as the Former Meritor Facility (Meritor) located at 1005 High Avenue in the city of Oshkosh, Winnebago County, Wisconsin ("Property"), and depicted on Figures 1 and 2. AxleTech International, Inc. (AxleTech) is currently continuing axle manufacturing operations at the Property. AxleTech is currently owned by General Dynamics Armament and Technical Products, Inc. (General Dynamics).

A copy of this Plan shall at all times be kept on file in the offices of: (1) the Wisconsin Department of Natural Resources (WDNR), Northeast Region; (2) the owner of the Property, currently General Dynamics, its successors and assigns (hereinafter identified collectively as the "Owner"); and (3) the Property manager, currently AxleTech (hereinafter identified collectively as the "Property manager"). The Plan shall be made available by the Property manager to contractors, utilities and maintenance personnel, and any other public or private persons or entities authorized to perform excavation work at the Property.

The purpose of this Plan is to describe the procedures and controls that shall be followed to properly manage (1) all unsaturated soils at the Property; (2) Cap elements that are protective of direct contact exposure with unsaturated soils and light non-aqueous phase liquid (LNAPL); (3) Cap elements that mitigate LNAPL migration, and (4) the existing subsurface setting that contains the natural redox gradient between Recognized Environmental Condition (REC) 17 and the Fox River. Unsaturated Soils are hereby defined as the full depth of soils, extending from the ground surface to the water table, which ranges from approximately 2 to 5 feet below ground surface (ft bgs). LNAPL is hereby defined as quench mineral oil that is a primary eye irritant and may be a skin irritant (see attached Material Safety Data Sheet) and has been identified in the subsurface soil vadose zone (approximately 4 to 6 ft bgs) at REC 1- Heat Treating Area, REC 3A- Former Quench Oil Underground Storage Tanks (USTs), and REC 13- Broaches Area.

The Cap elements protective of direct contact exposure are approved engineered barriers which may consist of the facility concrete flooring and foundation, the asphalt and gravel parking lots placed over the unsaturated soils, and any future concrete flooring or foundations, and asphalt or gravel parking surfaces placed over the unsaturated soils . The Cap elements that mitigate LNAPL migration are engineered barriers which consist of the current facility concrete flooring and foundation or any

future flooring, foundation, or pavement. It is understood that the current industrial zoning of the Property is a Cap element. The maintaining of the industrial setting is an administrative requirement of this Plan. The extents of the engineered barriers at the Property are shown on attached Figure 3.

The engineered barriers will be maintained in accordance with the Plan. Maintaining the function of the engineered barriers will continue to limit direct contact exposure with unsaturated soils and LNAPL that may be encountered during construction and maintenance activities at the Property. The engineered barriers will also mitigate LNAPL migration.

The WDNR and its successor and assigns (hereinafter identified collectively as the "Department") shall be notified of any activity that is not in accordance with this Plan.

Allowed Activities

The following allowed activities must comply with all listed requirements:

A1. Construction or Installation of Buildings, Structures or Other Improvements. Buildings, structures or other improvements may be constructed or installed on the Property using footings or other foundations that are placed into the unsaturated soils in the following manner:

A) The contractor performing the work shall be provided a copy of this Plan by the Property manager and shall prepare a health and safety plan, appropriate to the work being performed.

B) All materials used in the pavement or foundation shall not contain any hazardous waste. Unsaturated soils or granular layer materials that are excavated shall be separated and segregated to the extent practicable so that they may be replaced upon completion of the work following proper analytical testing of the soils in accordance with applicable solid waste regulations. Any such excavation of unsaturated soils or granular layer materials shall be conducted in accordance with the health and safety plan. All excavated unsaturated soils shall be, at a minimum, placed onto plastic sheeting and covered, or placed into a watertight container such as a covered roll-off box.

C) Upon completion of the work, previously excavated unsaturated soils and granular layer materials may be backfilled, provided, however, that the unsaturated soils are not classified as a solid or hazardous waste and the backfilled unsaturated soils maintain the compaction characteristics of the surrounding unsaturated soils. The unsaturated soils or granular layered material, as well as any additional clean soil or granular fill material necessary to backfill to grade, shall be backfilled in such a manner as to maintain the original depth of the unsaturated soils or granular layer material, as the case may be. The following shall be properly characterized and managed in accordance with state law with notice to the Department: 1) any previously excavated unsaturated soils; 2) any excavated granular material that has been commingled, mixed or otherwise in contact with unsaturated soils, which is not backfilled; and 3) any groundwater encountered and removed during construction.

D) A memorandum or report shall be prepared describing the work performed, identifying the person(s) performing the work and the date of the work, and confirming that the Plan was adhered to in completion of the work. A copy of the report shall be kept on file by the Property manager, and shall be filed with the Department.

A2. Utility Installations or Repairs. No utility repairs or installation of new or replacement utilities shall be conducted on the Property until after the utility and any contractor(s) for the utility have acknowledged receipt of a copy of this Plan. The utility repairs or installation(s) shall be conducted in strict conformance with the standards set forth below with respect to excavations into and/or beneath the Site, and such excavations are to be undertaken in the following manner:

A) The contractor performing the work shall be provided with a copy of this Plan by the Property manager and shall prepare a health and safety plan, appropriate to the work being performed.

B) Unsaturated soils or granular layer materials that are excavated, all for purposes of utility installation or repair, shall be separated and segregated to the extent practicable so that they may be replaced upon completion of the work following proper analytical testing of the soils in accordance with applicable solid waste regulations. All excavated unsaturated soils shall be, at a minimum, placed onto

plastic sheeting and covered, or placed into a watertight container such as a covered roll-off box.

C) Upon completion of such work, the excavated unsaturated soils may be placed back into the excavation, provided, however, that any excavated unsaturated soils placed back into the excavation are not classified as a solid or hazardous waste and that the soils maintain the compaction characteristics of the surrounding unsaturated soils.

D) Any excavation of unsaturated soils shall be conducted in accordance with the health and safety plan. Any such soils excavated from beneath the unsaturated soils shall be segregated, properly characterized and managed in accordance with state law with notice to the Department. Any other soils which have been commingled, mixed or otherwise have come into contact with soils excavated from beneath unsaturated soils shall be properly characterized and managed in accordance with state law with notice to the Department. Any soils which have been commingled, mixed or otherwise have come into contact with soils excavated from beneath 4 ft bgs at RECs 1, 3A, and 13 and may contain LNAPL shall be properly characterized and managed in accordance with state law with notice to the Department. Any groundwater affected by such activities shall be managed in accordance with state law after notice to the Department.

E) Clean fill used in connection with utility installation or construction shall not include any granular or porous material, but may include low strength flowable fill or other fill with low hydraulic conductivity.

F) If the utility installation or construction involves any disturbance of the seals used to seal the entrance of utility lines and the structures, such seals shall be replaced with new seals of like or superior quality.

G) A memorandum report shall be prepared describing the work performed, identifying the person(s) performing the work and the date of the work, and confirming that the Plan was adhered to in completion of the work. A copy of the report shall be kept on file with the utility, the Property manager, and shall be filed with the Department.

A3. Offsite Disposal of Excavated Soils. If it becomes necessary or desirable to dispose of excavated soils from the allowed construction, repair, and installation

activities, the excavation and resulting soils shall be managed in accordance with s. NR 718.13, Wis. Adm. Code.

Required Activities

R1. Annual Cap Inspections. Not less than annually, the Property shall be inspected by the Property manager to ensure that the integrity of the Engineered Barriers is maintained. The condition of the Engineered Barriers is important to protecting human health from direct contact with the underlying residually impacted soils. The Engineered Barriers can contain cracks, fissures, and shallow holes from normal usage and weather conditions and still be protective of direct contact. Hereafter, 'significant' cracks, fissures, and holes are defined as conditions which would lead to the compromise of the total cap integrity and/or would allow for humans to inadvertently contact the residual impacted soil beneath the Engineered Barriers. Any disturbances of the Engineered Barriers or significant fissures or cracks in the asphalt, gravel, or concrete caps shall be noted. The Engineered Barriers to be inspected are shown on Figure 3.

An engineered barrier inspection form shall be completed by the Property manager which identifies the date of the inspection, the individuals conducting the inspection; any observed disturbances of the Engineered Barriers and any significant fissures or cracks in the asphalt or concrete caps. A copy of the engineered barrier inspection form is attached. All inspection forms shall be maintained on file by the Property manager for a period of 3 years.

R2. Repairs to Capped Areas. If, during the annual inspections or other routine inspections of the Property, the Engineered Barriers (see Figure 3) are observed to have been disturbed or significant fissures, cracks or erosional features are observed in the asphalt, gravel, or concrete caps, the Property manager shall arrange to have repairs made to such areas, in a manner consistent with section A1 of this Plan. Such repairs shall be carried out within a reasonable period of time subject to weather and seasonal considerations. All repairs shall be documented on the attached work order form, which will be maintained on file by the Property manager.

R3. Maintaining the Natural Redox Gradient. The existing subsurface setting located between the Engineered Barrier for REC 17 and the Fox River shall be maintained to ensure the existing natural redox gradient continues to precipitate dissolved barium from groundwater to regulatory levels that are acceptable to

the WDNR. Repairs and maintenance of the surface grade, including the existing jogging trail, are acceptable under this Plan.

Request for Deviations

The Property manager and Owner shall not conduct any activities at Property that are not in compliance with this Plan, unless written approval to do so is obtained from the Department.

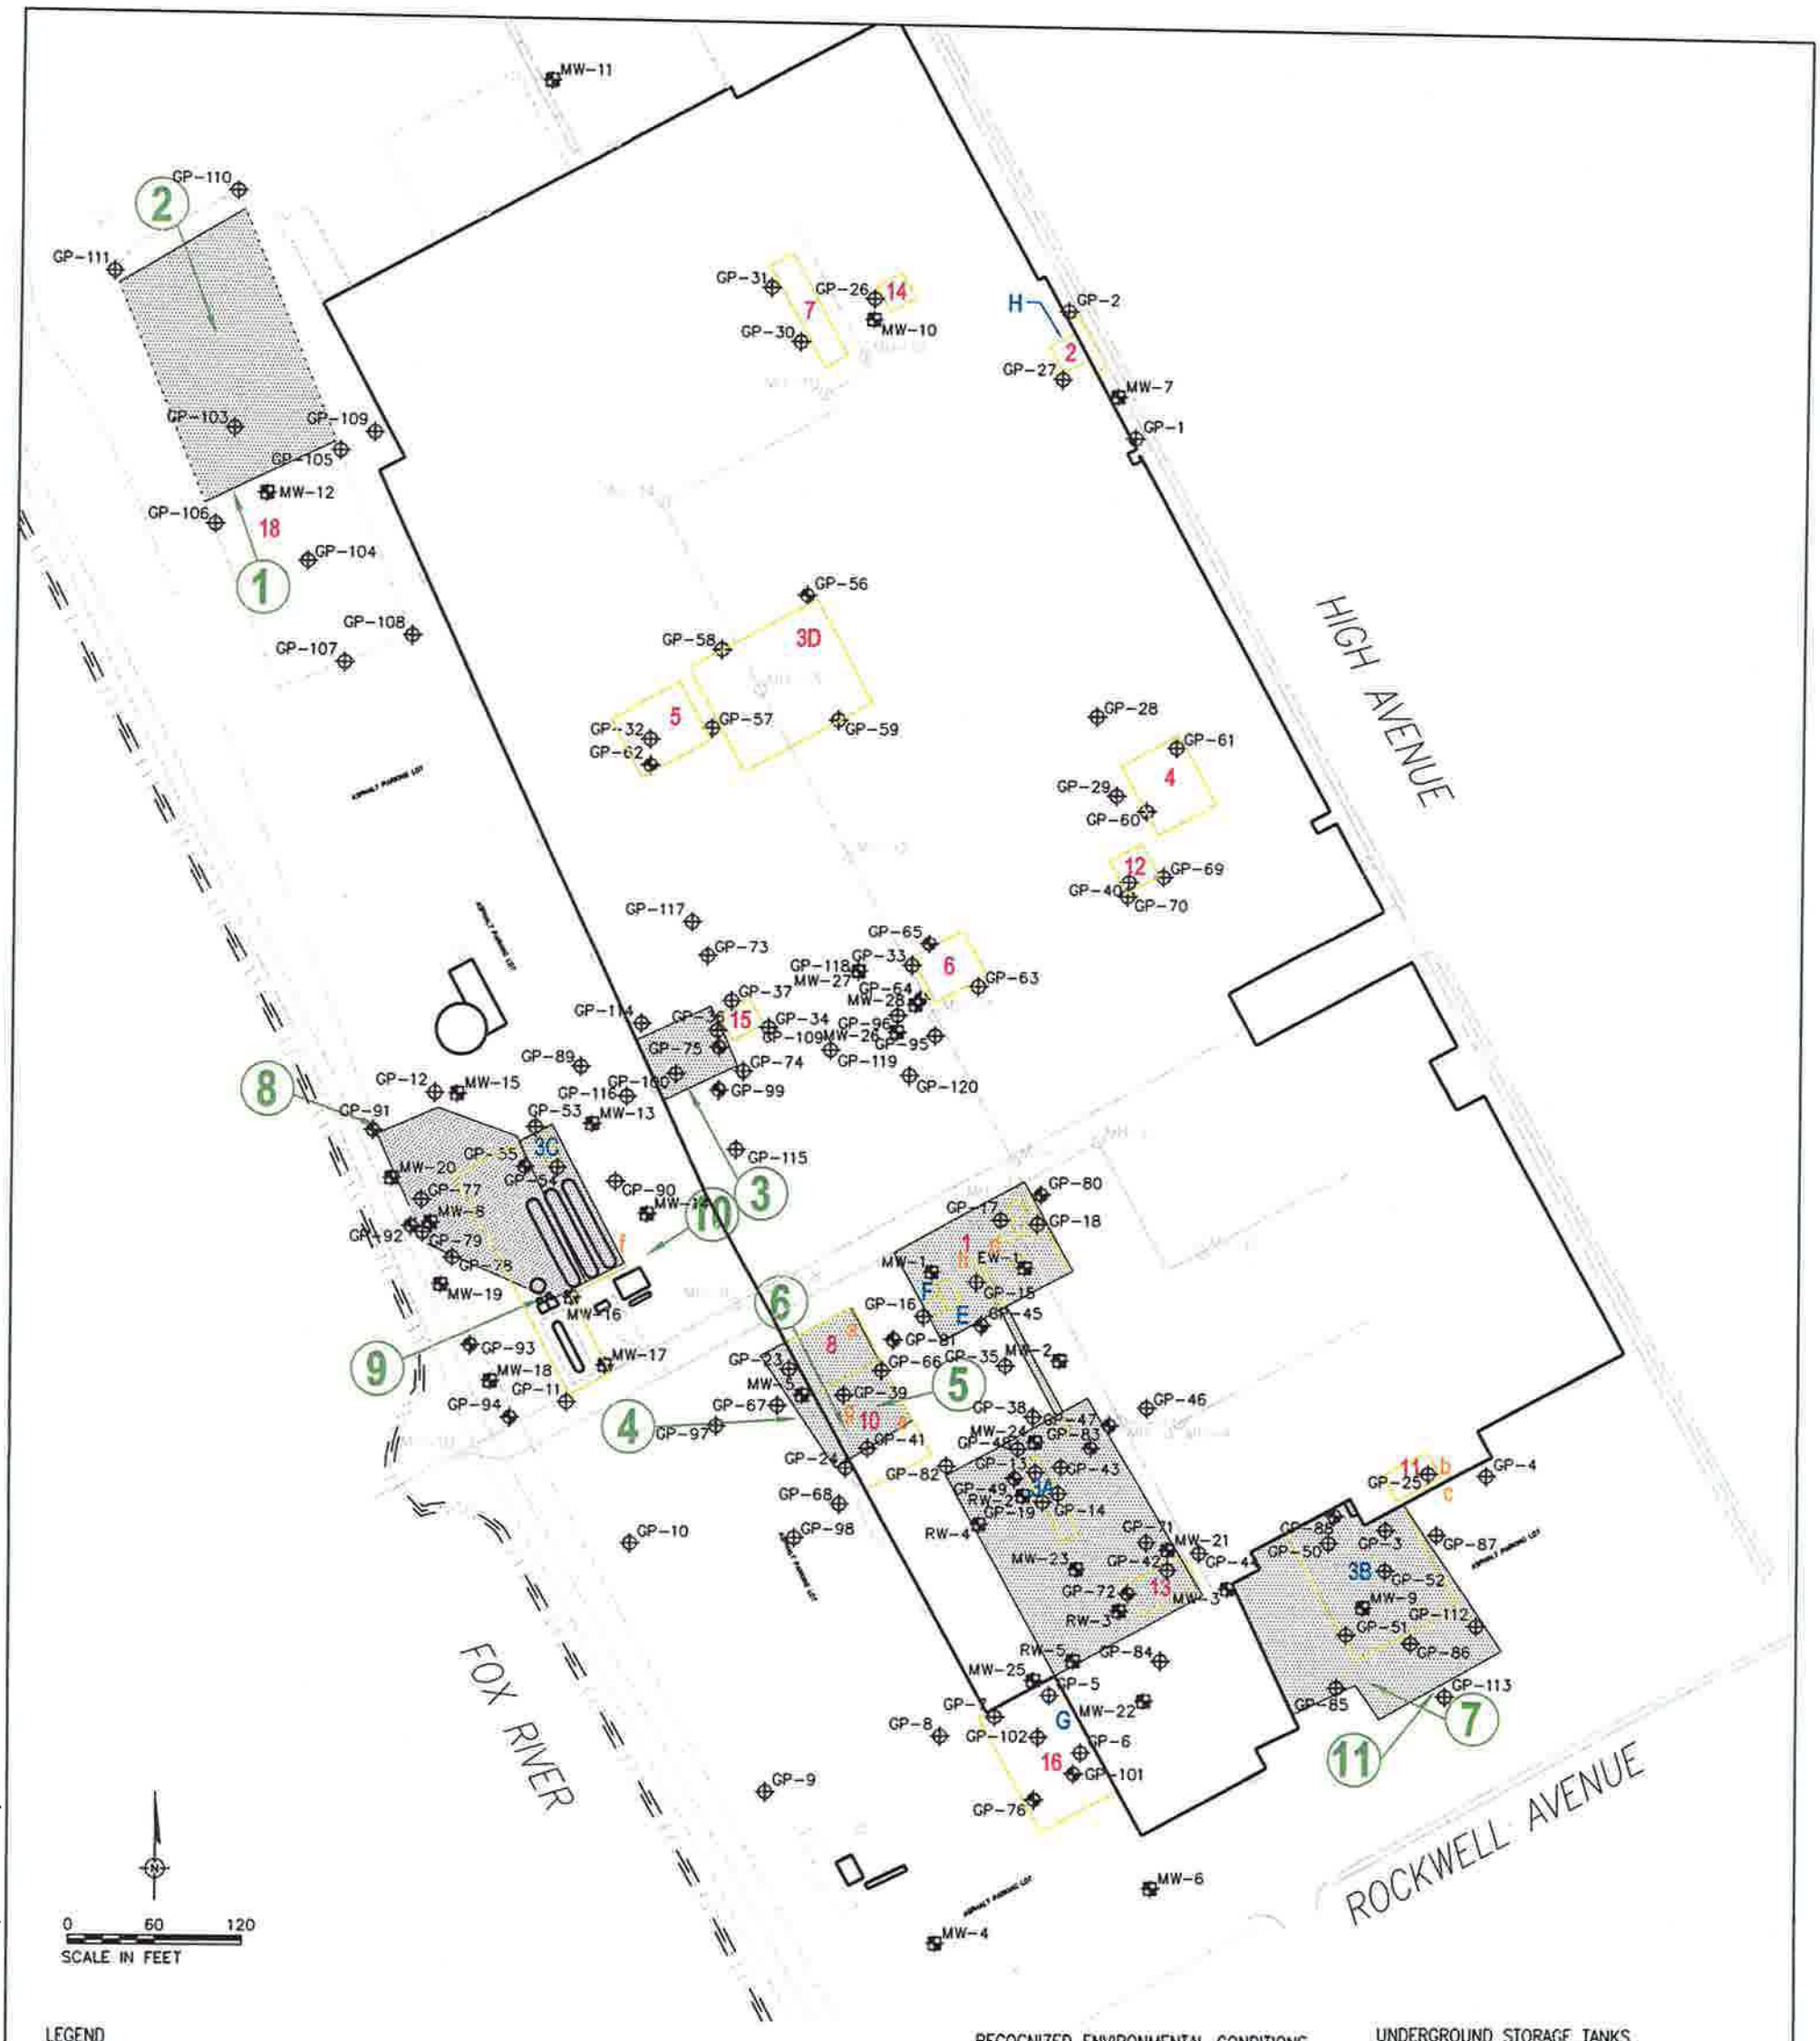

0 60 120

SCALE IN FEET

LEGEND

- GP-4 — GEOPROBE BORING
- GP-76 — GEOPROBE BORING/MONITORING WELL
- MW-1 — MONITORING WELL
- MANHOLE
- STORM SEWER LINE
- EXTENT OF ENGINEERED BARRIER
- ④ — ENGINEERED BARRIER CONDITION (SEE PHOTOGRAPHIC LOG)

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

RECOGNIZED ENVIRONMENTAL CONDITIONS

1. HEAT TREATING AREA TUNNEL, QUENCH OIL TANKS AND PITS
2. ASSEMBLY AREA
3. REMOVED USTs
   - A FIVE 4,000-GALLON QUENCH OIL STORAGE
   - B ONE 2,000-GALLON WASTE OIL
   - C ONE 5,000-GALLON FUEL OIL
   - D FOUR 40-GALLON COOLANT
4. HORIZONTAL MACHINING CENTERS (HMCs)
5. VERTICAL TURNING LATHES (VTLs)
6. RADIAL DRILL COOLANT PIT
7. PAINT BOOTH AREA
8. FLAMMABLE LIQUIDS AND HAZARDOUS WASTE STORAGE AREA
9. BOILER ROOM
10. CHEMICAL AND UNIVERSAL WASTE STORAGE
11. COOLANT MIXING ROOM
12. AIR COMPRESSOR ROOM
13. SOUTHERN BROACHES
14. ELEVATOR PIT
15. EX-CELL-O VTL
16. OIL USTs
17. FILL MATERIAL

UNDERGROUND STORAGE TANKS

- 3A FIVE 4,000-GALLON QUENCH OIL STORAGE
- 3B ONE 2,000-GALLON WASTE OIL
- 3C ONE 5,000-GALLON FUEL OIL
- 3D FOUR 40-GALLON COOLANT
- E ONE 10,000-GALLON TANK - QUENCH OIL (COMBINED WITH REC 1)
- F ONE 1,500-GALLON TANK - RESERVE QUENCH OIL (COMBINED WITH REC 1)
- G TWO 8,000-GALLON, FOUR 4,000-GALLON, AND ONE 2,000-GALLON TANKS - OIL STORAGE (REC16)
- H TWO 4,000-GALLON TANKS - GEAR LUBE (REC 2)

ABOVEGROUND STORAGE TANKS

- a THREE 450-GALLON TANKS - OIL (REC 8)
- b ONE 2,000-GALLON TANK - COOLANT (REC 11)
- c ONE 500-GALLON TANK - MINERAL SPIRITS (REC 11)
- d TWO 350-GALLON TANKS, ONE 600-GALLON TANK, ONE 600-GALLON TANK - QUENCH OIL (REC 1)
- e SIX 800-GALLON TANKS - WASTEWATER STORAGE (REC 10)
- f THREE 30,000-GALLON TANKS - PROPANE, ONE 11,000-GALLON TANK - METHANOL, ONE 1,000-GALLON TANK - AMMONIA
- g TWO 1,000-GALLON TANKS - WASTE OIL (REC 10)
- h ONE 7,000-GALLON TANK, THREE 1,200 GALLON TANKS, TWO 1,000-GALLON TANKS, AND TWO 800-GALLON TANKS - QUENCH OIL (REC 1)

Area Manager: M. MAERLE
Project Director: E. SUC
Task Manager: B. MALLET
Technical Review: T. REVIEW

© 2007 ARCADIS G&M, Inc.

ARCADIS
128 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

EXTENT OF ENGINEERED BARRIERS WITH THE PHOTOGRAPHIC LOCATIONS DEPICTING CONDITION

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: WI001016
Date: 7/02/10
Figure: 3

Layout Name: Layout1 Plot Date\Time: Tue, 13 Jul 2010 - 12:23pm Plot Table: BLACKGRAY-THIN.ctb Layout Use: Figure 3
Acad Version: R18.0s (LMS Tech) Path\Name: G:\Project\Meritor\WI1016\Oshkosh\cadd\Engineered Barried All.dwg

ENGINEERED BARRIER
Annual Inspection Form
Facility Located at
1005 High Avenue, Oshkosh, Wisconsin
BRRTS VPLE #: 06-71-517594

Name of Inspector:_____
Company: _____
Date: _____
Time: _____

Inspector able to inspect all engineered barriers (see Figure 3)? ❑Yes ❑ No
If no, explain: _____

_____

_____

Is this a scheduled inspection? ❑Yes ❑ No
If no, explain: _____

_____

Inspection Results:

Engineered Barrier Condition:

- Significant fissures, cracks, and shallow holes that would allow for humans to inadvertently contact the underlying residually impacted soils:
  _____

  _____

  _____

  _____
- Significant fissures, cracks, and shallow holes that would allow for surface water infiltration at the heat treat, former quench oil, and broches areas:
  _____

  _____

  _____
- Other:
  _____

If any of the above conditions were observed, note area and explain. Sketch or photograph extent and location of observed damage below (or on a separate attachment):

ENGINEERED BARRIER
Work Order
Facility Located at
1005 High Avenue, Oshkosh, Wisconsin
BRRTS VPLE #: 06-71-517594

Report Number:_____
Date of Initial Inspection: _____
Name of Inspector: _____

Type of problem: _____
_____
Required upgrade: _____
_____
Completed on: _____
Comments: _____
_____
Corrective action assigned to/completed by:

_____ _____
Name/Company Date

Reinspection Information

Observations: _____
_____
Comments: _____
_____
Inspector: _____ _____
Signature Date

State of Wisconsin
Department of Natural Resources

CERTIFICATE OF COMPLETION OF RESPONSE ACTIONS UNDER SECTION 292.15(2)(ae), WIS. STATS.

Whereas, **Axletech International Inc** has applied for an exemption from liability under s. 292.15, Wis. Stats., for the property located at 1005 High Street, Oshkosh, Wisconsin, which is commonly referred to as the **Arvin Meritor** site, further described in the legal description found on Attachment A (the "Property");

Whereas, an environmental investigation of the Property has been conducted and the Wisconsin Department of Natural Resources ("WDNR") has determined that environmental contamination exists at the Property;

Whereas, **Axletech International Inc** has submitted to the WDNR certain investigation reports and a remedial action plan for the Property which comply with the requirements set forth in chs. NR 700-754, Wis. Adm. Code, consisting of the documents and reports listed in Attachment B;

Whereas, in accordance with s. 292.15(2)(ae)1, Wis. Stats., in a letter dated March 27, 2007 the WDNR determined that an environmental investigation has been conducted which adequately identified and evaluated the nature and extent of the hazardous substance discharges on the Property;

Whereas, the Wisconsin Department of Natural Resources ("WDNR") has determined that the historic fill material brought onto or existing at the property in the past does not qualify as exempt under s. NR 500.08, Wis. Adm. Code. If anyone proposes to do any future construction work on the Property, that person would need to obtain approval for that work from the WDNR under s. NR 506.085, Wis. Adm. Code, prior to initiating any construction on the Property;

Whereas, the Property with soil contamination that exceeds site-specific and/or generic residual contaminant levels ("RCLs") under ch. NR 720, Wis. Adm. Code, and groundwater contamination that exceeds a groundwater quality enforcement standard under ch. NR 140, Wis. Adm. Code, will be included on the WDNR's Geographical Information System data base ("the GIS Registry") pursuant to s. 292.12(3), Wis. Stats. **Axletech International Inc** has submitted to the WDNR all the information necessary to be included on the GIS Registry pursuant to s. NR 726.05(2)(a)3. and s. NR 726.05(3)(a)4., Wis. Adm. Code;

Whereas, on November 15, 2010, the WDNR issued a case closure letter for the Property (Attachment C). The owner of this Property shall adhere to, abide by, and maintain the continuing obligation and other requirements that are specified in the attached state case closure letter and cap maintenance plans; The WDNR requires maintenance of a cover or barrier in order to prevent direct contact with and infiltration through residual soil contamination that might otherwise pose a threat to public health and the environment. The closure letter requires that if soil with residual contamination is excavated in the future, the Property owner at the time of excavation must manage the soil in accordance with applicable federal and state laws. The closure letter also requires that the site be used for an industrial land use due to residual soil contamination.

Whereas, on November 15, 2010, **the** WDNR determined that response actions necessary to restore the environment were completed, except with respect to groundwater contaminated with **petroleum-related compounds, metals, and a vegetable-based quench oil** above the ch. NR 140, Wis. Adm. Code, groundwater quality enforcement standards. The WDNR has determined that this groundwater contamination will be brought into compliance through natural attenuation, in accordance with administrative rules promulgated by the WDNR.

Whereas, the WDNR has determined that the response action is complete and was based on the Property being used as an industrial and/or commercial facility. The response action is complete with regard to protection from residual soil contamination that may pose a human health threat through direct contact In the event that the cover or barrier areas that currently exist are removed, the replacement barrier must be equally protective. Because of the residual contamination and certain continuing obligations for this site, before use of this site can be changed to residential use, or use by certain sensitive populations, such as a day care center, school, a senior center, hospital or a similar use, notification of the Department is required. Additional sampling and/or cleanup may be required to determine if it is protective based on future land uses;

Whereas, if the requirements of this Certificate, the case closure letter or the cap maintenance plans are not followed, or if the land use changes, the WDNR may take actions under ss. 292.11 or 292.12, Wis. Stats., to ensure compliance with the specified requirements, and the person who owns or controls the Property may no longer qualify for the liability protections under s. 292.15, Wis. Stats.; and

Whereas, Axletech International Inc has paid to WDNR the appropriate insurance fee and has submitted a complete insurance application form to obtain coverage for the Property under the state's master insurance contract in accordance with s. 292.15(2)(ae)3m., Wis. Stats., and ch. NR 754, Wis. Adm. Code, based on their desire to use natural attenuation to remediate groundwater contamination that exceeds ch. NR 140, Wis. Adm. Code, groundwater quality enforcement standards;

Therefore, based upon the information that has been submitted, the WDNR hereby certifies that the response actions set forth in the WDNR approved remedial action plan for the Property and any other necessary response actions have been completed, except with respect to **petroleum-related compounds, metals, and a vegetable-based quench oil** contaminated groundwater above ch. NR 140, Wis. Adm. Code, enforcement standards that WDNR has determined will be brought into compliance through natural attenuation, in accordance with rules promulgated by WDNR.

Upon issuance of this Certificate, **Axletech International Inc** and the persons qualified for protection under s. 292.15(3), Wis. Stats., are exempt from the provisions of ss. 289.05(1), (2), (3) and (4), 289.42(1), 289.67, 291.25(1) to (5), 291.29, 291.37, 292.11(3), (4), and (7)(b) and (c) and 292.31(8), Wis. Stats., with respect to the existence of hazardous substances on or originating from the Property, the release of which occurred prior to the date the WDNR approved the environmental investigation required under s. 292.15(2)(ae)1., Wis. Stats. However, the person who owns or controls the Property would no longer qualify for this liability exemption if that person fails to maintain or monitor the Property as required by the conditions in this Certificate, the November 15, 2010 case closure letter, s. 292.12, Wis. Stats., and administrative rules promulgated by the WDNR. Any discharges of a hazardous substance to or from the Property that occur after the date that the environmental investigation was approved will be the responsibility of the current Property owner and any other person who possesses or controls that discharge and any person who caused the discharge.

If natural attenuation of contaminated groundwater fails, the insurance coverage under s. 292.15(2)(ae)3m., Wis. Stats., may be used to cover the costs of complying with s. 292.11(2), Wis. Stats., with respect to groundwater quality.

The protection from liability provided under s. 292.15(2), Wis. Stats., does not apply to any person who has obtained a Certificate of Completion by fraud or misrepresentation, or by knowingly failing to disclose material information or under circumstances in which **Axletech International Inc** knew or should have known about more discharges of hazardous substances than was revealed by the investigation approved by the WDNR.

Nothing in this Certificate or in s. 292.15, Wis. Stats., affects the authority of the WDNR to exercise any powers or duties under applicable laws other than ss. 289.05(1), (2), (3) and (4), 289.42(1), 289.67, 291.25(1) to (5), 291.29, 291.37, 292.11(3), (4), and (7)(b) and (c) and 292.31(8), Wis. Stats., with respect to any release or threatened release of contaminants at the Property, or the right of the WDNR to seek relief available against any person who is not entitled to protection from liability under s. 292.15, Wis. Stats., with respect to such release or threatened release.

SIGNED AND CERTIFIED this 16th day of December, 2010.

Matthew Frank, Secretary
Wisconsin Department of Natural Resources

ATTACHMENT A
LEGAL DESCRIPTION
Axletech International Inc

See attached Warranty Deed Doc. # 1224631 recorded with Winnebago County Register of Deeds Office on January 14, 2003.

FILE COPY

Document Number

STATE BAR OF WISCONSIN FORM 2 - 1999
WARRANTY DEED

1224631

REGISTER'S OFFICE
WINNEBAGO COUNTY, WI
RECORDED ON

01/14/2003 10:44AM

SUSAN WINNINGHOFF
REGISTER OF DEEDS

RECORDING FEE 13.00
TRANSFER FEE 15000.00
OF PAGES 2

This Deed, made between MERITOR HEAVY VEHICLE SYSTEMS, LLC, a Delaware limited liability company, having an address at 2135 West Maple Road, Troy, Michigan 48084-7186, Grantor, and AXLETECH INTERNATIONAL, INC., a Delaware corporation having an address at 2135 West Maple Road, Troy, Michigan 48084, Grantee.

Grantor, for a valuable consideration, conveys to Grantee the following described real estate in Winnebago County, State of Wisconsin (if more space is needed, please attach addendum):

SEE ADDENDUM "A" ATTACHED HERETO AND MADE A PART HEREOF

Recording Area

Name and Return Address
Axletech International, Inc.
2135 West Maple Road
Troy, Michigan 48084

Exceptions to warranties: None

05-761-0000
Parcel Identification Number (PIN)
This is not homestead property.

Dated this _____ day of _____, 2002.

MERITOR HEAVY VEHICLE SYSTEMS, LLC

By: _____
Juan L. De La Riva
Its: Senior Vice President

THIS INSTRUMENT WAS DRAFTED BY

L. Jeffrey Zauberman
Miller, Canfield, Paddock and Stone, PLC
150 W. Jefferson Avenue, Suite 2500
Detroit, MI 48226

(313) 496-7509

ACKNOWLEDGEMENT

STATE OF Michigan)
) ss.
Wayne County)

Personally came before me this 20th day of December, 2002 the above named Juan L. De La Riva to me known to be the person who executed the foregoing instrument and acknowledged the same.

JEFFREY L LABINE
Notary Public, Wayne Co., MI
My Comm. Expires Jan. 15, 2005

Notary Public, State of Michigan
My Commission is permanent. (If not, state expiration date: January 15, 2005.)

*Names of persons signing in any capacity must be typed or printed below their signature.

ADDENDUM "A" – LEGAL DESCRIPTION

rcel No. 1:

Lots 7 and 15 and that part of Lots 22 and 23 lying Westerly or Southwesterly of the Right of Way of the Chicago and Northwestern Railway, and on which the main track of said Railway Company, through aforementioned Lots, is locate and part of Lots 16 and 17, all in Assessor's Plat (Axle) Fifth Ward, City of Oshkosh, Winnebago County, Wisconsin. excepting therefrom rail road rights of way, as now located.

Parcel No. 2

Lots 14, 18, 19 and 24, all in Assessor's Plat (Axle), Fifth Ward, City of Oshkosh, excepting therefrom rail road rights way, as now occupied.

Parcel No. 3:

That Part of Lots 16, 17 and 23 all in Assessor's Plat (Axle), Fifth Ward, City of Oshkosh, described as follows: VIZ.:

Commencing on the Northerly or Northwesterly Line of New Street (later known as Forest Avenue), as per Leach's M of 1894, at the point of intersection with the Westerly line of the right of way of the Chicago and Northwestern Railwa Company, and on which the main track of said railway company through aforementioned Lots is located, thence Northwesterly along the Westerly line of said Right of Way to point of intersection with the extended most Northwesterly line of Property owned and occupied by the Timken-Detroit Axle Company, and more particularly described in Deed recorded in Winnebago County Registry, in Volume 450 of Deeds on pages 278 to 281 inclusive, nce Northeasterly to the most Westerly corner of property of the Timken-Detroit Axle Company, as aforementioned nce Northeasterly 83 feet to an iron corner thence Southeasterly 22 feet to an iron corner, thence Northeasterly 51.7 feet to an iron corner, thence Southeasterly 62.1 feet to an iron corner, thence Northeasterly 130 feet to a point on the Westerly or Southwesterly line of High Street, 387.5 feet Northwesterly of the point of intersection of said Westerly lin of High Street with the Northerly line of aforementioned New Street (last 5 directions constituting the division line between lands occupied by the Timken-Detroit Axle Company, and claimed by virtue of Deeds recorded in Winnebago County Registry, in Volume 450 on pages 278 to 281 inclusive, and in Volume 501 on pages 209 and 210), thence Southeasterly along the Westerly line of High Street, 387.5 feet to point of intersection with the Northerly line of aforementioned New Street, thence Southwesterly along the Northerly line of the aforementioned New Street, to the place of beginning, excepting therefrom rail road rights of way, as now occupied.

Parcel No. 4:

All that tract of parcel of land being Lot Twenty-two (22) in the Assessor's Plat (Axle) Fifth Ward, City of Oshkosh, County of Winnebago, State of Wisconsin, less and except the following described tract of land:

Commencing at the Southeasterly (most Easterly) corner of Lot Twenty-one (21) in said Plat; thence Southwesterly, at right angles to the Northeasterly line of said Lot Twenty-one (21) to the Northeasterly Bank of the Fox River; thence Northwesterly, along the Northeasterly bank of said river, to the Northerly line of said Lot Twenty-two (22) (said line being the Southerly line of said Lot Twenty-one (21); thence Easterly, along the Northerly line of said Lot Twenty-two (22), to the place of beginning.

ATTACHMENT B
INVESTIGATION AND REMEDIAL ACTION PLAN REPORTS
Axletech International Inc

1. Phase II Environmental Site Assessment, February 2, 2001, Arcadis.
2. Phase I Environmental Site Assessment, December 2001, Arcadis.
3. Phase II Environmental Property Assessment Report, February 21, 2002, Arcadis.
4. Workplan for Supplemental Investigation and Remediation Activities, November 7, 2003, Arcadis.
5. Supplemental Site Investigation and Remediation Progress Report, June 2005, Arcadis.
6. Supplemental Site Investigation and Remediation Progress Report, January 31, 2007, Arcadis.
7. March 27, 2007 letter from WDNR approving site investigation and remediation recommendations.
8. Project Status Meeting, June 2009, Arcadis.
9. Summary of Supplemental Investigation Activities, October 30, 2009, Arcadis.
10. LNAPL Mobility Assessment, April 2010, Arcadis.
11. Closure Package submittals for each of the RECs, 2009-2010, Arcadis.

ATTACHMENT C
Closure Letter and Cap Maintenance Plan
Axletech International Inc.

See Attached November 15, 2010, Case Closure Letter and cap maintenance plan for the **Axletech International Inc.** site.

State of Wisconsin \ DEPARTMENT OF NATURAL RESOURCES

Jim Doyle, Governor
Matthew J. Frank, Secretary
Ronald W. Kazmierczak, Regional Director

Northeast Region Headquarters
2984 Shawano Ave,
Green Bay, WI 54313-6727
FAX 929-662-5413
TTY Access via Relay 711

November 15, 2010

DAVID O'CONNOR
MERITOR HEAVY VEHICLE LLC
2135 WEST MAPLE ROAD
TROY MI 48084

SUBJECT: Final Case Closure with Continuing Obligations
Meritor Heavy Vehicle (aka Axletech), 1005 High Avenue, Oshkosh, WI
VPLE #06-71-517594

Dear Mr. O'Connor:

The purpose of this letter is to summarize the closure of 18 identified Recognized Environmental Conditions (RECs) on this site and plan for the final Certificate of Completion. The Department considers this site closed and no further investigation or remediation is required at this time.

The Northeast Region Closure Committee reviewed the initial Requests for Closure on November 12, 2009. The Closure Committee reviews environmental remediation cases for compliance with state laws and standards to maintain consistency in the closure of these cases. Based on the correspondence and data provided, your case meets the closure requirements in ch. NR 726, Wisconsin Administrative Code. The final closure decision was based on the property being used for heavy industrial manufacturing at the time of closure.

While the Department considers this case closed, you and future property owners must comply with certain continuing obligations as explained in this letter. Because of the residual contamination and certain continuing obligations for this site, before use of this site can be changed to a residential, commercial, agricultural or other non-industrial use, notification of the Department is required, and additional investigation and/or cleanup may be required. You also need to pass this information about these continuing obligations on to anyone who purchases this property from you (i.e. pass on this letter).

Background and Summary

In 2003 Meritor (former Axletech) entered the Wisconsin Voluntary Party Exemption Program (VPLE) in order to fully assess the various areas of recognized environmental concern (RECs) on the property. A total of 18 RECs were investigated, evaluated, and remediated as necessary.

The entire Meritor property was developed on historic soil fill that contains concentrations of arsenic, lead, cadmium, and Polycyclic Aromatic Hydrocarbons (PAHs) that are higher than standard background levels. Current and future property owners and managers should be aware that the "Site-wide Materials Handling & Cap Maintenance Plan" must be followed when any excavation or construction work is planned at the property. This factor was taken into account when evaluating each REC for closure. Please refer to the attached Maintenance Plan for details.

The following is a summary of the RECs and their associated closure requirements [*Note: Benzo(a)Pyrene equivalents were calculated and used for determining risk and cap requirements*]:

- REC 17 – Site-wide Fill (BRRTS # 02-71-553456) → Several metals and PAHs are present across the property in excess of non-industrial and industrial soil standards. Therefore, Industrial Land Use is to be maintained at the entire property, in addition to several areas requiring cap maintenance because the concentrations exceed industrial levels of the site specific calculated Benzo(a)Pyrene equivalents.
- REC 1 – Heat Treat Tunnel (#02-71-379727) & REC 3A – Quench Tanks (#02-71-548684) → vegetable based quench oil removed to the extent practicable; however some does remain in place. Closure with maintenance of an engineered cap for concentrations related to the site-wide fill (REC 17).
- REC 2 – Assembly Area Underground Storage Tanks (UST) (#09-71-543963) → investigated and given "No Action Required" (NAR) status.
- REC 3B – Waste Oil UST (#09-71-415098) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 3C – Exterior Tank Area (#02-71-415152)→ Closure with Industrial Land Use.
- REC 3D – Coolant USTs (#09-71-548685) & REC 5 – VTLs (#09-71-415068)→ investigated and given "No Action Required" (NAR) status.
- REC 3G – Gear Lube USTs (#09-71-544839) → investigated and given "No Action Required" (NAR) status.
- REC 4 – HMCS (#02-71-415060) → investigated and given site specific closure [handle remaining contaminated soils as a solid waste]
- REC 6 – Radial Drill Coolant Pit (#09-71-415078) & REC 15 – Ex-Cell-O VTL (#09-71-415132) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 7 – Paint Booth Area (#09-71-543964) → investigated and given "No Action Required" (NAR) status.
- REC 8 & 10 – Waste Storage Rooms (#09-71-415088) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).
- REC 11 – Coolant Mixing Room (#09-71-544862) → investigated and given "No Action Required" (NAR) status.
- REC 12 – Air Compressor Room (#09-71-415107) → investigated and given "No Action Required" (NAR) status.
- REC 13 – South Broaches Area (#09-71-415114) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based LNAPL presence from REC 1/REC 3A.
- REC 14 – Elevator Pit (#09-71-415125) → investigated and given "No Action Required" (NAR) status.

Industrial Land Use Limitation

Soil and fill samples were taken on areas of the Property in areas not included in the areas covered by the cap maintenance plan that are representative of remaining residual soil contamination on this property that contained PAHs and several other metals in concentrations that exceeded NR 720.11, Table 2, Wis. Adm. Code, non-industrial soil standards and met NR 720.11, Table 2, Wis. Adm. Code, industrial soil standards or in concentrations that meet the site-specific industrial soil standards developed for this site.

Therefore, pursuant to s. NR 726.05(8)(b)1., Wis. Adm. Code, this property may not be used or developed for a residential, commercial, agricultural or other non-industrial use, unless (at the time that the non-industrial use is proposed) the property owner provides notification to the Department of Natural Resources of the change in land use and an investigation is conducted, to determine the degree and extent of the PAH and metal contamination that remains on the property, and remedial action is taken as necessary to meet all applicable non-industrial soil cleanup standards.

Residual Soil Contamination

Residual soils remain on the property containing PAHs and metals. If soil is excavated in the future, then pursuant to ch. NR 718 or, if applicable, ch. 289, Stats., and chs. 500 to 536, the property owner at the time of excavation must sample and analyze the excavated soil to determine if residual contamination remains. If sampling confirms that contamination is present the property owner at the time of excavation will need to determine whether the material is considered solid or hazardous waste and ensure that any storage, treatment or disposal is in compliance with applicable standards and rules. In addition, all current and future owners and occupants of the property need to be aware that excavation of the contaminated soil may pose an inhalation or other direct contact hazard and as a result special precautions may need to be taken to prevent a direct contact health threat to humans.

Residual Groundwater Contamination

Groundwater concentrations of various petroleum-related compounds and metals are greater than enforcement standards set forth in ch. NR140, Wis. Adm. Code. For more detailed information regarding the locations where groundwater samples have been collected (i.e., monitoring well locations) and the associated contaminant concentrations, refer to the Remediation and Redevelopment Program's GIS Registry at the RR Sites Map page at http://dnr.wi.gov/org/aw/rr/gis/index.htm.

DNR fact sheet, RR-819, "Continuing Obligations for Environmental Protection" has been included with this letter, to help explain a property owner's responsibility for continuing obligations on their property. You may obtain additional copies at http://dnr.wi.gov/org/aw/rr/archives/pubs/RR819.pdf.

Final VPLE Invoice

A Final invoice will be sent to you under separate cover when the internal work is completed and hours can be finalized.

Natural Attenuation Insurance

As noted in a previous email to you, the site will require natural attenuation insurance because groundwater contamination at the site exceeds NR 140 Wis. Adm. Code Enforcement Standard Exceedances.

- REC 16 – Oil USTs (#03-71-415143) → Industrial Land Use must be maintained.
- REC 18 – Former Finishing Warehouse (#09-71-553639) → investigated and given "No Action Required" (NAR) status. However, maintenance of an engineered cap required over this area based on concentrations related to the site-wide fill (REC 17).

Continuing Obligations and Public Notice of Residual Contamination (GIS Registry)

While the Department considers this case closed, you and future property owners must comply with certain continuing obligations as explained in this letter.

In lieu of a restriction on your Deed, this site will be listed on the Remediation and Redevelopment Program's GIS Registry. The specific reasons are summarized below:

- Residual soil contamination exists that must be properly managed should it be excavated or removed;
- Before the land use may be changed from industrial to non-industrial, additional environmental assessment work may be necessary;
- Pavement, an engineered cover or a soil barrier must be maintained over contaminated soil and the state must approve any changes to this barrier;
- Groundwater contamination is present above Chapter NR 140 enforcement standards;

This letter and information that was submitted with your closure request application will be included on the GIS Registry. To review the sites on the GIS Registry web page, visit the RR Sites Map page at http://dnr.wi.gov/org/aw/rr/gis/index.htm. If the property is listed on the GIS Registry because of remaining contamination and you intend to construct or reconstruct a well, you will need prior Department approval in accordance with s. NR 812.09(4)(w), Wis. Adm. Code. To obtain approval, Form 3300-254 needs to be completed and submitted to the DNR Drinking and Groundwater program's regional water supply specialist. This form can be obtained on-line http://dnr.wi.gov/org/water/dwg/3300254.pdf or at the web address listed above for the GIS Registry.

Cover or Barrier
Pursuant to s. 292.12(2)(a), Wis. Stats., the pavement, building foundation and asphalt/compacted gravel cover that currently exists in the location shown on the attached map shall be maintained in compliance with the attached maintenance plan in order to prevent direct contact with residual soil contamination that might otherwise pose a threat to human health.

Prohibited Activities
The following activities are prohibited on any portion of the property where pavement, a building foundation, soil cover, engineered cap or other barrier is required as shown on the attached map, unless prior written approval has been obtained from the Wisconsin Department of Natural Resources: 1) removal of the existing barrier; 2) replacement with another barrier; 3) excavating or grading of the land surface; 4) filling on capped or paved areas; 5) plowing for agricultural cultivation; 6) construction or placement of a building or other structure.

Please submit the application for natural attenuation insurance as soon as possible along with the appropriate fee to the attention of our VPLE Coordinator:

Michael Prager, RR/5
State of Wisconsin
Department of Natural Resources
PO Box 7921
Madison WI 53707-7921

The application and fee schedule is included for your convenience and can also be found at the following web pages: http://www.dnr.state.wi.us/org/aw/rr/archives/pubs/4400-224.pdf (Application Form)
http://www.dnr.state.wi.us/org/aw/rr/archives/pubs/RR661.pdf (Fee schedule)

The Department appreciates your efforts to restore the environment at this site. If you have any questions regarding this closure decision or anything outlined in this letter, please contact Kathy Sylvester at (920) 424-0399.

Sincerely,

Roxanne Nelezen Chronert, Acting Team Supervisor
Northeast Region Remediation & Redevelopment Program

Attachments:

- Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers, Prepared by Arcadis, dated 10/14/2010
- Figure 3 Extent of Engineered Barriers with the photographic Locations depicting conditions. Prepared by Arcadis, dated 7/2/2010
  PUB-RR-819 Continuing Obligations for Environmental Protection
- PUB-RR-661 Insurance for VPLE sites using Natural Attenuation
- Form 4400-224 Environmental Insurance Application

e-cc: Case File – OSH
Michael Prager – CO
Gary Kjelleren – General Dynamics (via email: gkjeller@gdatp.com)
w/o attachments: Brian Maillet – Arcadis (via email: bmaillet@arcadis-us.com)

ARCADIS

Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers

Former Meritor Facility
1005 High Avenue
Oshkosh, Wisconsin
BRRTS # 06-71-517594

Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers

This Site-Wide Materials Handling and Cap Maintenance Plan for Engineered Barriers ("Plan") is applicable at the Property known as the Former Meritor Facility (Meritor) located at 1005 High Avenue in the city of Oshkosh, Winnebago County, Wisconsin ("Property"), and depicted on Figures 1 and 2. AxleTech International, Inc. (AxleTech) is currently continuing axle manufacturing operations at the Property. AxleTech is currently owned by General Dynamics Armament and Technical Products, Inc. (General Dynamics).

A copy of this Plan shall at all times be kept on file in the offices of: (1) the Wisconsin Department of Natural Resources (WDNR), Northeast Region; (2) the owner of the Property, currently General Dynamics, its successors and assigns (hereinafter identified collectively as the "Owner"); and (3) the Property manager, currently AxleTech (hereinafter identified collectively as the "Property manager"). The Plan shall be made available by the Property manager to contractors, utilities and maintenance personnel, and any other public or private persons or entities authorized to perform excavation work at the Property.

The purpose of this Plan is to describe the procedures and controls that shall be followed to properly manage (1) all unsaturated soils at the Property; (2) Cap elements that are protective of direct contact exposure with unsaturated soils and light non-aqueous phase liquid (LNAPL); (3) Cap elements that mitigate LNAPL migration, and (4) the existing subsurface setting that contains the natural redox gradient between Recognized Environmental Condition (REC) 17 and the Fox River. Unsaturated Soils are hereby defined as the full depth of soils, extending from the ground surface to the water table, which ranges from approximately 2 to 5 feet below ground surface (ft bgs). LNAPL is hereby defined as quench mineral oil that is a primary eye irritant and may be a skin irritant (see attached Material Safety Data Sheet) and has been identified in the subsurface soil vadose zone (approximately 4 to 6 ft bgs) at REC 1- Heat Treating Area, REC 3A- Former Quench Oil Underground Storage Tanks (USTs), and REC 13- Broaches Area.

The Cap elements protective of direct contact exposure are approved engineered barriers which may consist of the facility concrete flooring and foundation, the asphalt and gravel parking lots placed over the unsaturated soils, and any future concrete flooring or foundations, and asphalt or gravel parking surfaces placed over the unsaturated soils . The Cap elements that mitigate LNAPL migration are engineered barriers which consist of the current facility concrete flooring and foundation or any

future flooring, foundation, or pavement. It is understood that the current industrial zoning of the Property is a Cap element. The maintaining of the industrial setting is an administrative requirement of this Plan. The extents of the engineered barriers at the Property are shown on attached Figure 3.

The engineered barriers will be maintained in accordance with the Plan. Maintaining the function of the engineered barriers will continue to limit direct contact exposure with unsaturated soils and LNAPL that may be encountered during construction and maintenance activities at the Property. The engineered barriers will also mitigate LNAPL migration.

The WDNR and its successor and assigns (hereinafter identified collectively as the "Department") shall be notified of any activity that is not in accordance with this Plan.

Allowed Activities

The following allowed activities must comply with all listed requirements:

A1. Construction or Installation of Buildings, Structures or Other Improvements. Buildings, structures or other improvements may be constructed or installed on the Property using footings or other foundations that are placed into the unsaturated soils in the following manner:

A) The contractor performing the work shall be provided a copy of this Plan by the Property manager and shall prepare a health and safety plan, appropriate to the work being performed.

B) All materials used in the pavement or foundation shall not contain any hazardous waste. Unsaturated soils or granular layer materials that are excavated shall be separated and segregated to the extent practicable so that they may be replaced upon completion of the work following proper analytical testing of the soils in accordance with applicable solid waste regulations. Any such excavation of unsaturated soils or granular layer materials shall be conducted in accordance with the health and safety plan. All excavated unsaturated soils shall be, at a minimum, placed onto plastic sheeting and covered, or placed into a watertight container such as a covered roll-off box.

C) Upon completion of the work, previously excavated unsaturated soils and granular layer materials may be backfilled, provided, however, that the unsaturated soils are not classified as a solid or hazardous waste and the backfilled unsaturated soils maintain the compaction characteristics of the surrounding unsaturated soils. The unsaturated soils or granular layered material, as well as any additional clean soil or granular fill material necessary to backfill to grade, shall be backfilled in such a manner as to maintain the original depth of the unsaturated soils or granular layer material, as the case may be. The following shall be properly characterized and managed in accordance with state law with notice to the Department: 1) any previously excavated unsaturated soils; 2) any excavated granular material that has been commingled, mixed or otherwise in contact with unsaturated soils, which is not backfilled; and 3) any groundwater encountered and removed during construction.

D) A memorandum or report shall be prepared describing the work performed, identifying the person(s) performing the work and the date of the work, and confirming that the Plan was adhered to in completion of the work. A copy of the report shall be kept on file by the Property manager, and shall be filed with the Department.

A2. Utility Installations or Repairs. No utility repairs or installation of new or replacement utilities shall be conducted on the Property until after the utility and any contractor(s) for the utility have acknowledged receipt of a copy of this Plan. The utility repairs or installation(s) shall be conducted in strict conformance with the standards set forth below with respect to excavations into and/or beneath the Site, and such excavations are to be undertaken in the following manner:

A) The contractor performing the work shall be provided with a copy of this Plan by the Property manager and shall prepare a health and safety plan, appropriate to the work being performed.

B) Unsaturated soils or granular layer materials that are excavated, all for purposes of utility installation or repair, shall be separated and segregated to the extent practicable so that they may be replaced upon completion of the work following proper analytical testing of the soils in accordance with applicable solid waste regulations. All excavated unsaturated soils shall be, at a minimum, placed onto

plastic sheeting and covered, or placed into a watertight container such as a covered roll-off box.

C) Upon completion of such work, the excavated unsaturated soils may be placed back into the excavation, provided, however, that any excavated unsaturated soils placed back into the excavation are not classified as a solid or hazardous waste and that the soils maintain the compaction characteristics of the surrounding unsaturated soils.

D) Any excavation of unsaturated soils shall be conducted in accordance with the health and safety plan. Any such soils excavated from beneath the unsaturated soils shall be segregated, properly characterized and managed in accordance with state law with notice to the Department. Any other soils which have been commingled, mixed or otherwise have come into contact with soils excavated from beneath unsaturated soils shall be properly characterized and managed in accordance with state law with notice to the Department. Any soils which have been commingled, mixed or otherwise have come into contact with soils excavated from beneath 4 ft bgs at RECs 1, 3A, and 13 and may contain LNAPL shall be properly characterized and managed in accordance with state law with notice to the Department. Any groundwater affected by such activities shall be managed in accordance with state law after notice to the Department.

E) Clean fill used in connection with utility installation or construction shall not include any granular or porous material, but may include low strength flowable fill or other fill with low hydraulic conductivity.

F) If the utility installation or construction involves any disturbance of the seals used to seal the entrance of utility lines and the structures, such seals shall be replaced with new seals of like or superior quality.

G) A memorandum report shall be prepared describing the work performed, identifying the person(s) performing the work and the date of the work, and confirming that the Plan was adhered to in completion of the work. A copy of the report shall be kept on file with the utility, the Property manager, and shall be filed with the Department.

A3. Offsite Disposal of Excavated Soils. If it becomes necessary or desirable to dispose of excavated soils from the allowed construction, repair, and installation

activities, the excavation and resulting soils shall be managed in accordance with s. NR 718.13, Wis. Adm. Code.

Required Activities

R1. **Annual Cap Inspections.** Not less than annually, the Property shall be inspected by the Property manager to ensure that the integrity of the Engineered Barriers is maintained. The condition of the Engineered Barriers is important to protecting human health from direct contact with the underlying residually impacted soils. The Engineered Barriers can contain cracks, fissures, and shallow holes from normal usage and weather conditions and still be protective of direct contact. Hereafter, 'significant' cracks, fissures, and holes are defined as conditions which would lead to the compromise of the total cap integrity and/or would allow for humans to inadvertently contact the residual impacted soil beneath the Engineered Barriers. Any disturbances of the Engineered Barriers or significant fissures or cracks in the asphalt, gravel, or concrete caps shall be noted. The Engineered Barriers to be inspected are shown on Figure 3.

An engineered barrier inspection form shall be completed by the Property manager which identifies the date of the inspection, the individuals conducting the inspection; any observed disturbances of the Engineered Barriers and any significant fissures or cracks in the asphalt or concrete caps. A copy of the engineered barrier inspection form is attached. All inspection forms shall be maintained on file by the Property manager for a period of 3 years.

R2. **Repairs to Capped Areas.** If, during the annual inspections or other routine inspections of the Property, the Engineered Barriers (see Figure 3) are observed to have been disturbed or significant fissures, cracks or erosional features are observed in the asphalt, gravel, or concrete caps, the Property manager shall arrange to have repairs made to such areas, in a manner consistent with section A1 of this Plan. Such repairs shall be carried out within a reasonable period of time subject to weather and seasonal considerations. All repairs shall be documented on the attached work order form, which will be maintained on file by the Property manager.

R3. **Maintaining the Natural Redox Gradient.** The existing subsurface setting located between the Engineered Barrier for REC 17 and the Fox River shall be maintained to ensure the existing natural redox gradient continues to precipitate dissolved barium from groundwater to regulatory levels that are acceptable to

the WDNR. Repairs and maintenance of the surface grade, including the existing jogging trail, are acceptable under this Plan.

Request for Deviations

The Property manager and Owner shall not conduct any activities at Property that are not in compliance with this Plan, unless written approval to do so is obtained from the Department.

FILE COPY

Document Number

STATE BAR OF WISCONSIN FORM 2 - 1999
WARRANTY DEED

1224631

REGISTER'S OFFICE
WINNEBAGO COUNTY, WI
RECORDED ON

01/14/2003 10:44AM

SUSAN WINNINGHOFF
REGISTER OF DEEDS

RECORDING FEE 13.00
TRANSFER FEE 15000.00
OF PAGES 2

This Deed, made between MERITOR HEAVY VEHICLE SYSTEMS, LLC, a Delaware limited liability company, having an address at 2135 West Maple Road, Troy, Michigan 48084-7186, Grantor, and AXLETECH INTERNATIONAL, INC., a Delaware corporation having an address at 2135 West Maple Road, Troy, Michigan 48084, Grantee.

Grantor, for a valuable consideration, conveys to Grantee the following described real estate in Winnebago County, State of Wisconsin (if more space is needed, please attach addendum):

SEE ADDENDUM "A" ATTACHED HERETO AND MADE A PART HEREOF

Recording Area

Name and Return Address
Axletech International, Inc.
2135 West Maple Road
Troy, Michigan 48084

Exceptions to warranties: None

05-761-0000
Parcel Identification Number (PIN)
This is not homestead property.

Dated this _____ day of _____, 2002.

MERITOR HEAVY VEHICLE SYSTEMS, LLC

By: _____
Juan L. De La Riva
Its: Senior Vice President

THIS INSTRUMENT WAS DRAFTED BY

L. Jeffrey Zaubeman
Miller, Canfield, Paddock and Stone, PLC
150 W. Jefferson Avenue, Suite 2500
Detroit, MI 48226

(313) 496-7509

ACKNOWLEDGEMENT

STATE OF Michigan)
) ss.
Wayne County)

Personally came before me this 20th day of December, 2002 the above named Juan L. De La Riva to me known to be the person who executed the foregoing instrument and acknowledged the same.

JEFFREY L LADINE
Notary Public, Wayne Co., MI
My Comm. Expires Jan. 15, 2005

Notary Public, State of Michigan
My Commission is permanent. (If not, state expiration date: January 15, 2005.)

*Names of persons signing in any capacity must be typed or printed below their signature.

ADDENDUM "A" - LEGAL DESCRIPTION

rcel No. 1:

Lots 7 and 15 and that part of Lots 22 and 23 lying Westerly or Southwesterly of the Right of Way of the Chicago and Northwestern Railway, and on which the main track of said Railway Company, through aforementioned Lots, is locate and part of Lots 16 and 17, all in Assessor's Plat (Axle) Fifth Ward, City of Oshkosh, Winnebago County, Wisconsin, excepting therefrom rail road rights of way, as now located.

Parcel No. 2

Lots 14, 18, 19 and 24, all in Assessor's Plat (Axle), Fifth Ward, City of Oshkosh, excepting therefrom rail road rights way, as now occupied.

Parcel No. 3:

That Part of Lots 16, 17 and 23 all in Assessor's Plat (Axle), Fifth Ward, City of Oshkosh, described as follows: VIZ.:

Commencing on the Northerly or Northwesterly Line of New Street (later known as Forest Avenue), as per Leach's Ma of 1894, at the point of intersection with the Westerly line of the right of way of the Chicago and Northwestern Railway Company, and on which the main track of said railway company through aforementioned Lots is located, thence Northwesterly along the Westerly line of said Right of Way to point of intersection with the extended most Northwesterly line of Property owned and occupied by the Timken-Detroit Axle Company, and more particularly described in Deed recorded in Winnebago County Registry, in Volume 450 of Deeds on pages 278 to 281 inclusive, nce Northeasterly to the most Westerly corner of property of the Timken-Detroit Axle Company, as aforementioned nce Northeasterly 83 feet to an iron corner thence Southeasterly 22 feet to an iron corner, thence Northeasterly 51.7 feet to an iron corner, thence Southeasterly 62.1 feet to an iron corner, thence Northeasterly 130 feet to a point on the Westerly or Southwesterly line of High Street, 387.5 feet Northwesterly of the point of intersection of said Westerly lin of High Street with the Northerly line of aforementioned New Street (last 5 directions constituting the division line between lands occupied by the Timken-Detroit Axle Company, and claimed by virtue of Deeds recorded in Winnebago County Registry, in Volume 450 on pages 278 to 281 inclusive, and in Volume 501 on pages 209 and 210), thence Southeasterly along the Westerly line of High Street, 387.5 feet to point of intersection with the Northerly line of aforementioned New Street, thence Southwesterly along the Northerly line of the aforementioned New Street, to the place of beginning, excepting therefrom rail road rights of way, as now occupied.

Parcel No. 4:

All that tract of parcel of land being Lot Twenty-two (22) in the Assessor's Plat (Axle) Fifth Ward, City of Oshkosh, County of Winnebago, State of Wisconsin, less and except the following described tract of land:

Commencing at the Southeasterly (most Easterly) corner of Lot Twenty-one (21) in said Plat; thence Southwesterly, at right angles to the Northeasterly line of said Lot Twenty-one (21) to the Northeasterly Bank of the Fox River; thence Northwesterly, along the Northeasterly bank of said river, to the Northerly line of said Lot Twenty-two (22) (said line being the Southerly line of said Lot Twenty-one (21); thence Easterly, along the Northerly line of said Lot Twenty-two (22), to the place of beginning.

ALTA SURVEY

SHEET 1 OF 2

SITUATED ALONG HIGH AVENUE, THAT PART OF LOTS 7, 14, 15, 16, 17, 18, 19, 22, 23 AND 24 IN ASSESSOR'S PLAT (AXLE), IN THE FIFTH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN, BOUNDED AND DESCRIBED AS FOLLOWS:

BEGINNING AT THE N.E. CORNER OF SAID LOT 19; THENCE SOUTH 60°58'41" WEST ALONG THE SOUTH LINES OF SAID LOTS 19 AND 24 AFORESAID 736.24 FT.; THENCE NORTH 29°34'30" WEST ALONG A MEANDER LINE RUNNING ALONG THE EASTERLY BANK OF THE FOX RIVER 3157.87 FT.; THENCE NORTH 59°26'25" EAST 332.93 FT.; THENCE NORTH 31°23'55" WEST 275.04 FT.; THENCE SOUTH 89°56'54" EAST ALONG THE SOUTH LINE OF WEST NEW YORK AVENUE 19.00 FT.; THENCE SOUTH 31°01'11" EAST ALONG THE WEST LINES OF LOTS 1 THROUGH 9 IN SAID PLAT 518.26 FT.; THENCE NORTH 60°59'53" EAST ALONG THE NORTH LINE OF LOT 7 IN SAID PLAT 256.79 FT.; THENCE SOUTH 28°52'19" EAST ALONG THE SOUTHWESTERLY LINE OF HIGH AVENUE 66.50 FT.; THENCE SOUTH 60°59'53" WEST ALONG THE SOUTH LINE OF SAID LOT 7 AFORESAID 254.30 FT.; THENCE SOUTH 31°01'11" EAST ALONG THE WESTERLY LINE 50 F. SAID LOTS 8 THROUGH 13 AFORESAID 361.31 FT.; THENCE NORTH 60°59'53" EAST ALONG THE NORTH LINE OF SAID LOT 14 AFORESAID 240.76 FT.; THENCE SOUTH 28°52'19" EAST ALONG THE WESTERLY LINE OF HIGH AVENUE 1404.79 FT. TO THE POINT OF BEGINNING. SAID PARCEL CONTAINS 29.1245 ACRES TO THE DESCRIBED MEANDER LINE (31.6 ACRES MORE OR LESS TO THE WESTERLY BANK OF THE FOX RIVER).

JULY 01, 2002 — SURVEY FOR MEISTER, INC. — NO. 3328
11-13-02 — REVISIONS PER ALTHEIMER AND GRAY

TO JULIE ANN INTERNATIONAL, INC.
STEWART TITLE GUARANTY COMPANY
LA SALLE BANKERS CREDIT, INC.
MEISTER HEAVY VEHICLE SYSTEMS, LLC

THIS IS TO CERTIFY THAT THIS MAP OR PLAT AND THE SURVEY ON WHICH IT IS BASED WERE MADE IN ACCORDANCE WITH THE "MINIMUM STANDARD DETAIL REQUIREMENTS FOR ALTA/ACSM LAND TITLE SURVEYS," JOINTLY ESTABLISHED AND ADOPTED BY ALTA AND NSPS IN 1997, PURSUANT TO THE ACCURACY STANDARDS (AS ADOPTED BY ALTA AND NSPS AND IN EFFECT ON THE DATE OF THIS CERTIFICATION) OF AN URBAN SURVEY, ADOPTED BY THE BOARD OF DIRECTORS, NATIONAL CHAPTER OF SURVEYING AND ADOPTED ON APRIL 26, 1997, ADOPTED BY THE AMERICAN LAND TITLE ASSOCIATION ON SEPTEMBER 27, 1997.

DATED _____

OWNER: _____ (SEAL)
SIGNATURE PRINTED — REGISTRATION NUMBER (IF ANY)

ALL DISTANCES ARE MEASURED TO THE NEAREST HUNDREDTH OF A FOOT.

BEARINGS ARE REFERENCED TO THE SOUTH RIGHT-OF-WAY LINE OF WEST NEW YORK AVENUE, WHICH IS ASSUMED TO BEAR N90°00'00"E.

○ 3/4 INCH DIAMETER IRON ROD, 24 INCHES LONG, WEIGHING NOT LESS THAN 1.5 LBS PER LINEAL FOOT, SET.

● EXISTING 1" IRON PIPE FOUND (UNLESS NOTED).

FIRM MAP INFORMATION
COMMUNITY PANEL NO. 550511 0010 D
PANEL 10 OF 20
REVISED JUNE 02, 1985
LAND IS IN ZONES "X" AND "AE"

UNDERGROUND INFORMATION AS SHOWN WAS OBTAINED FROM MUNICIPAL, UTILITY COMPANY AND/OR DIGGERS HOTLINE RECORDS. THE ACCURACY OF WHICH IS NOT GUARANTEED.

GRAPHIC SCALE
(IN FEET)
1 inch = 50 ft.

VICINITY MAP
(NOT TO SCALE)

WEST NEW YORK AVENUE 60.0 FT.
S89°56'54"E 19.01'
N89°56'54"W 315.58'
N31°23'55"W 275.04'
EASEMENT PER DOC. NO. 1019922
±391' N59°26'25"E 332.93'
±585'
S31°01'11"E 518.26'
N28°52'19"W 364.68'
N60°59'53"E 256.79'
S28°52'19"E 66.50'
S60°59'53"W 254.30'
S31°01'11"E 361.31'
N60°59'53"E 240.76'
FOX RIVER
HIGH AVENUE (RIGHT OF WAY VARIES)
ASSESSOR'S PLAT (AXLE)
VINE AVENUE
APPROXIMATE LOCATION OF A 20 FT. WIDE SEWER EASEMENT PER VOL. 1329, PG. 107 (DTD. 3/26/71)
STORM SEWER EASEMENT PER VOL. 1036, PG. 549
WOODS
FLOOD PLAIN AE ZONE
100 YEAR FLOOD PLANE (LIMIT AS SCALED FROM FIRM MAP)
R-3 MULTIPLE DWELLING DISTRICT
M-2 CENTRAL INDUSTRIAL DISTRICT
LOT 1 LOT 2 LOT 3 LOT 4 LOT 5 LOT 6 LOT 7 LOT 8 LOT 9 LOT 10 LOT 11 LOT 12 LOT 13 LOT 14 LOT 15 LOT 16 LOT 17 LOT 18 LOT 19 LOT 22 LOT 23 LOT 24
EXISTING DRIVE
ASPHALT PARKING LOT
GRAVEL PARKING LOT
CONCRETE PAD
ASPHALT BUILDING
CURTIL
FOX RIVER

- DECIDUOUS TREE
- SANITARY MANHOLE
- STORM MANHOLE
- MISCELLANEOUS MANHOLE
- GUY WIRE
- WATER VALVE
- CATCH BASIN
- LIGHT POLE
- FIRE HYDRANT
- GUARD POST
- SIGN AS NOTED ON SURVEY.
- ROUND INLET
- UTILITY POLE
- GAS VALVE
- MISCELLANEOUS STRUCTURE AS NOTED ON SURVEY.
- CHAIN LINK FENCE
- UNDERGROUND ELECTRIC
- OVERHEAD WIRES
- UNDERGROUND GAS
- UNDERGROUND TELEPHONE
- BUSH

11-13-02 ADDITIONS PER ALTHEIMER AND GRAY
JULY 01, 2002 (ADDED DIMENSIONS FENCES TO LOT LINES)
JUNE 14, 2002
JOB NO. 28284

ROEHLIG
LAND SURVEYING & CONSULTING LTD.
A Division of R.A. Smith and Associates
2250 Universal Street • Oshkosh WI • 54904
(920) 235-2284

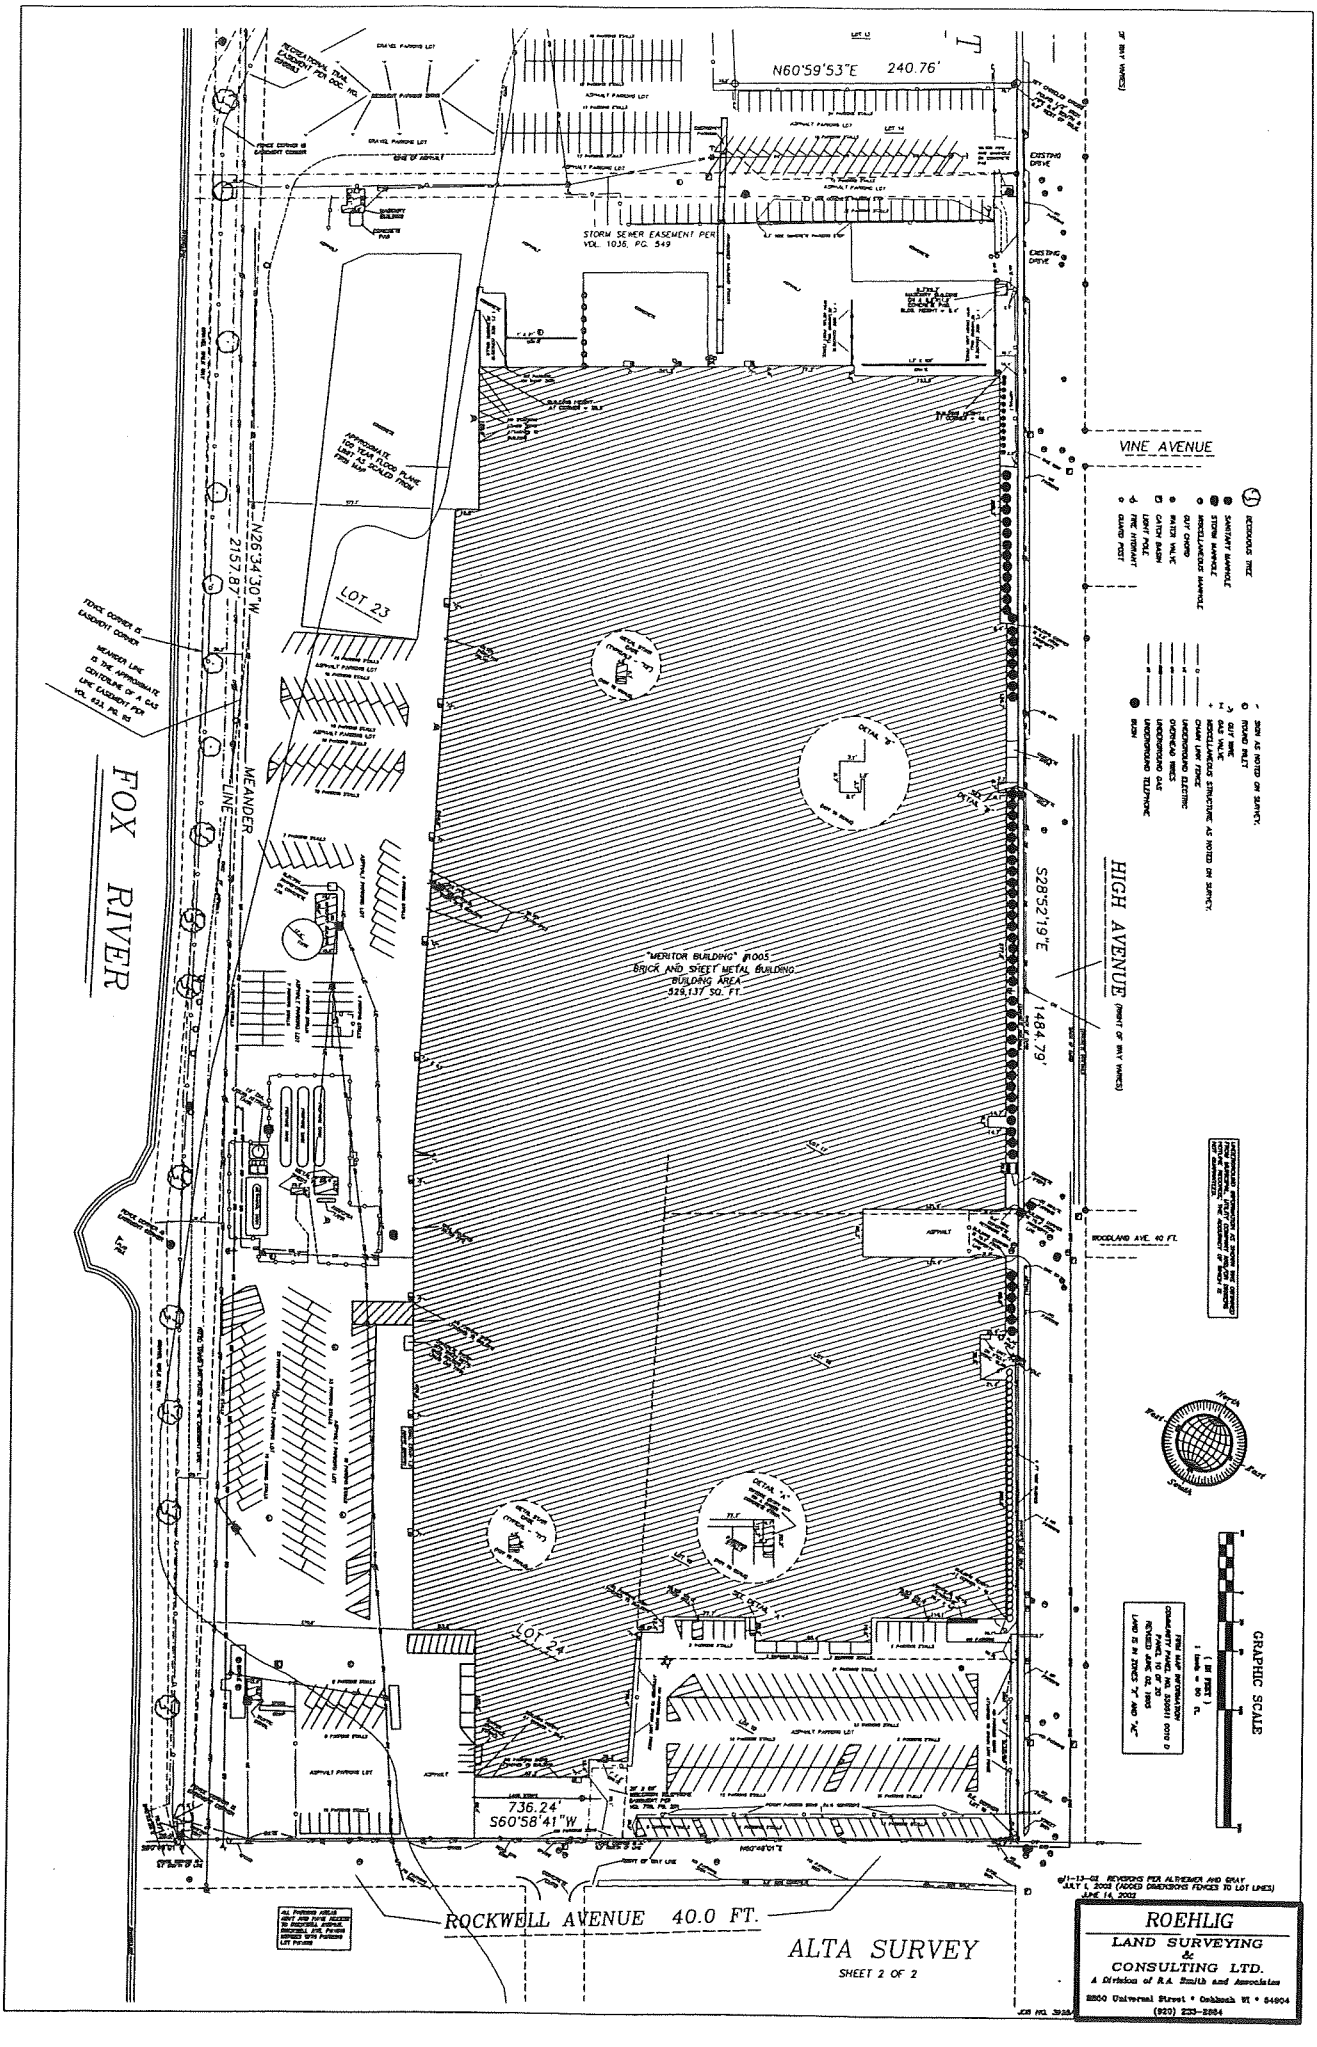
FOX RIVER
VINE AVENUE
HIGH AVENUE
ROCKWELL AVENUE 40.0 FT.
MEANDER LINE
N26°34'30"W 2157.87'
N60°59'53"E 240.76'
S28°52'19"E 1484.79'
S60°58'41"W 736.24'
LOT 23
LOT 24
"MERITOR BUILDING" #0005
BRICK AND SHEET METAL BUILDING
BUILDING AREA
529,137 SQ. FT.
STORM SEWER EASEMENT PER VOL. 1035, PG. 549
WOODLAND AVE. 40 FT.
GRAPHIC SCALE
ALTA SURVEY
SHEET 2 OF 2
ROEHLIG
LAND SURVEYING & CONSULTING LTD.
A Division of R.A. Smith and Associates
2800 Universal Street • Oshkosh WI • 54904
(920) 233-2884

ArvinMeritor™

2135 W. Maple Rd.
Troy, MI 48084

arvinmeritor.com

February 17, 2009

Gary A. Peters
Howard & Howard Attorneys, PLLC
450 West Fourth Street
Royal Oak, Michigan 48067-2557

Mr. Peters:

Re: Responsible Party Statement
1005 High Avenue Oshkosh, Wisconsin

The legal description of the subject property, provided herein as Addendum A to the Warranty Deed (Winnebago County, Wisconsin Register of Deeds Document No. 1224631 recorded January 14, 2003 at 10:44AM), is accurate to the best of my knowledge of the metes and bounds description of the land, which has conditions of impacted soils and groundwater. The land described in said Addendum A is the same as that delineated on the enclosed plat of survey made by Roehlig Land Surveying & Consulting, Ltd. entitled Job 3928A dated November 13, 2002.

Sincerely,

David A. O'Connor
Corporate Environmental Manager
Meritor Heavy Vehicle Systems, LLC Representative

Enclosures

Oshkosh Warranty Deed for Real Estate

Oshkosh Plat of Survey 1 of 2

Oshkosh Plat of Survey 2 of 2

cc: Gary Kjelleren, General Dynamics
Jim Bannantine, ARCADIS
Brian Maillet, ARCADIS

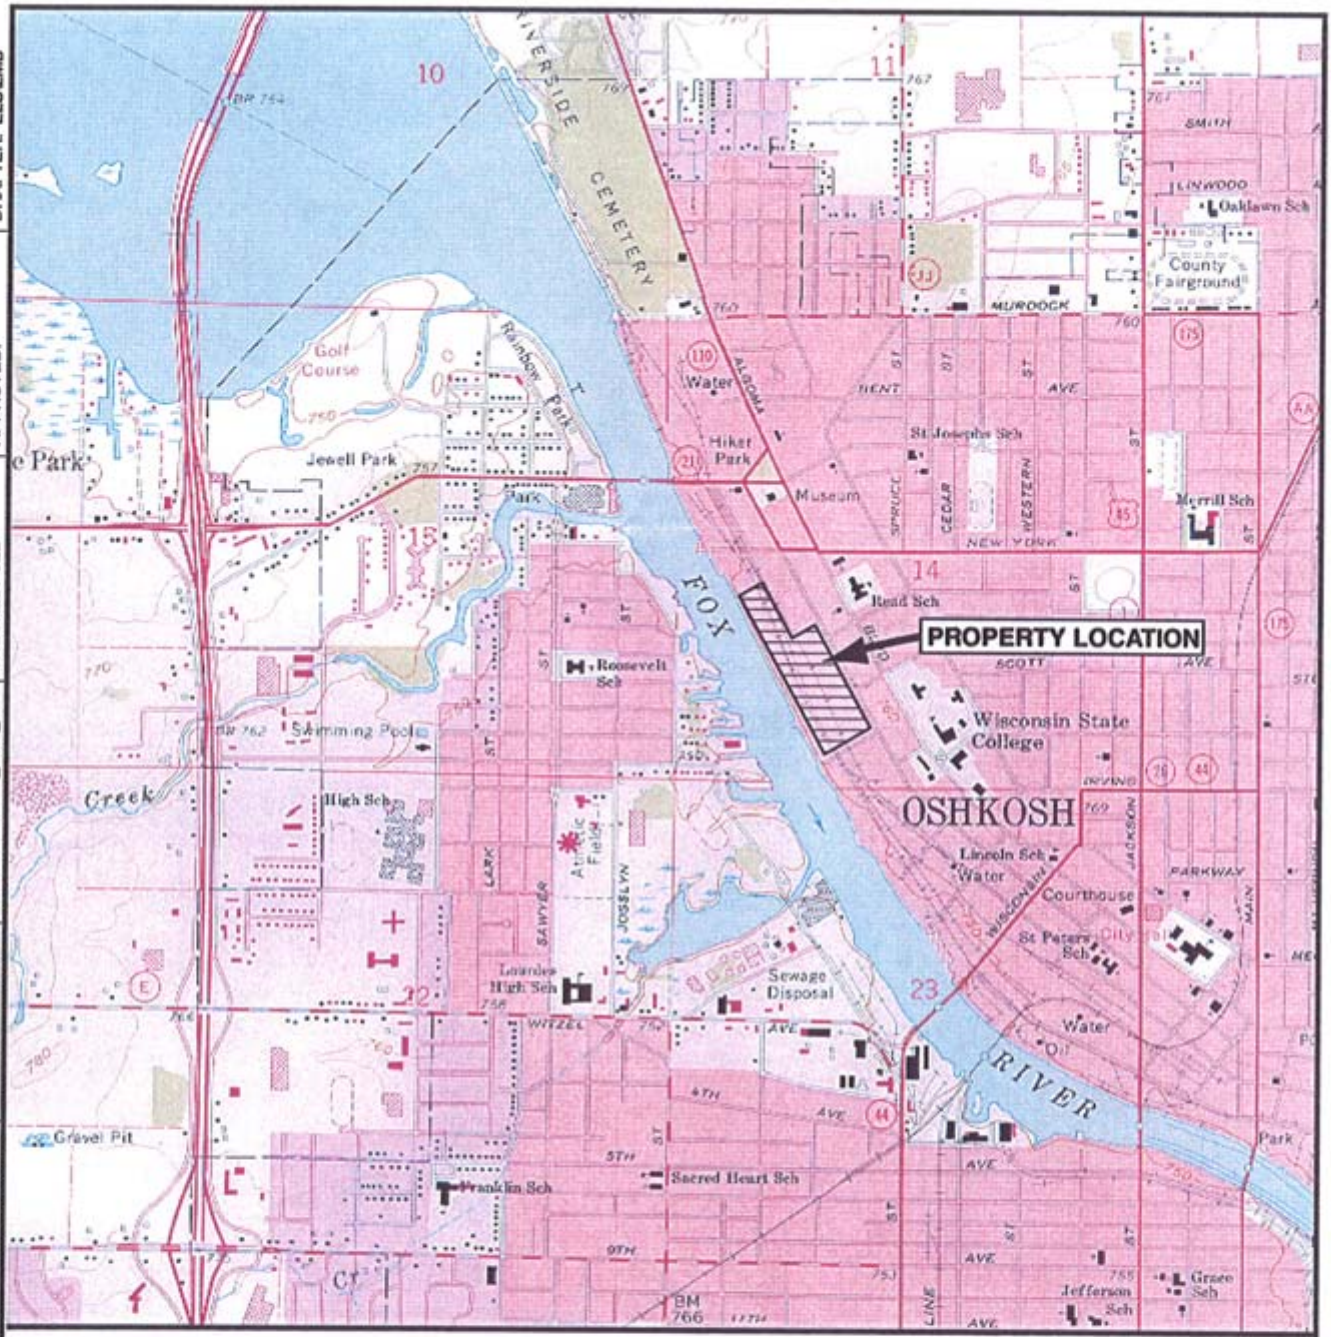

DRAFTER: ELS/LMB | APPROVED: | CHECKED: JEB | DRAWING: SITE_LOC_2.AI | FILE NO.: GRAPHICS | PN: WYNNCHRCH\WI0926\MERITOR-OSHKOSH | DWG DATE: 30JAN09

ARCADIS

PROPERTY LOCATION MAP

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

FIGURE
1

LEGEND

- MONITORING WELL
- PROPERTY BOUNDARY
- RECREATION TRAIL
- GRAVEL/GRASS AREAS
- TREE LINE (WOODED AREA)
- *REC 17 (OPEN)* — RECOGNIZED ENVIRONMENTAL CONDITION WITH REGULATORY STATUS
- *(NFA)* — NO FURTHER ACTION
- —W— WATER LINE
- —SW— STORM SEWER LINE
- —SAN— SANITARY SEWER LINE
- —E— ELECTRIC LINE

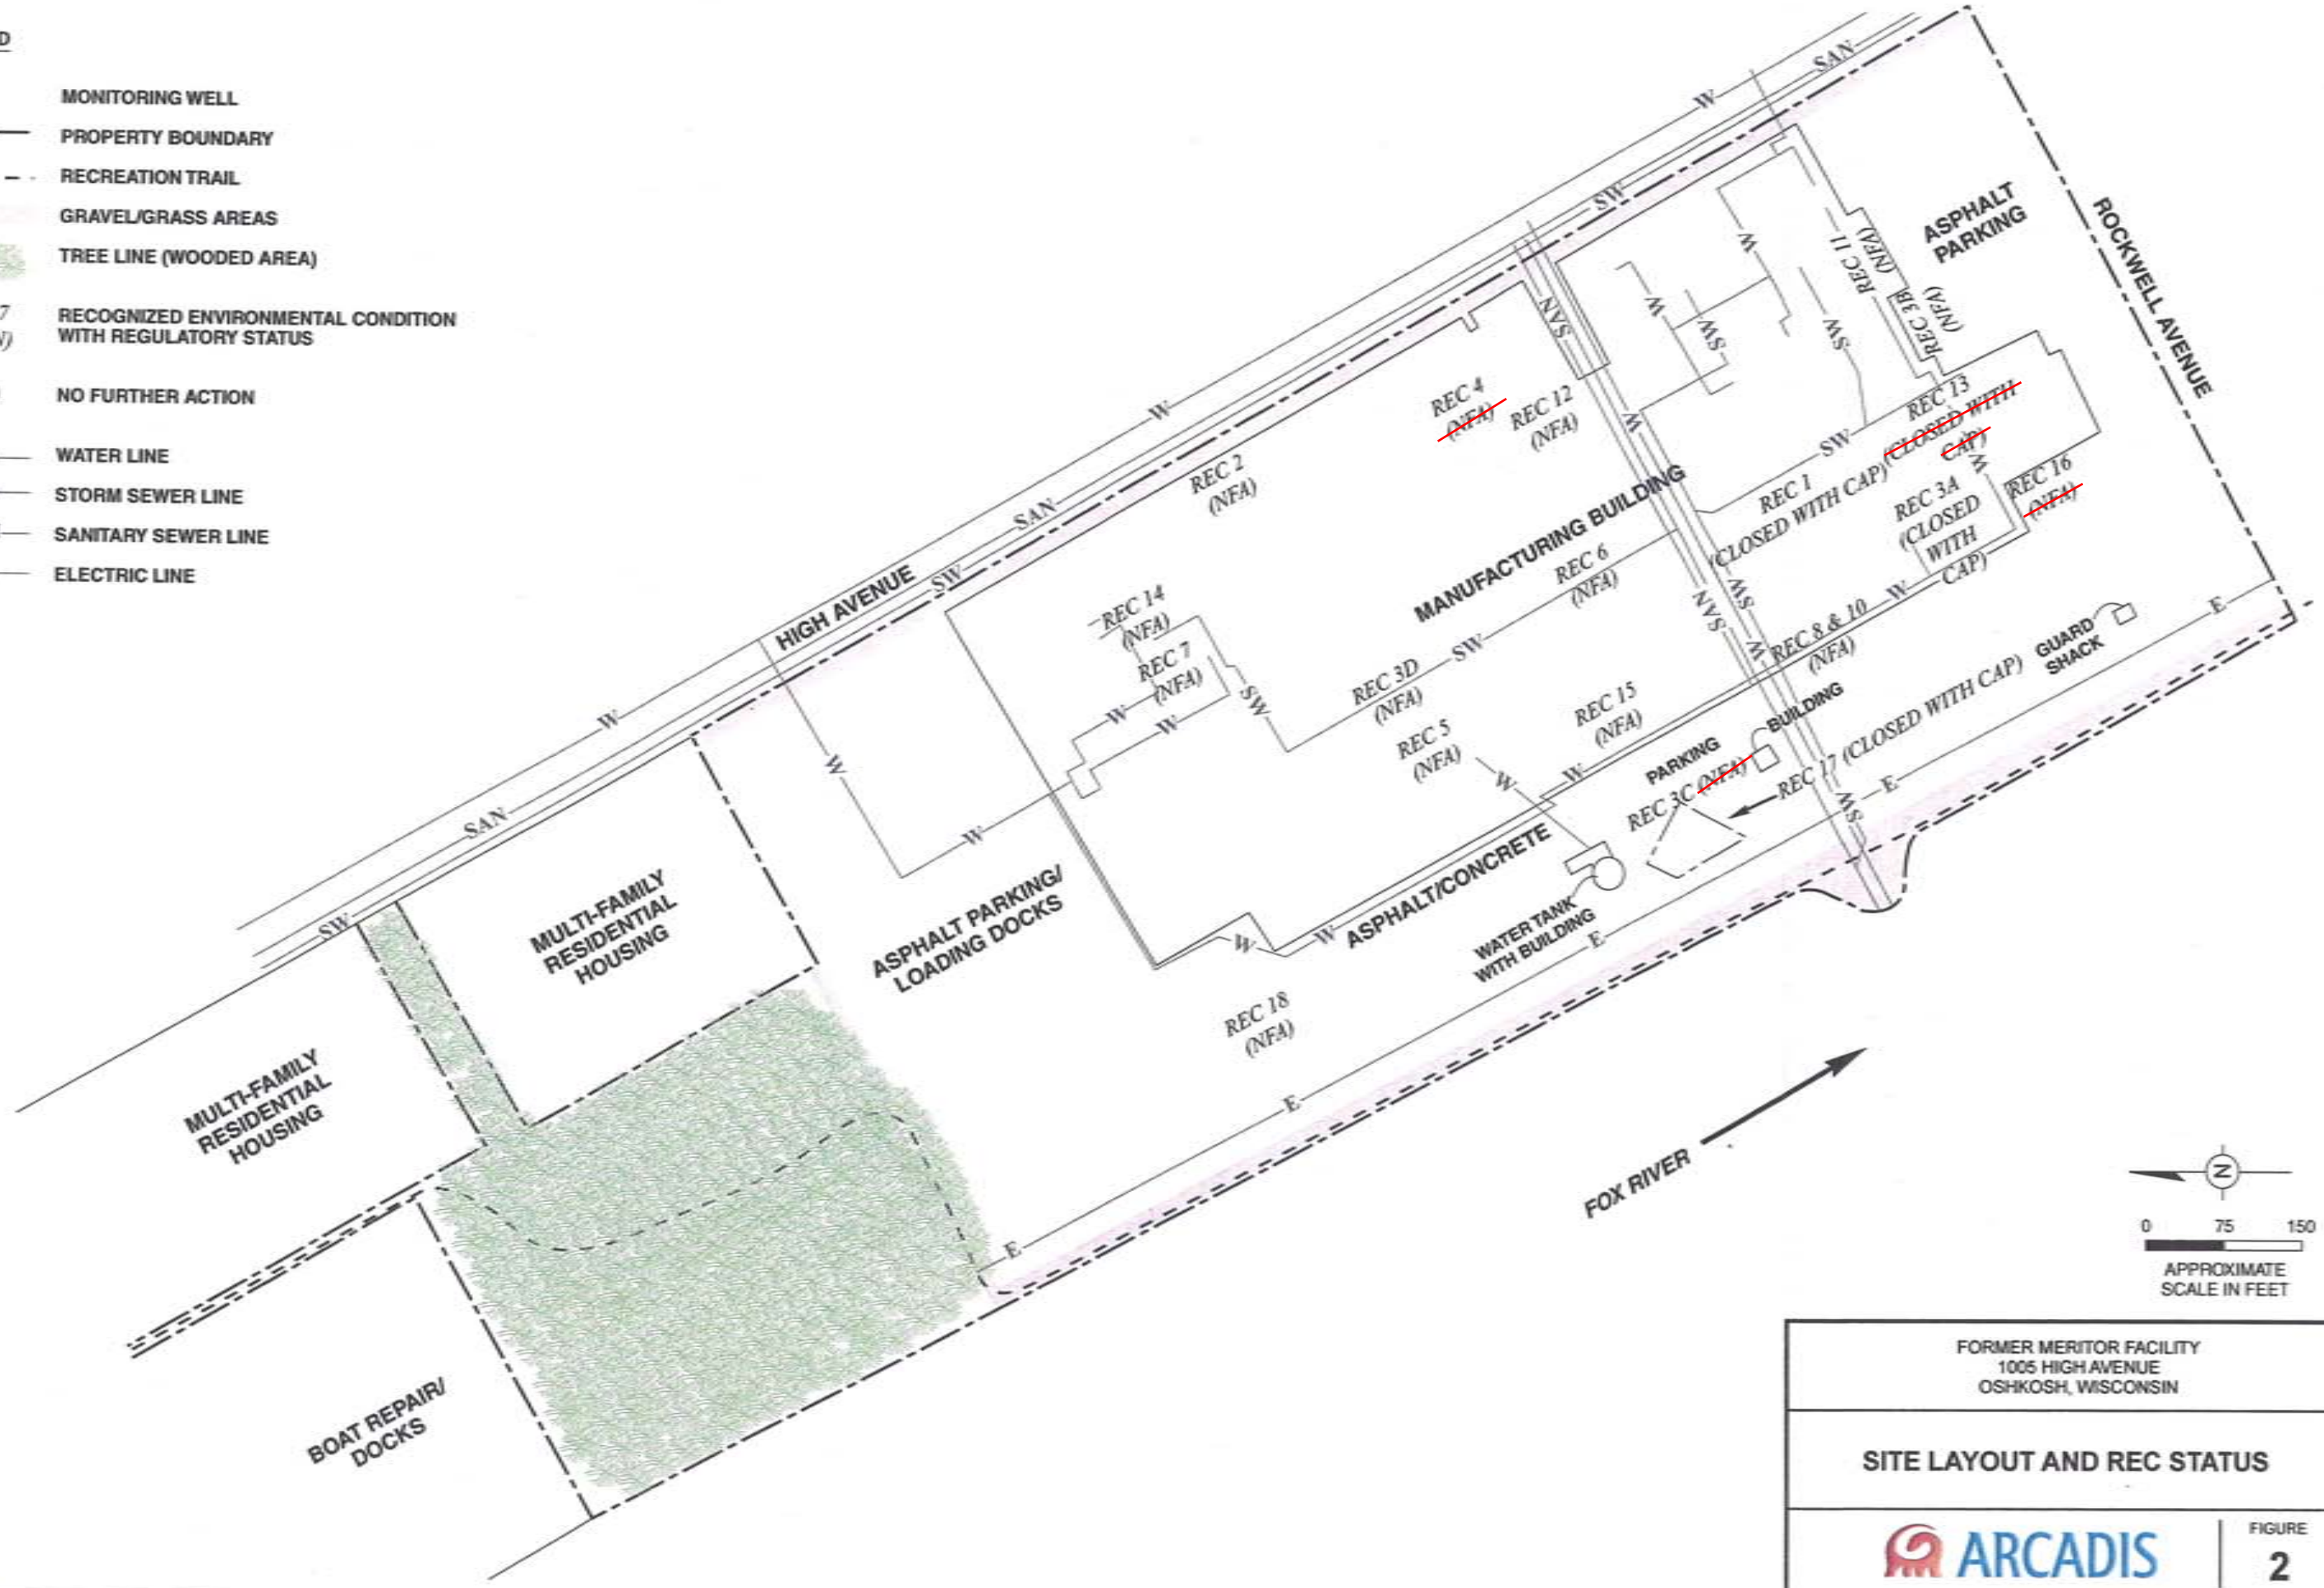

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

SITE LAYOUT AND REC STATUS

ARCADIS

FIGURE
2

28JUNE10ENVIRONMENT\BJM\LMB
MERITORWI1016\OSHKOSH\GRAPHICS\PROPERTY LAYOUT_ REC 17.AI

MW-11
MW-10
MW-7
MW-12
GP-56
HIGH AVENUE
GP-62
GP-65
MW-27
GP-64
MW-28
MW-26
GP-75
GP-99
MW-15
GP-91
MW-13
MW-20
GP-55
GP-80
MW-8
MW-14
GP-92
MW-1
EW-1
MW-19
MW-16
GP-45
GP-93
GP-81
MW-17
MW-2
MW-18
MW-5
GP-94
GP-47
MW-24
GP-83
GP-49
RW-2
RW-4
GP-88
MW-21
MW-23
GP-72
MW-3
MW-9
RW-3
RW-5
MW-25
MW-22
FOX RIVER
GP-101
GP-76
MW-6
ROCKWELL AVENUE
MW-4

LEGEND

GP-76 PERMANENT GEOPROBE WELL

MW-1 MONITORING WELL

0 60 120
SCALE IN FEET

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

© 2010 ARCADIS G&M, Inc.

Area Manager: M. MAIERLE
Project Director: E. BUC
Task Manager: B. MALLET
Technical Review: T. REVIEW

ARCADIS
126 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

LOCATIONS OF NR 141 COMPLIANT MONITORING WELLS AND PERMANENT GEOPROBE WELLS

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: WI001016
Date: 7/02/10
Figure: 23

User Name : mmgarven
Active Version : R18.0a (LMS Tech)
Current Plotstyle : ByColor
Date\Time : Tue, 13 Jul 2010 - 12:31pm
Page Setup: CANON-11X17
Part Table: BLACKDRAW.ctb
Layout Tab: Figure 23
Path\Name : C:\Vproject\Meritor\WI1016\Oshkosh\coddi\REC 16\D14.dwg

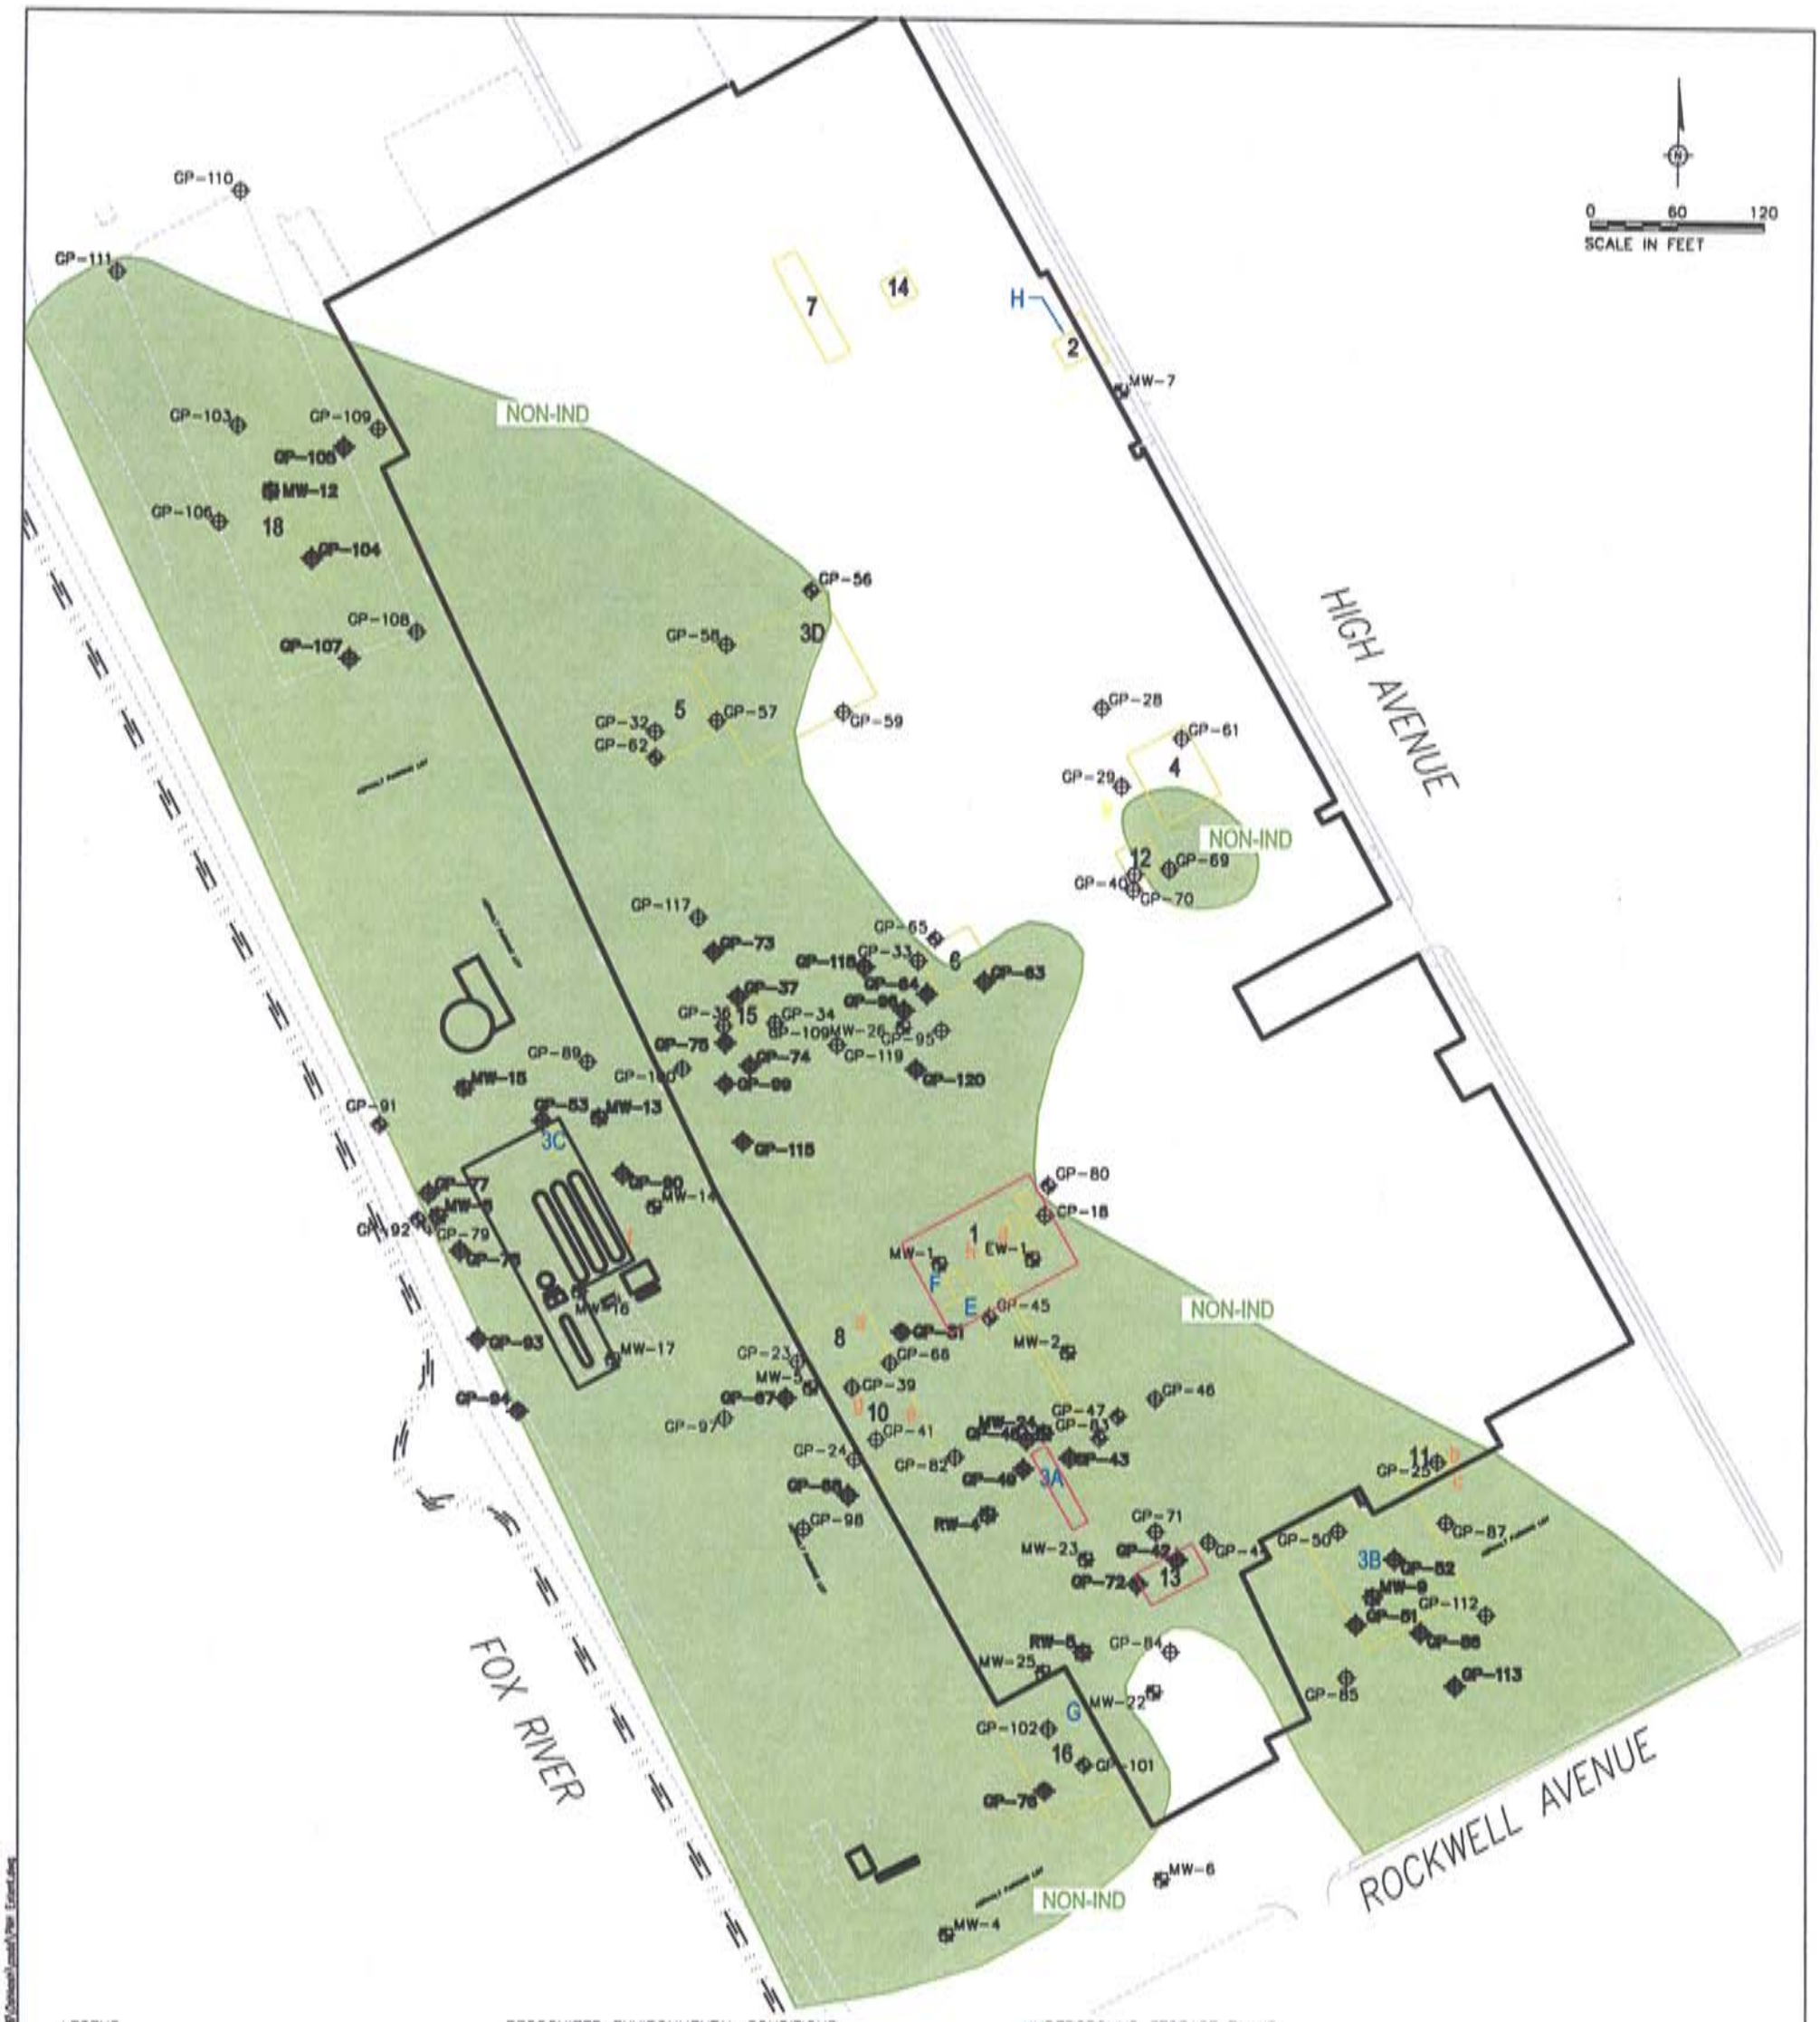

LEGEND

- GP-4 — GEOPROBE BORING
- GP-76 — GEOPROBE BORING/MONITORING WELL
- MW-1 — MONITORING WELL
- NON-IND — BORING/AREA CONTAINS ONE OR MORE PAH EXCEEDANCE OF GENERIC NON-INDUSTRIAL (NON-IND) DIRECT CONTACT RCLs

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

RECOGNIZED ENVIRONMENTAL CONDITIONS

1. HEAT TREATING AREA TUNNEL, QUENCH OIL TANKS AND PITS
2. ASSEMBLY AREA
3. REMOVED USTs
   - A FIVE 4,000-GALLON QUENCH OIL STORAGE
   - B ONE 2,000-GALLON WASTE OIL
   - C ONE 5,000-GALLON FUEL OIL
   - D FOUR 40-GALLON COOLANT
4. HORIZONTAL MACHINING CENTERS (HMCs)
5. VERTICAL TURNING LATHES (VTLs)
6. RADIAL DRILL COOLANT PIT
7. PAINT BOOTH AREA
8. FLAMMABLE LIQUIDS AND HAZARDOUS WASTE STORAGE AREA
9. BOILER ROOM
10. CHEMICAL AND UNIVERSAL WASTE STORAGE
11. COOLANT MIXING ROOM
12. AIR COMPRESSOR ROOM
13. SOUTHERN BROACHES
14. ELEVATOR PIT
15. EX-CELL-O VTL
16. OIL USTs
17. FILL MATERIAL
18. FORMER FINISHED PRODUCTS WAREHOUSE

UNDERGROUND STORAGE TANKS

- 3A FIVE 4,000-GALLON QUENCH OIL STORAGE
- 3B ONE 2,000-GALLON WASTE OIL
- 3C ONE 5,000-GALLON FUEL OIL
- 3D FOUR 40-GALLON COOLANT
- E ONE 10,000-GALLON TANK - QUENCH OIL (COMBINED WITH REC 1)
- F ONE 1,500-GALLON TANK - RESERVE QUENCH OIL (COMBINED WITH REC 1)
- G TWO 8,000-GALLON, FOUR 4,000-GALLON, AND ONE 2,000-GALLON TANKS - OIL STORAGE (REC16)
- H TWO 4,000-GALLON TANKS - GEAR LUBE (REC 2)

ABOVEGROUND STORAGE TANKS

- a THREE 450-GALLON TANKS - OIL (REC 8)
- b ONE 2,000-GALLON TANK - COOLANT (REC 11)
- c ONE 500-GALLON TANK - MINERAL SPIRITS (REC 11)
- d TWO 350-GALLON TANKS, ONE 600-GALLON TANK, ONE 600-GALLON TANK - QUENCH OIL (REC 1)
- e SIX 800-GALLON TANKS - WASTEWATER STORAGE (REC 10)
- f THREE 30,000-GALLON TANKS - PROPANE, ONE 11,000-GALLON TANK - METHANOL, ONE 1,000-GALLON TANK - AMMONIA
- g TWO 1,000-GALLON TANKS - WASTE OIL (REC 10)
- h ONE 7,000-GALLON TANK, THREE 1,200 GALLON TANKS, TWO 1,000-GALLON TANKS, AND TWO 800-GALLON TANKS - QUENCH OIL (REC 1)

Area Manager: M. MARPLE
Project Director: E. WAI
Task Manager: B. MALLET
Technical Review: T. REVIEW

ARCADIS
130 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

EXTENT OF INDIVIDUAL PAH EXCEEDANCES OF GENERIC NON-INDUSTRIAL DIRECT CONTACT STANDARDS

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: W1001016
Date: 7/02/10
Figure: 19

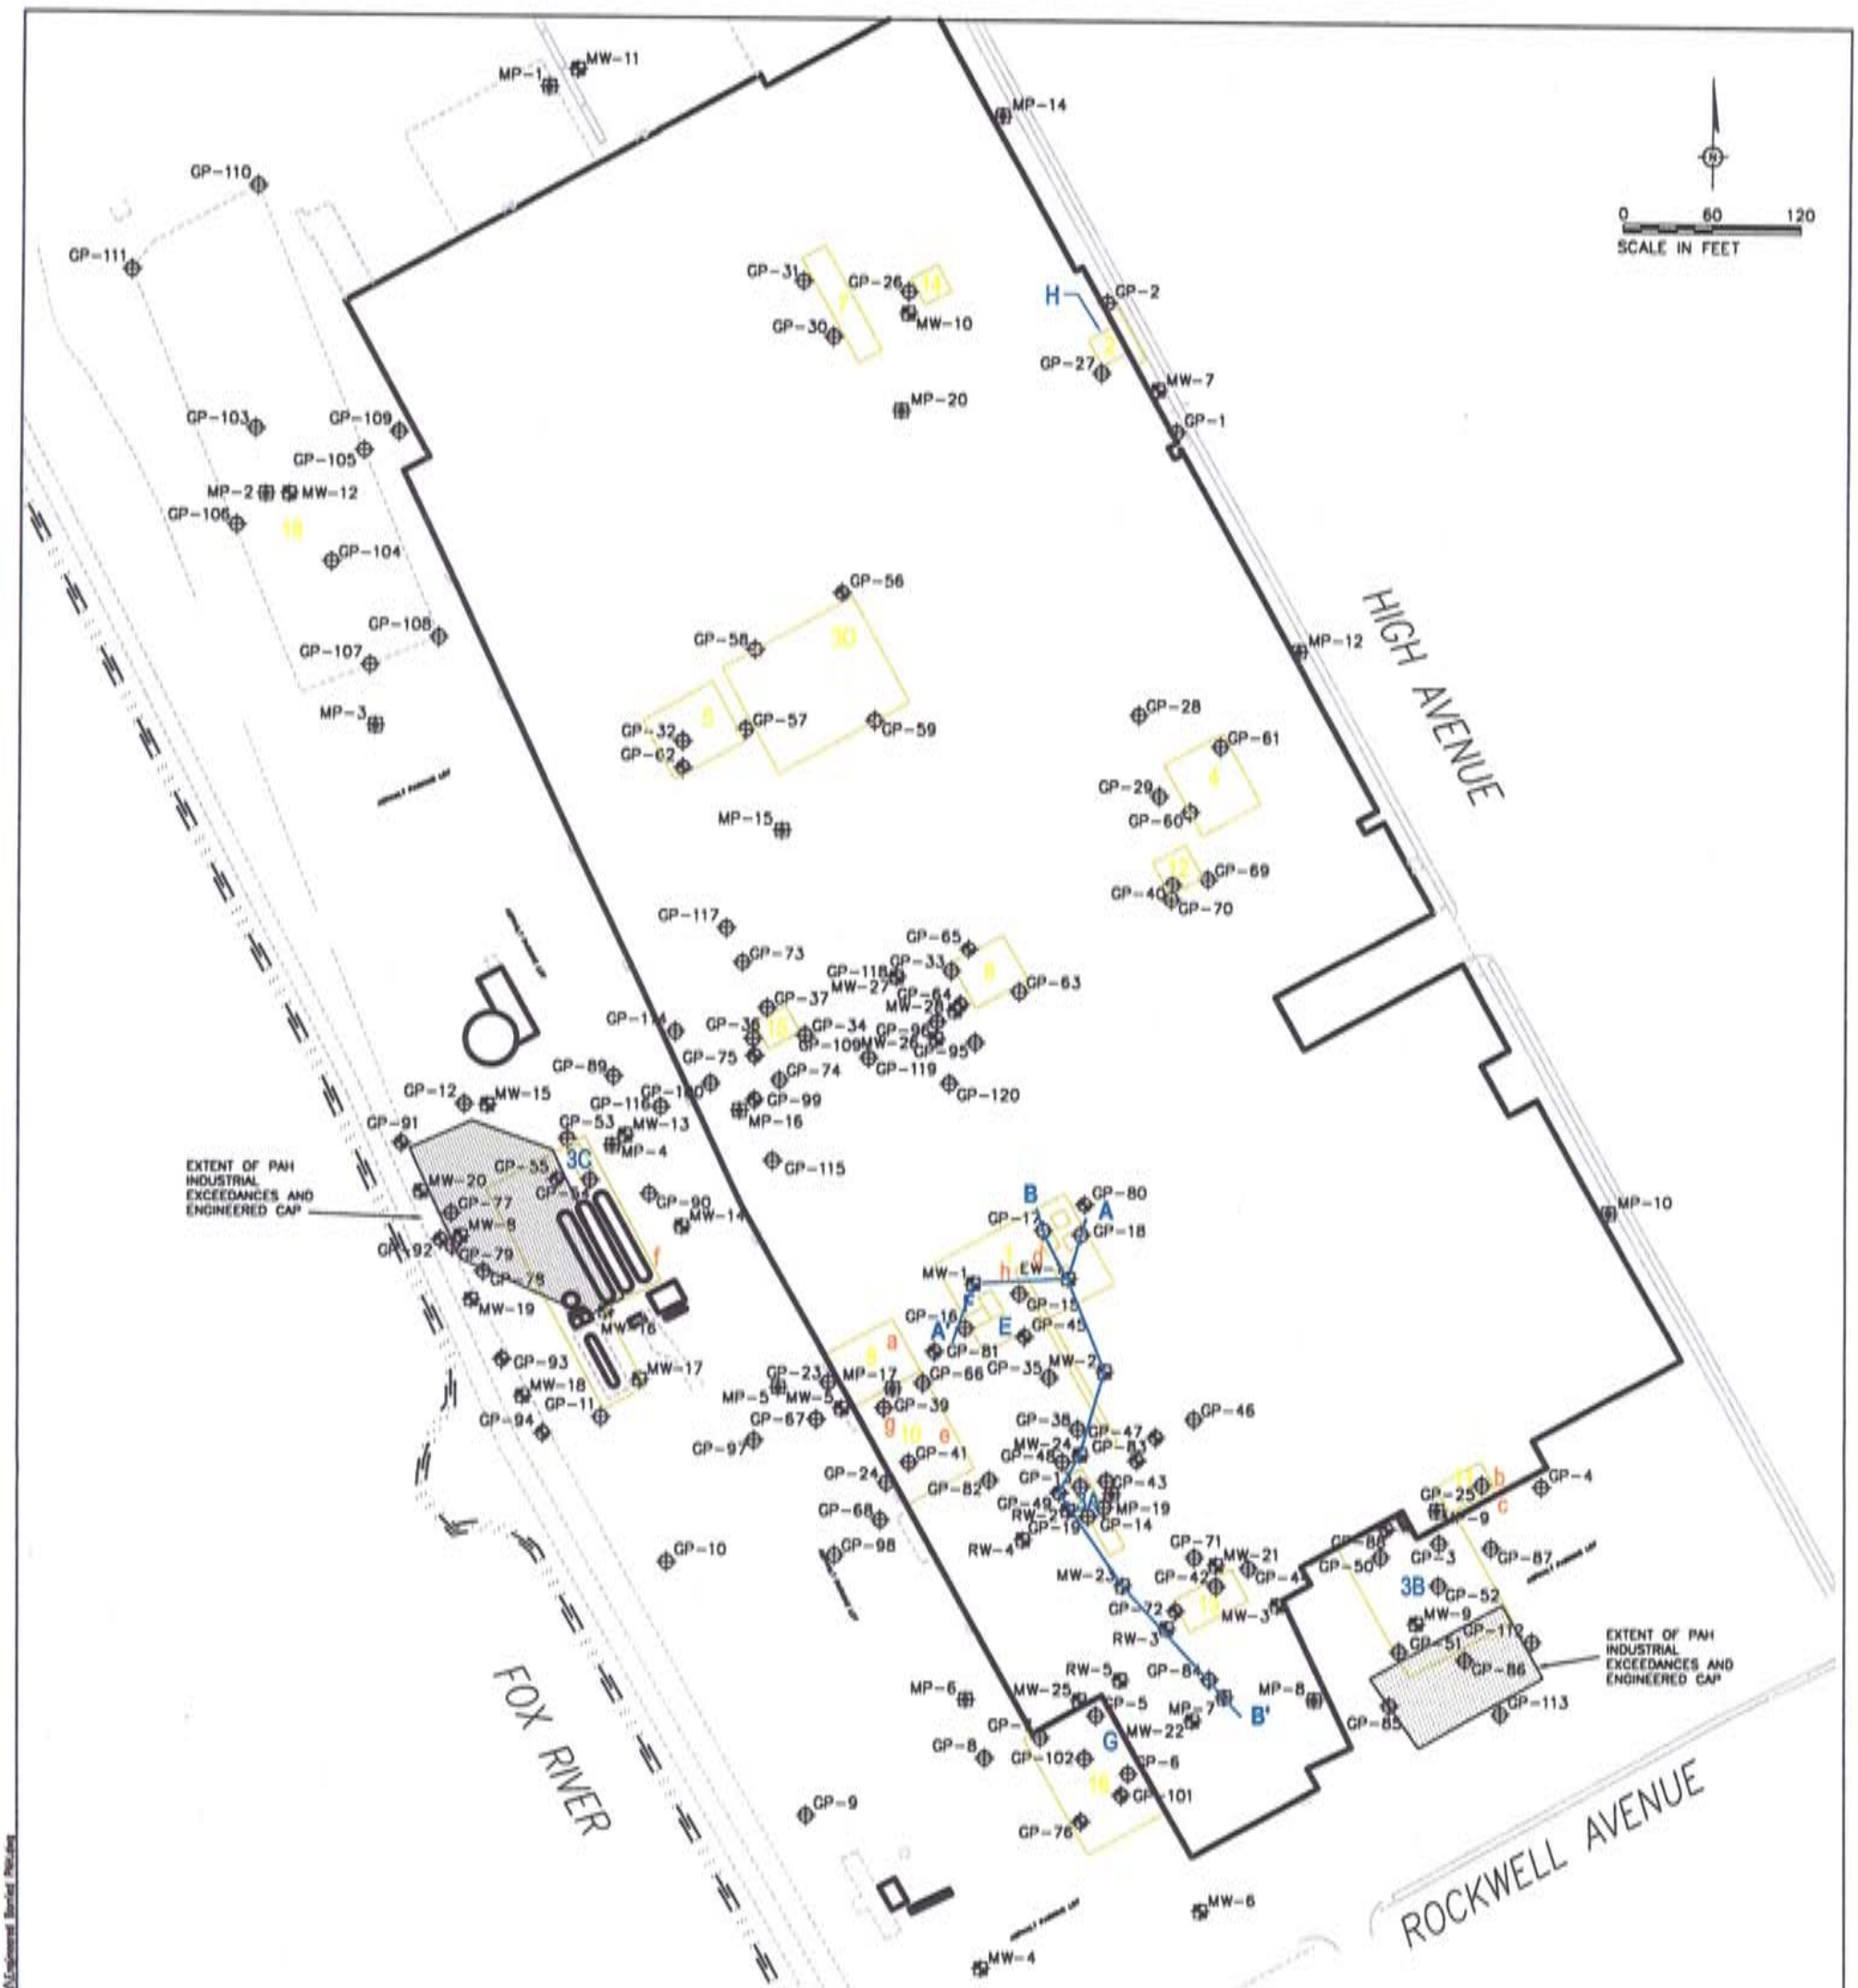

Sample ID	GP-29 (2-4')	GP-32 (2-4')	GP-33 (2-4')	GP-44 (0-4')	GP-46 (2-4')	GP-50 (0-2')	GP-51 (0-2')	GP-51 (2-4')	GP-52 (0-2')	GP-52 (2-4')
Total PAHs	269	2067	871	27	222	4620	9340	12106	2730	14660
B(a)P Equiv	17.81	193.80	66.74	22.52	35.51	629.81	1475.31	1259.34	227.04	1431.11

Sample ID	GP-53 (2-4')	GP-57 (0-2')	GP-59 (2-4')	GP-62 (2-4')	GP-63 (2-4')	GP-64 (2-4')	GP-65 (0-2')	GP-66 (0-2')	GP-67 (0-2')	GP-68 (0-2')
Total PAHs	52215	2662	474	1500	0	60750	0	4753	5801	5688
B(a)P Equiv	666.24	276.11	19.80	164.46	7.78	2597.35	18.98	487.43	666.01	859.22

Sample ID	GP-69 (0-2')	GP-70 (0-2')	GP-71 (0-2')	GP-72 (2-4')	GP-73 (0-2')	GP-73 (2-4')	GP-74 (0-2')	GP-74 (2-4')	GP-75 (0-2')	GP-76 (2-4')
Total PAHs	858	0	0	856	0	6170	740.7	18570	5982	2863
B(a)P Equiv	103.08	38.63	7.66	83.10	19.66	850.94	93.70	1424.25	558.28	239.74

Sample ID	GP-77 (2-4')	GP-78 (2-4')	GP-79 (2-4')	GP-80 (0-2')	GP-81 (2-4')	GP-82 (2-4')	GP-83 (2-4')	GP-84 (2-4')	GP-85 (2-4')	GP-86 (2-4')
Total PAHs	**179,400**	6102	2059	0	20597	0	1276	0	199	**3,197,000**
B(a)P Equiv	**20,416.38**	942.11	246.26	7.78	2346.20	7.61	145.95	9.39	31.53	**246,224.00**

Sample ID	GP-87 (0-2')	GP-89 (2-4')	GP-90 (2-4')	GP-91 (2-4')	GP-92 (2-4')	GP-93 (2-4')	GP-94 (0-2')	GP-95 (2-4')	GP-96 (2-4')	GP-98 (0-2')
Total PAHs	0	64.1	0	570	266	1730	3743	0	1297	706
B(a)P Equiv	66.27	16.88	11.66	80.50	40.24	319.07	481.13	7.67	42.69	111.71

Sample ID	GP-99 (2-4')	GP-100 (2-4')	GP-101 (0-2')	GP-102 (2-4')	GP-103 (2-4')	GP-104 (2-4')	GP-105 (2-4')	GP-106 (0-2')	GP-107 (2-4')	GP-107 (0-2')
Total PAHs	16770	0	102.6	477.3	2772	24070	28250	366	15620	6721
B(a)P Equiv	2166.28	12.37	19.90	83.35	242.47	2673.51	3159.38	36.09	242.49	1013.59

Sample ID	GP-108 (0-2')	GP-109 (2-4')	GP-110 (0-2')	GP-111 (0-2')	GP-113 (2-4')	GP-115 (2-4')	GP-117 (2-4')	GP-118 (2-4')	GP-119 (2-4')	GP-120 (2-4')
Total PAHs	2170	1591	2013	5955	26730	24460	4581	88500	2779	7271
B(a)P Equiv	337.32	79.78	40.34	64.41	2063.28	1937.65	229.50	1446.62	91.33	345.89

Sample ID	MW-1 (2-4')	MW-3 (2-4')	MW-4 (0-2')	MW-5 (2-4')	MW-7 (2-4')	MW-8 (2-4')	MW-9 (2-4')	MW-12 (2-4')	MW-13 (2-4')	MW-14 (2-4')
Total PAHs	2557	0	2791	634	2869.8	**884,619**	11153	12147	4270	3957
B(a)P Equiv	307.73	8.23	313.21	52.95	15.11	**38,013.88**	1324.84	1027.75	693.94	376.35

Sample ID	MW-15 (0-2')	MW-16 (2-4')	MW-17 (2-4')	MW-22 (2-4')	MW-25 (0-2')	RW-4 (2-4')	RW-5 (2-4')	GP-WL-1(2-4')	GP-WL-2(2-4')	GP-WL-3(2-4')
Total PAHs	3902	716	4370	5.2	309.8	5610	8081	2653	2967	469
B(a)P Equiv	560.54	141.00	42.11	7.38	29.52	718.16	851.07	394.31	57.26	62.00

Sample ID	GP-WL-4(2-4')
Total PAHs	920
B(a)P Equiv	199.50

Total PAHs Total detected concentrations of individual PAH constitutents in a soil sample in micrograms per kilogram (µg/kg).
B(a)P Equiv Calculated benzo(a)pyrene equivalent concentration in µg/kg.
BOLD One or more individual PAH constituent concentration exceeds it's respective site-specific industrial direct contact RCL.
BOLD Concentration exceeds the BaPequiv Industrial Direct Contact RCL of 3,900 µg/kg.

LEGEND

- GP-4 GEOPROBE BORING
- GP-76 GEOPROBE BORING/MONITORING WELL
- MW-1 MONITORING WELL
- MP-1 METHANE BAR PROBE
- EXTENT OF ENGINEERED BARRIER FOR PAH INDUSTRIAL EXCEEDANCES IN SURFACE SOILS
- B — B' CROSS SECTION LINE

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

Area Manager: M. MAERLE
Project Director: E. SUC
Task Manager: S. MASLEY
Technical Review: T. REVIEW

ARCADIS
126 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

PAH INDUSTRIAL EXCEEDANCES IN SURFICIAL SOILS WITH EXTENT OF ENGINEERED BARRIERS

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: WI001016
Date: 7/02/10
Figure: 21

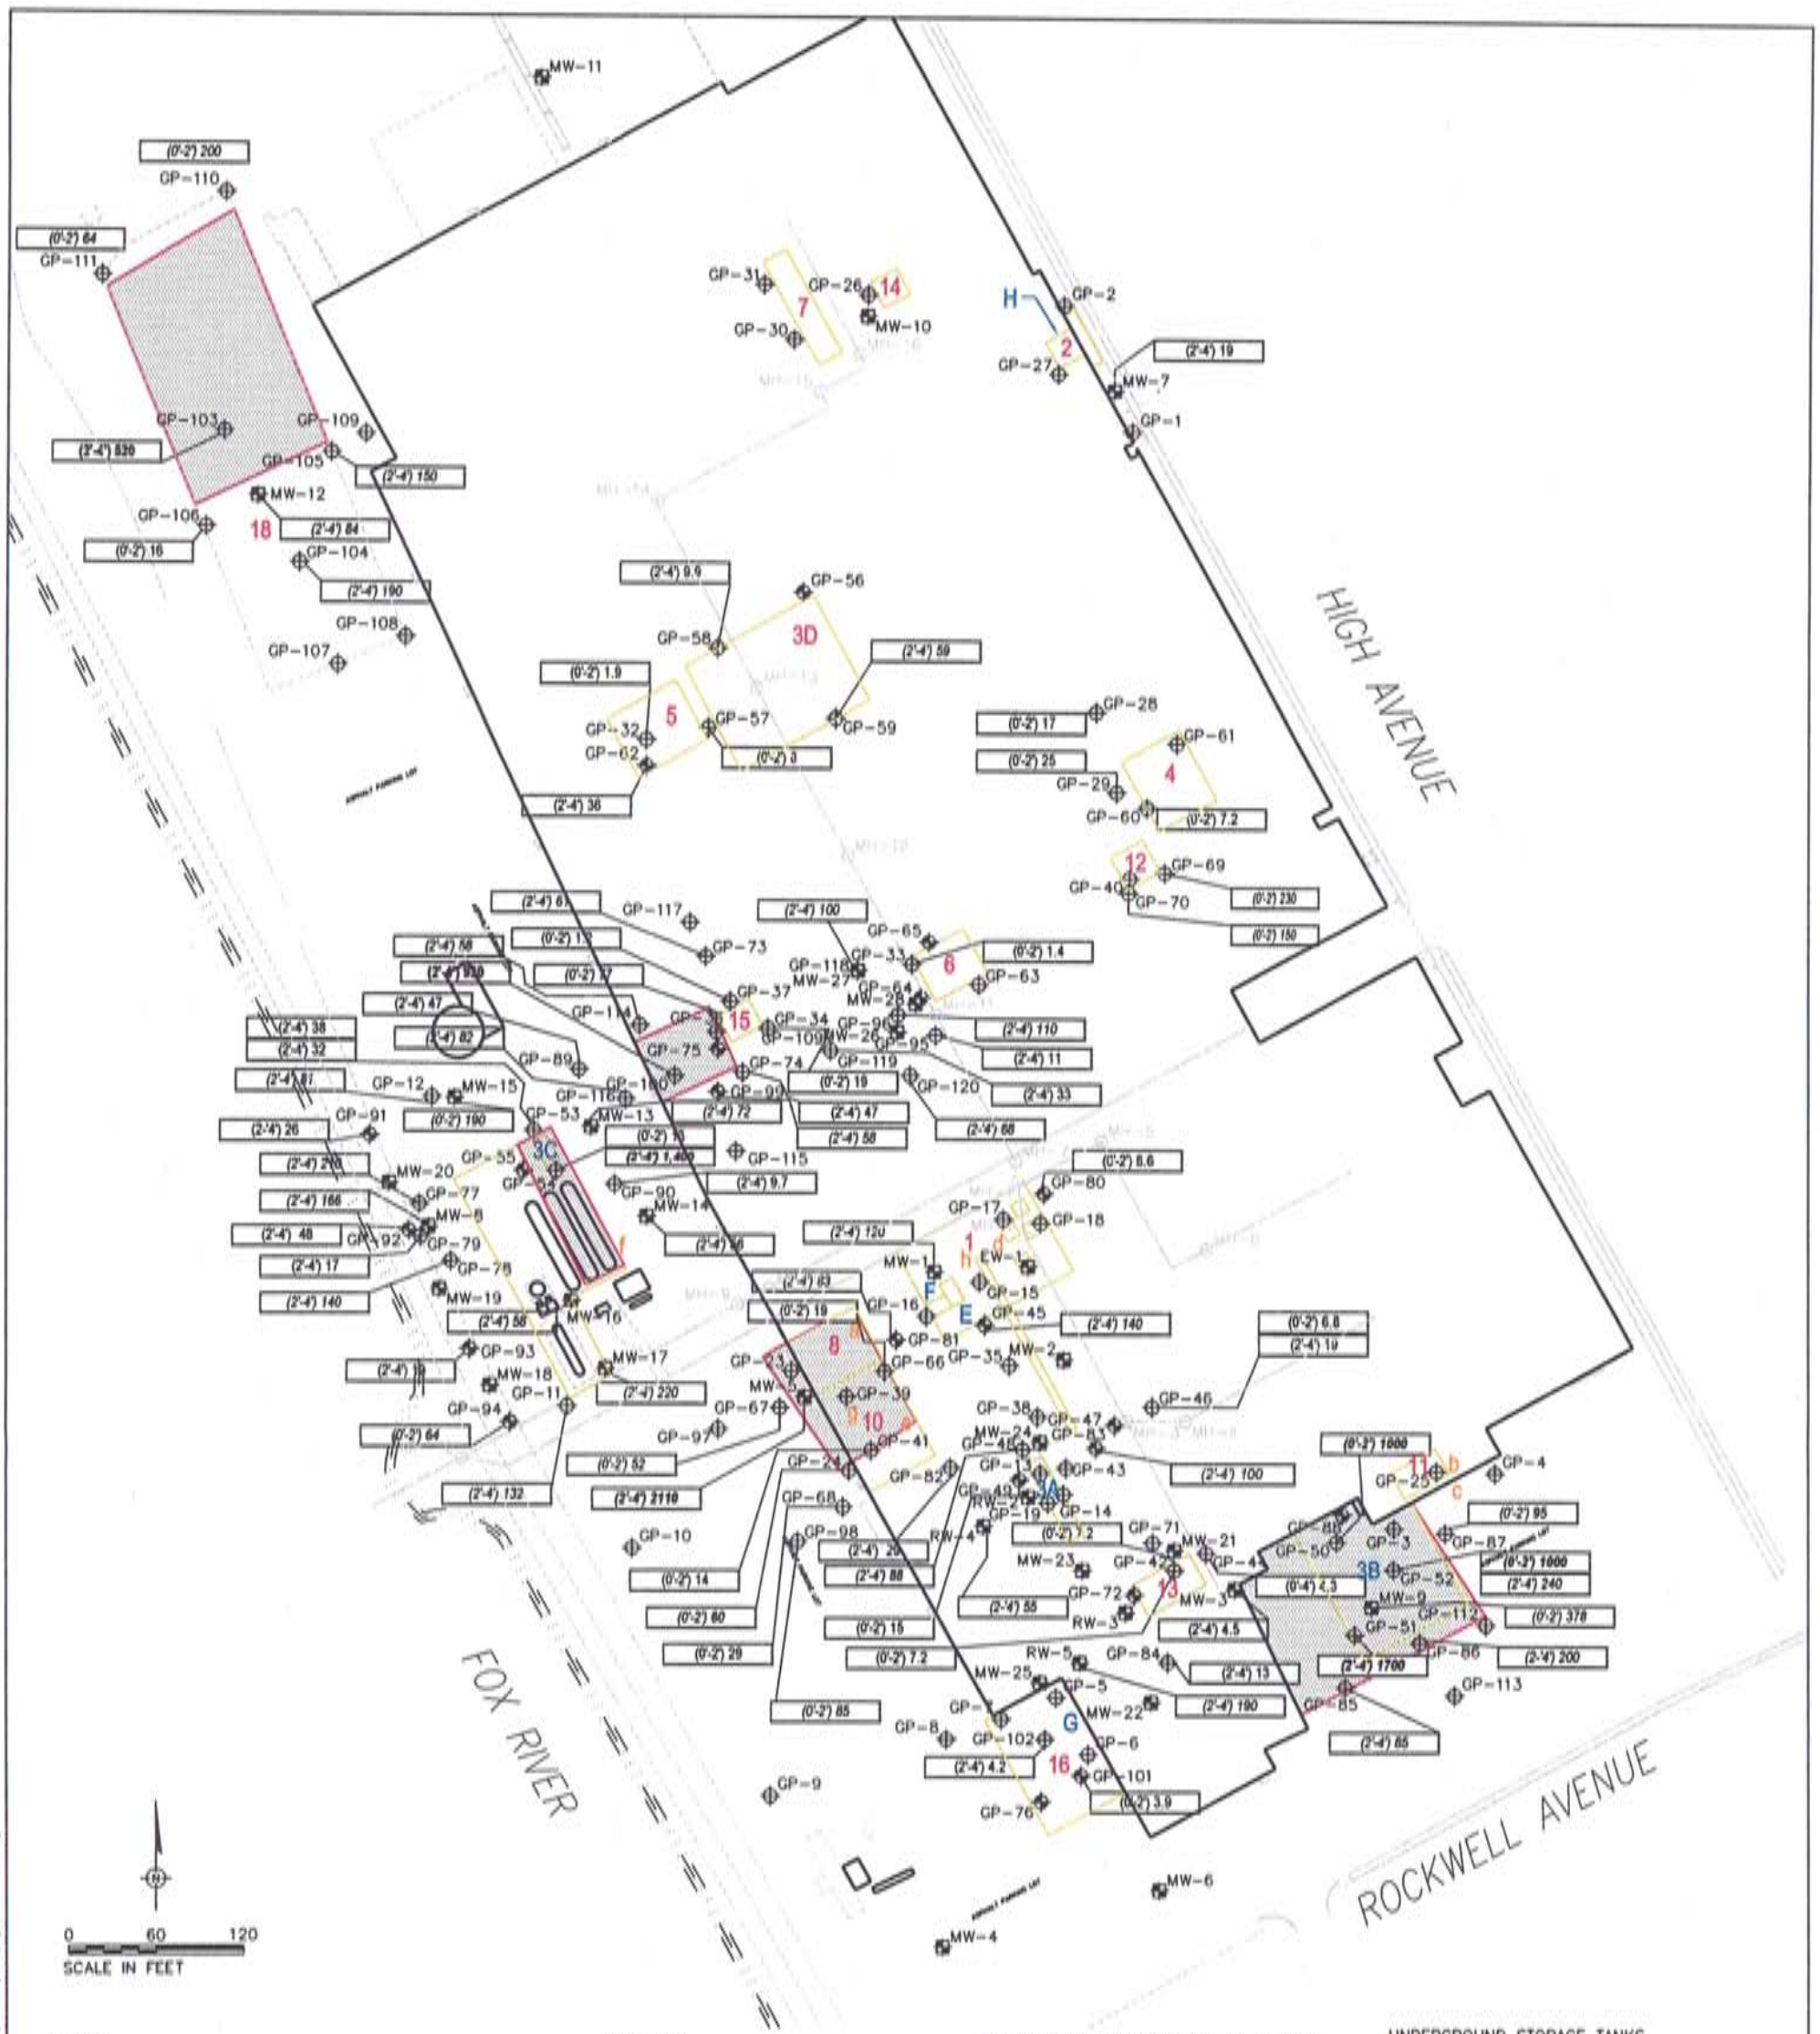

0 60 120
SCALE IN FEET

LEGEND

- GP-4 — GEOPROBE BORING
- GP-76 — GEOPROBE BORING/MONITORING WELL
- MW-1 — MONITORING WELL
- MANHOLE
- STORM SEWER LINE
- EXTENT OF LEAD INDUSTRIAL EXCEEDANCES
- EXTENT OF ENGINEERED BARRIER FOR LEAD INDUSTRIAL EXCEEDANCES IN SURFICIAL SOILS

SOIL DATA

- 3.1 — EXCEEDS INDUSTRIAL DIRECT CONTACT PATHWAY
- 340 — EXCEEDS NON-INDUSTRIAL DIRECT CONTACT PATHWAY
- mg/kg — ALL SOIL VALUES IN MILLIGRAMS PER KILOGRAM, UNLESS OTHERWISE NOTED
- (2'-4") — SAMPLE DEPTH, in feet below ground surface

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

RECOGNIZED ENVIRONMENTAL CONDITIONS

1. HEAT TREATING AREA TUNNEL, QUENCH OIL TANKS AND PITS
2. ASSEMBLY AREA
3. REMOVED USTs
   - A FIVE 4,000-GALLON QUENCH OIL STORAGE
   - B ONE 2,000-GALLON WASTE OIL
   - C ONE 5,000-GALLON FUEL OIL
   - D FOUR 40-GALLON COOLANT
4. HORIZONTAL MACHINING CENTERS (HMCs)
5. VERTICAL TURNING LATHES (VTLs)
6. RADIAL DRILL COOLANT PIT
7. PAINT BOOTH AREA
8. FLAMMABLE LIQUIDS AND HAZARDOUS WASTE STORAGE AREA
9. BOILER ROOM
10. CHEMICAL AND UNIVERSAL WASTE STORAGE
11. COOLANT MIXING ROOM
12. AIR COMPRESSOR ROOM
13. SOUTHERN BROACHES
14. ELEVATOR PIT
15. EX-CELL-O VTL
16. OIL USTs
17. FILL MATERIAL

UNDERGROUND STORAGE TANKS

- 3A FIVE 4,000-GALLON QUENCH OIL STORAGE
- 3B ONE 2,000-GALLON WASTE OIL
- 3C ONE 5,000-GALLON FUEL OIL
- 3D FOUR 40-GALLON COOLANT
- E ONE 10,000-GALLON TANK - QUENCH OIL (COMBINED WITH REC 1)
- F ONE 1,500-GALLON TANK - RESERVE QUENCH OIL (COMBINED WITH REC 1)
- G TWO 8,000-GALLON, FOUR 4,000-GALLON, AND ONE 2,000-GALLON TANKS - OIL STORAGE (REC16)
- H TWO 4,000-GALLON TANKS - GEAR LUBE (REC 2)

ABOVEGROUND STORAGE TANKS

- a THREE 450-GALLON TANKS - OIL (REC 8)
- b ONE 2,000-GALLON TANK - COOLANT (REC 11)
- c ONE 500-GALLON TANK - MINERAL SPIRITS (REC 11)
- d TWO 350-GALLON TANKS, ONE 600-GALLON TANK, ONE 600-GALLON TANK - QUENCH OIL (REC 1)
- e SIX 800-GALLON TANKS - WASTEWATER STORAGE (REC 10)
- f THREE 30,000-GALLON TANKS - PROPANE, ONE 11,000-GALLON TANK - METHANOL, ONE 1,000-GALLON TANK - AMMONIA
- g TWO 1,000-GALLON TANKS - WASTE OIL (REC 10)
- h ONE 7,000-GALLON TANK, THREE 1,200 GALLON TANKS, TWO 1,000-GALLON TANKS, AND TWO 800-GALLON TANKS - QUENCH OIL (REC 1)

Area Manager: M. MAERLE
Project Director: B. BUC
Task Manager: B. MALLET
Technical Review: T. REVIEW

ARCADIS
135 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

LEAD INDUSTRIAL EXCEEDANCES IN SURFICIAL SOILS WITH EXTENT OF ENGINEERED BARRIERS

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: W1001016
Date: 7/02/10
Figure: 22

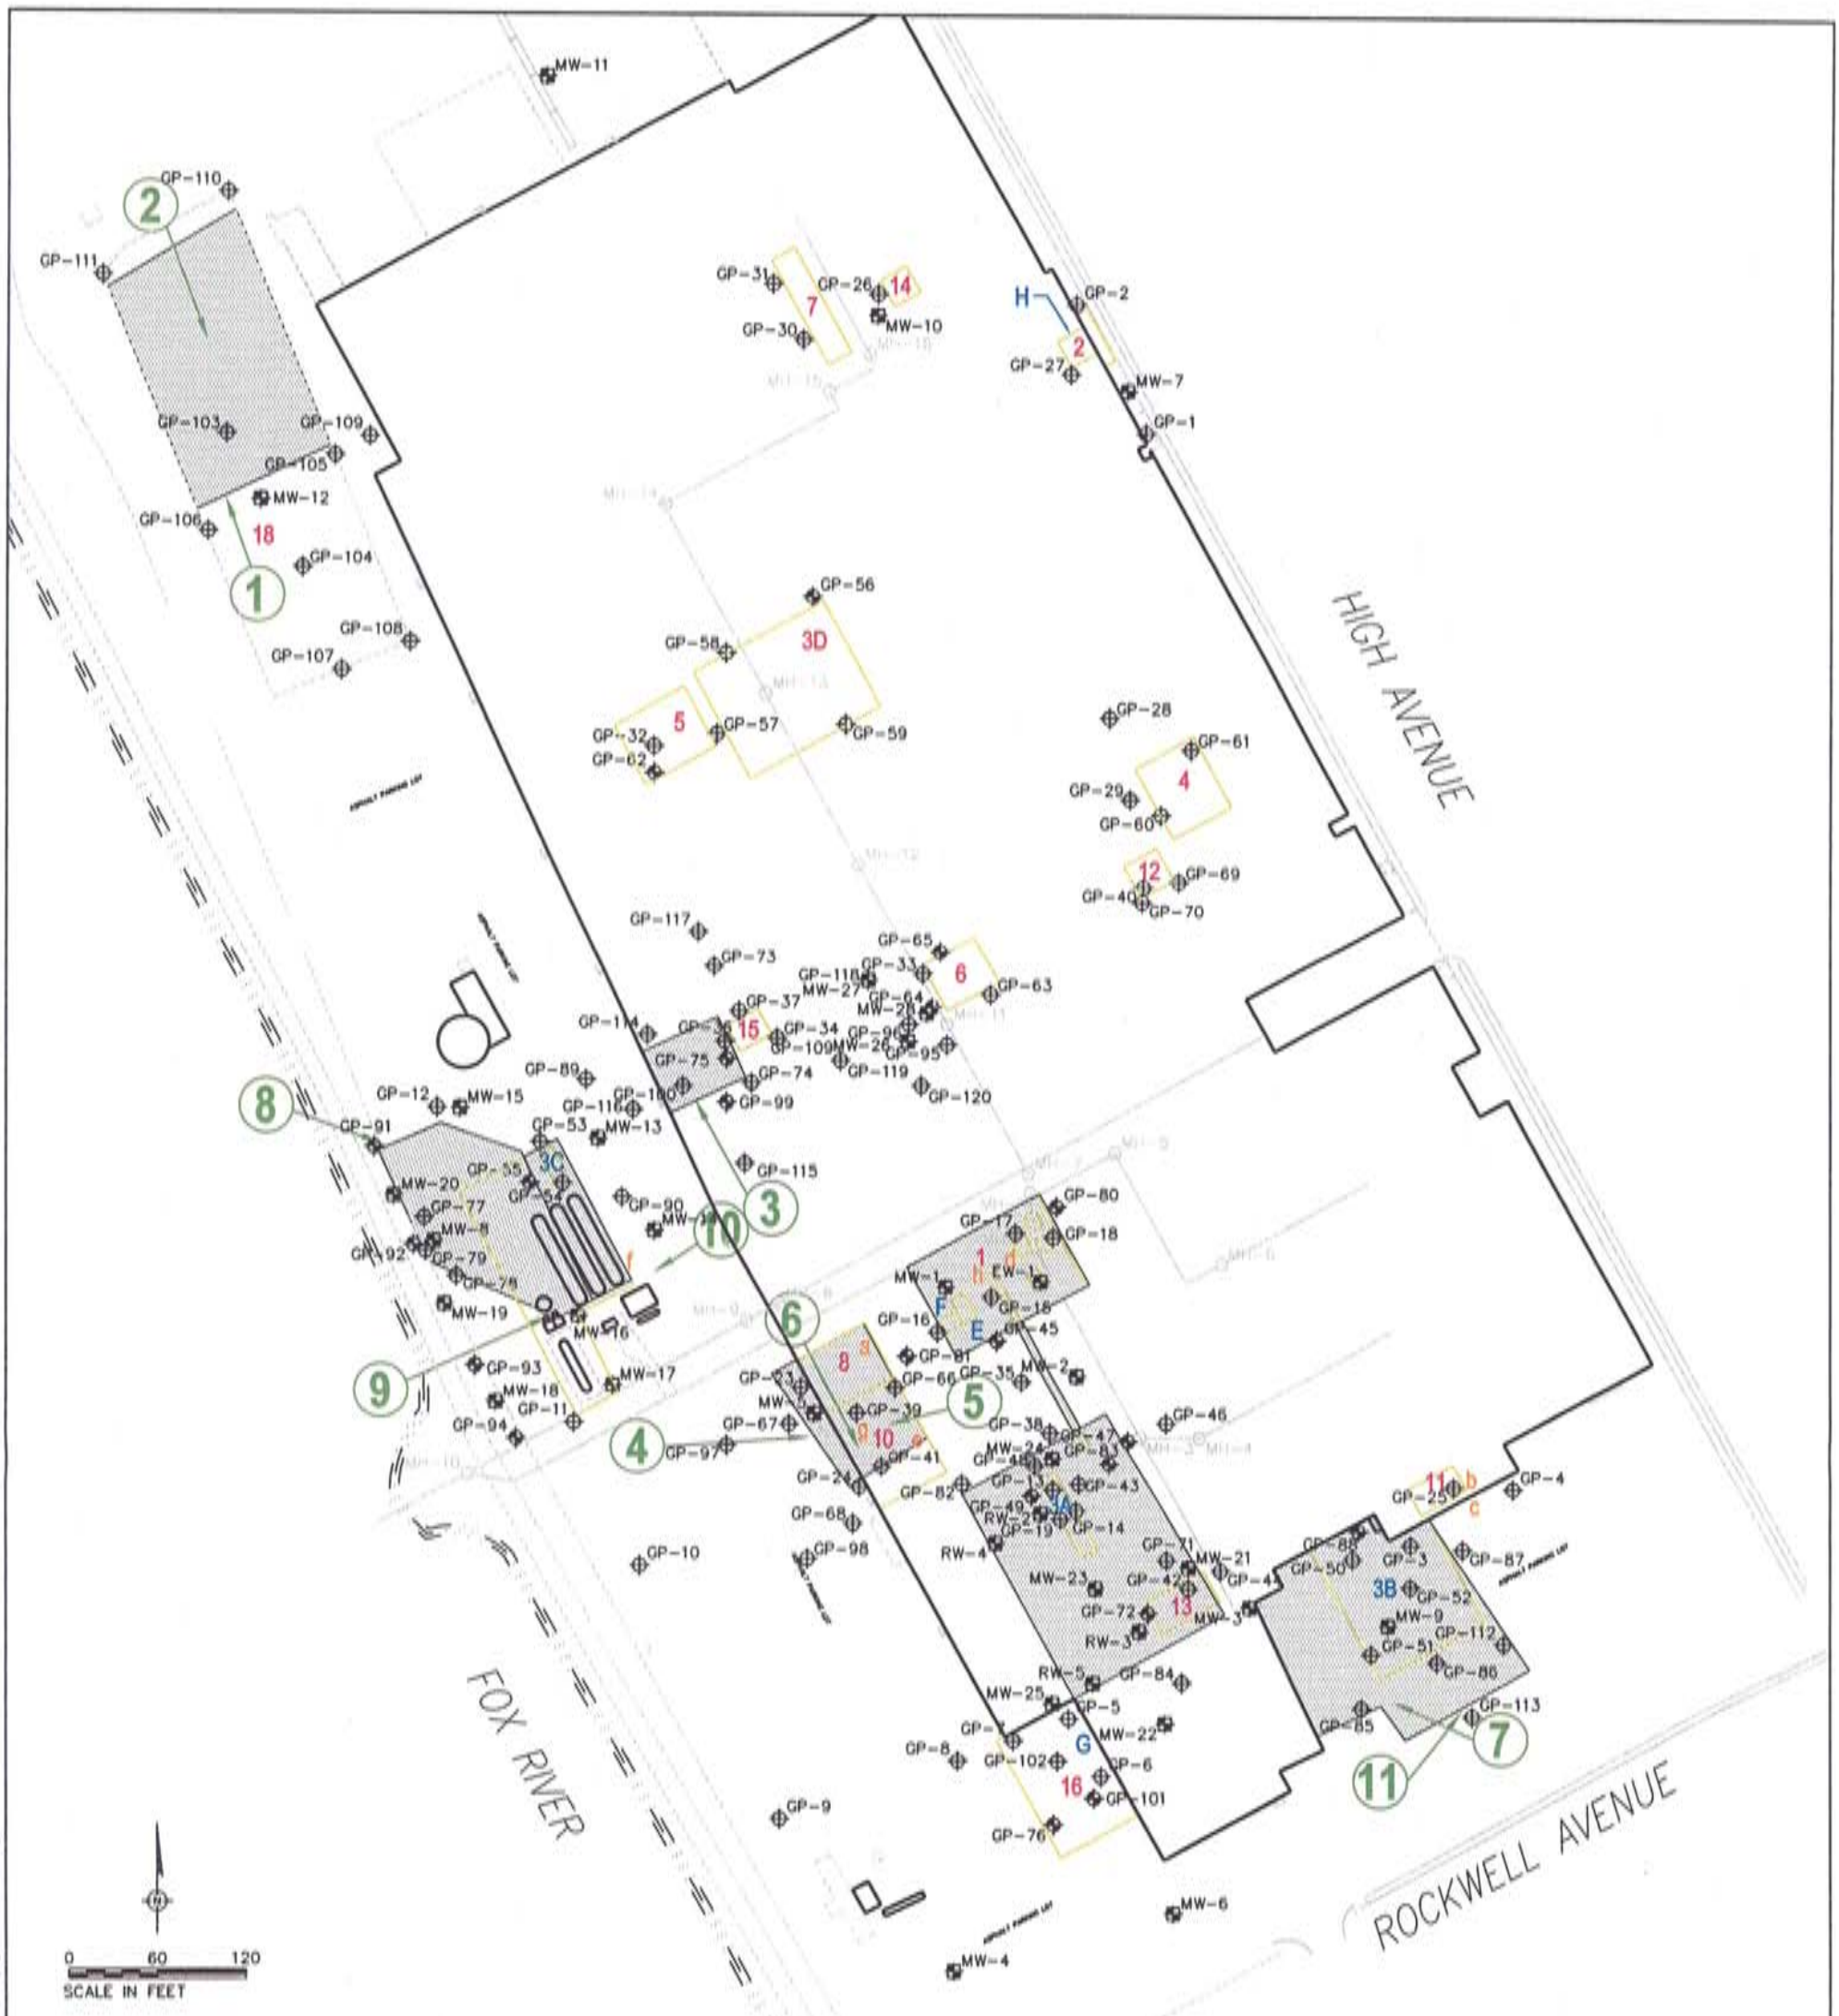

LEGEND

- GP-4 — GEOPROBE BORING
- GP-76 — GEOPROBE BORING/MONITORING WELL
- MW-1 — MONITORING WELL
- MANHOLE
- STORM SEWER LINE
- EXTENT OF ENGINEERED BARRIER
- (4) — ENGINEERED BARRIER CONDITION (SEE PHOTOGRAPHIC LOG)

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

RECOGNIZED ENVIRONMENTAL CONDITIONS

1. HEAT TREATING AREA TUNNEL, QUENCH OIL TANKS AND PITS
2. ASSEMBLY AREA
3. REMOVED USTs
   - A FIVE 4,000-GALLON QUENCH OIL STORAGE
   - B ONE 2,000-GALLON WASTE OIL
   - C ONE 5,000-GALLON FUEL OIL
   - D FOUR 40-GALLON COOLANT
4. HORIZONTAL MACHINING CENTERS (HMCs)
5. VERTICAL TURNING LATHES (VTLs)
6. RADIAL DRILL COOLANT PIT
7. PAINT BOOTH AREA
8. FLAMMABLE LIQUIDS AND HAZARDOUS WASTE STORAGE AREA
9. BOILER ROOM
10. CHEMICAL AND UNIVERSAL WASTE STORAGE
11. COOLANT MIXING ROOM
12. AIR COMPRESSOR ROOM
13. SOUTHERN BROACHES
14. ELEVATOR PIT
15. EX-CELL-O VTL
16. OIL USTs
17. FILL MATERIAL

UNDERGROUND STORAGE TANKS

- 3A FIVE 4,000-GALLON QUENCH OIL STORAGE
- 3B ONE 2,000-GALLON WASTE OIL
- 3C ONE 5,000-GALLON FUEL OIL
- 3D FOUR 40-GALLON COOLANT
- E ONE 10,000-GALLON TANK - QUENCH OIL (COMBINED WITH REC 1)
- F ONE 1,500-GALLON TANK - RESERVE QUENCH OIL (COMBINED WITH REC 1)
- G TWO 8,000-GALLON, FOUR 4,000-GALLON, AND ONE 2,000-GALLON TANKS - OIL STORAGE (REC16)
- H TWO 4,000-GALLON TANKS - GEAR LUBE (REC 2)

ABOVEGROUND STORAGE TANKS

- a THREE 450-GALLON TANKS - OIL (REC 8)
- b ONE 2,000-GALLON TANK - COOLANT (REC 11)
- c ONE 500-GALLON TANK - MINERAL SPIRITS (REC 11)
- d TWO 350-GALLON TANKS, ONE 600-GALLON TANK, ONE 600-GALLON TANK - QUENCH OIL (REC 1)
- e SIX 800-GALLON TANKS - WASTEWATER STORAGE (REC 10)
- f THREE 30,000-GALLON TANKS - PROPANE, ONE 11,000-GALLON TANK - METHANOL, ONE 1,000-GALLON TANK - AMMONIA
- g TWO 1,000-GALLON TANKS - WASTE OIL (REC 10)
- h ONE 7,000-GALLON TANK, THREE 1,200 GALLON TANKS, TWO 1,000-GALLON TANKS, AND TWO 800-GALLON TANKS - QUENCH OIL (REC 1)

Area Manager: M. MARBLE
Project Director: E. BUC
Task Manager: B. MASLET
Technical Review: T. REVIEW

ARCADIS
135 North Jefferson Street, Suite 400
Milwaukee, Wisconsin 53202
Tel: 414-276-7742 Fax: 414-276-7603
www.arcadis-us.com

EXTENT OF ENGINEERED BARRIERS WITH THE PHOTOGRAPHIC LOCATIONS DEPICTING CONDITION

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

Project Number: WI001016
Date: 7/02/10
Figure: 29

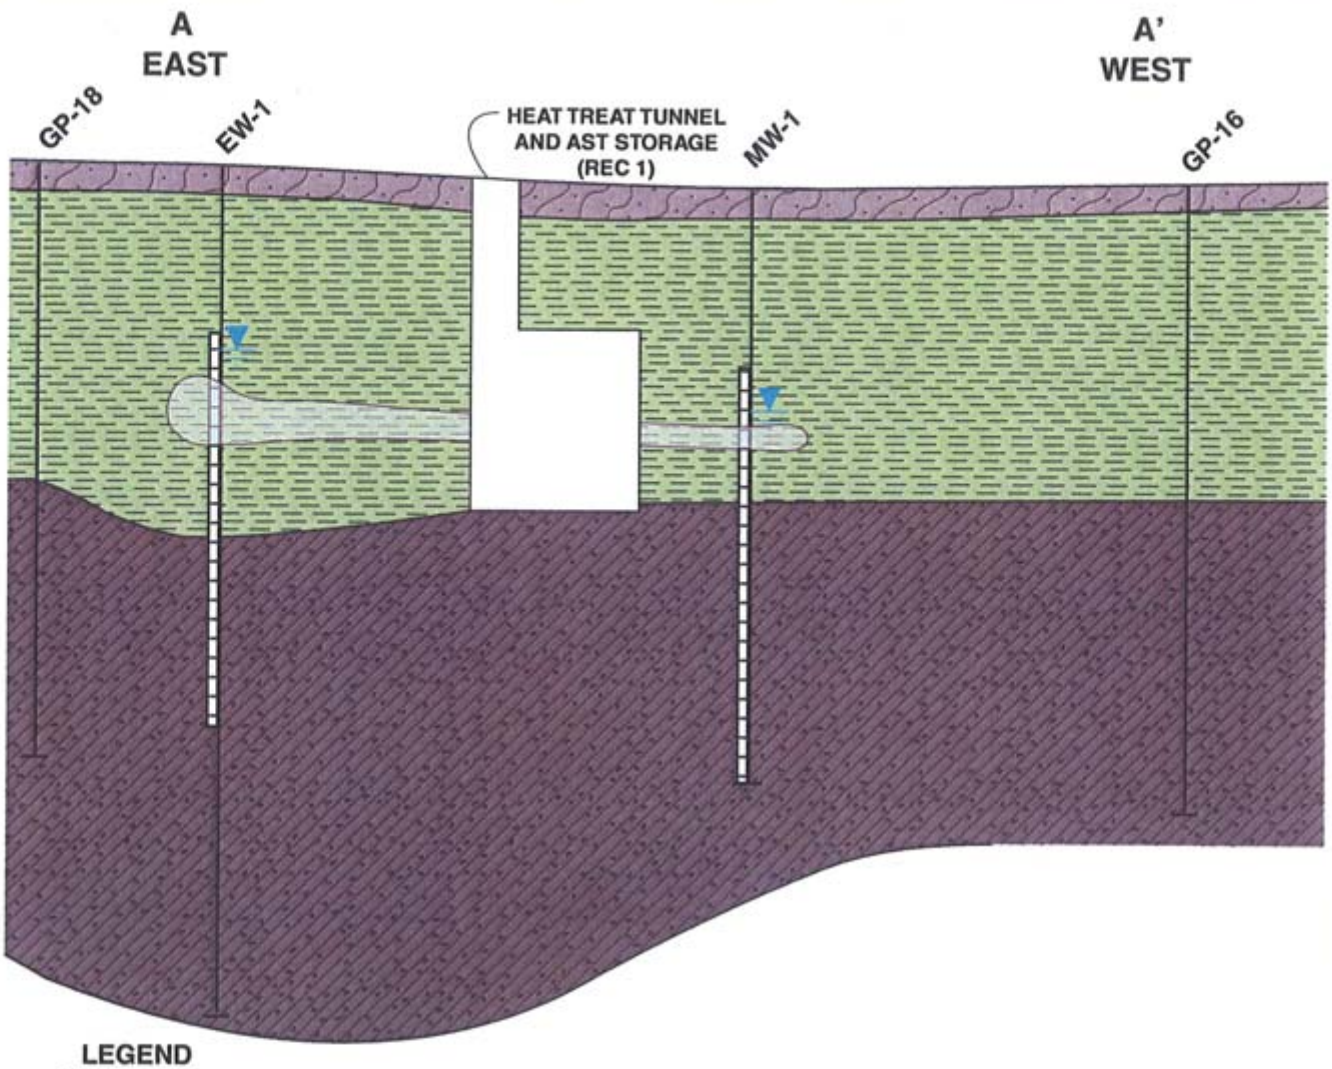

LEGEND

- Fill Material: dark brown to light brown silt with gravel, trace silty clay and sands, and organics (i.e., wood chips).
- Dark grey silty clay with yellowish brown silt.
- Concrete Building Foundation
- Probable Extent of Residual Product Impacts
- WATER LEVEL 5/10
- MONITORING WELL SCREEN

5
2.5
0 10 20
APPROXIMATE SCALE IN FEET
VERTICAL EXAGGERATION = 4x

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

EAST/WEST GEOLOGIC CROSS-SECTION OF REC 1

ARCADIS

FIGURE
17

30JUNE10\ENVIRONMENT\BJM\LMB
MERITOR\WI1016\OSHKOSH\GRAPHICS\XSEC_EW.AI

B
NORTH

B'
SOUTH

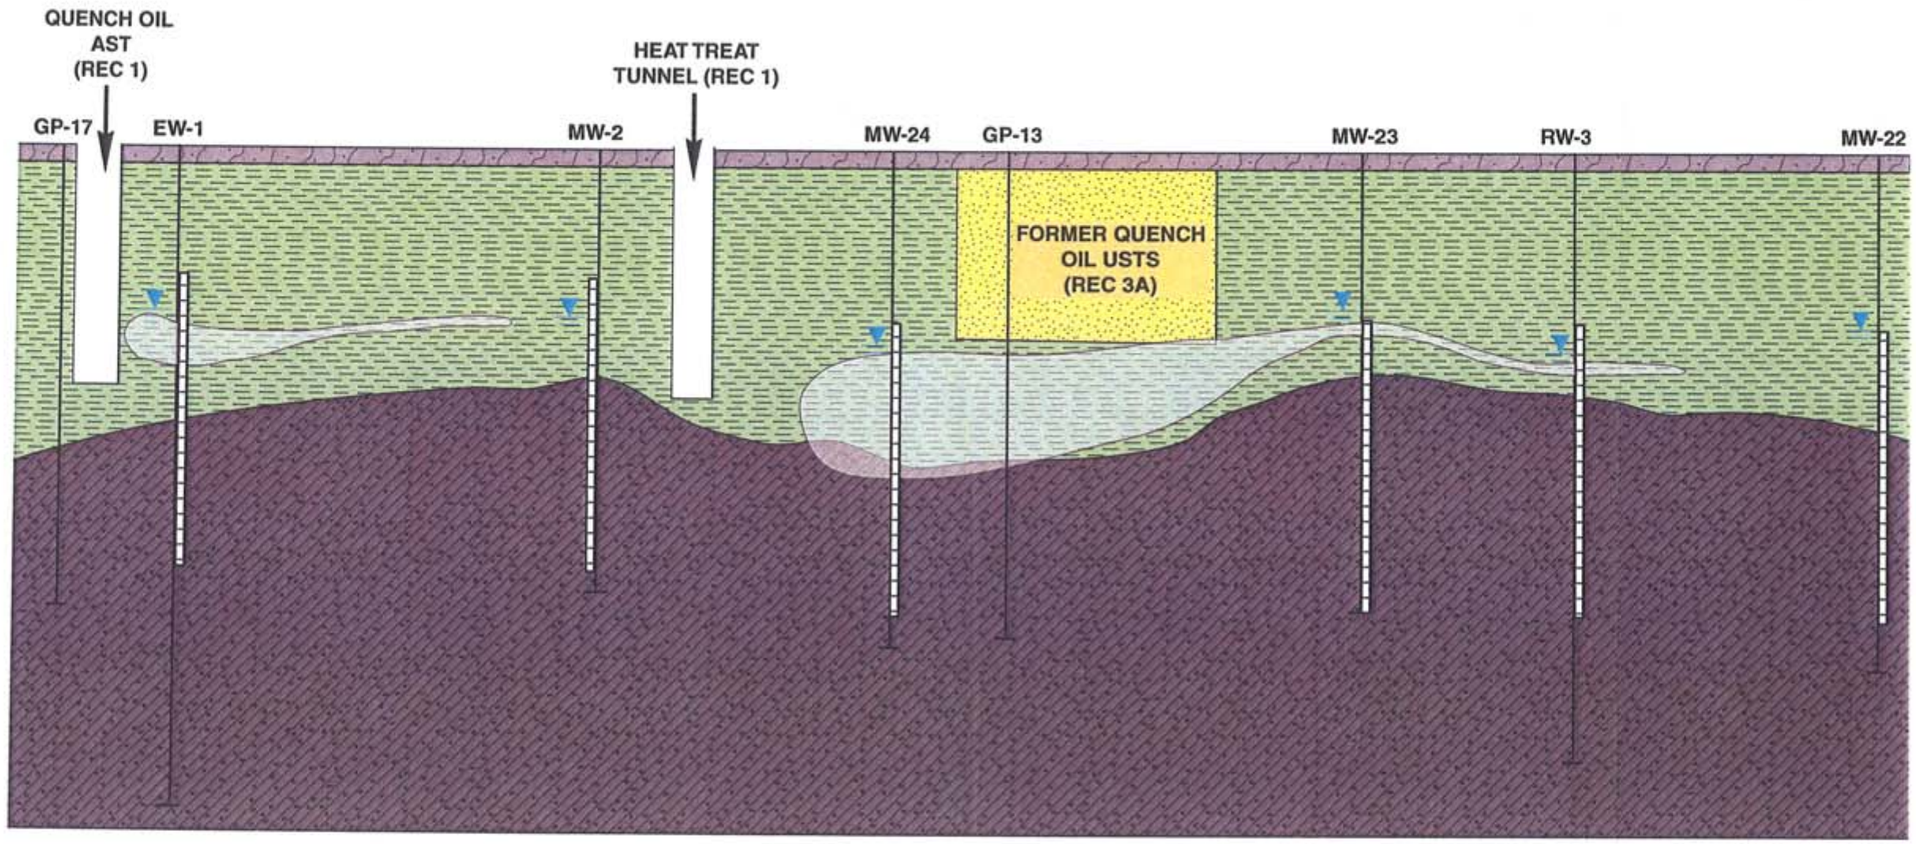

LEGEND

- Sandy Back Fill
- Fill Material: dark brown to light brown silt with gravel, trace silty clay and sands, and organics (i.e., wood chips).
- Dark grey silty clay with yellowish brown silt.
- Concrete Building Foundation
- Probable Extent of Residual Product Impacts
- WATER LEVEL 5/10
- MONITORING WELL SCREEN

5
2.5
0 15 30
APPROXIMATE SCALE IN FEET
VERTICAL EXAGGERATION =

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

NORTH/SOUTH GEOLOGIC CROSS-SECTION OF REC 1, REC 3A, AND REC 13

ARCADIS

FIGURE 18

02JULY10\ENVIRONMENT\BJM\LMB
MERITORW1016\OSHKOSH\GRAPHICS\NORTH SOUTH XSEC.AI

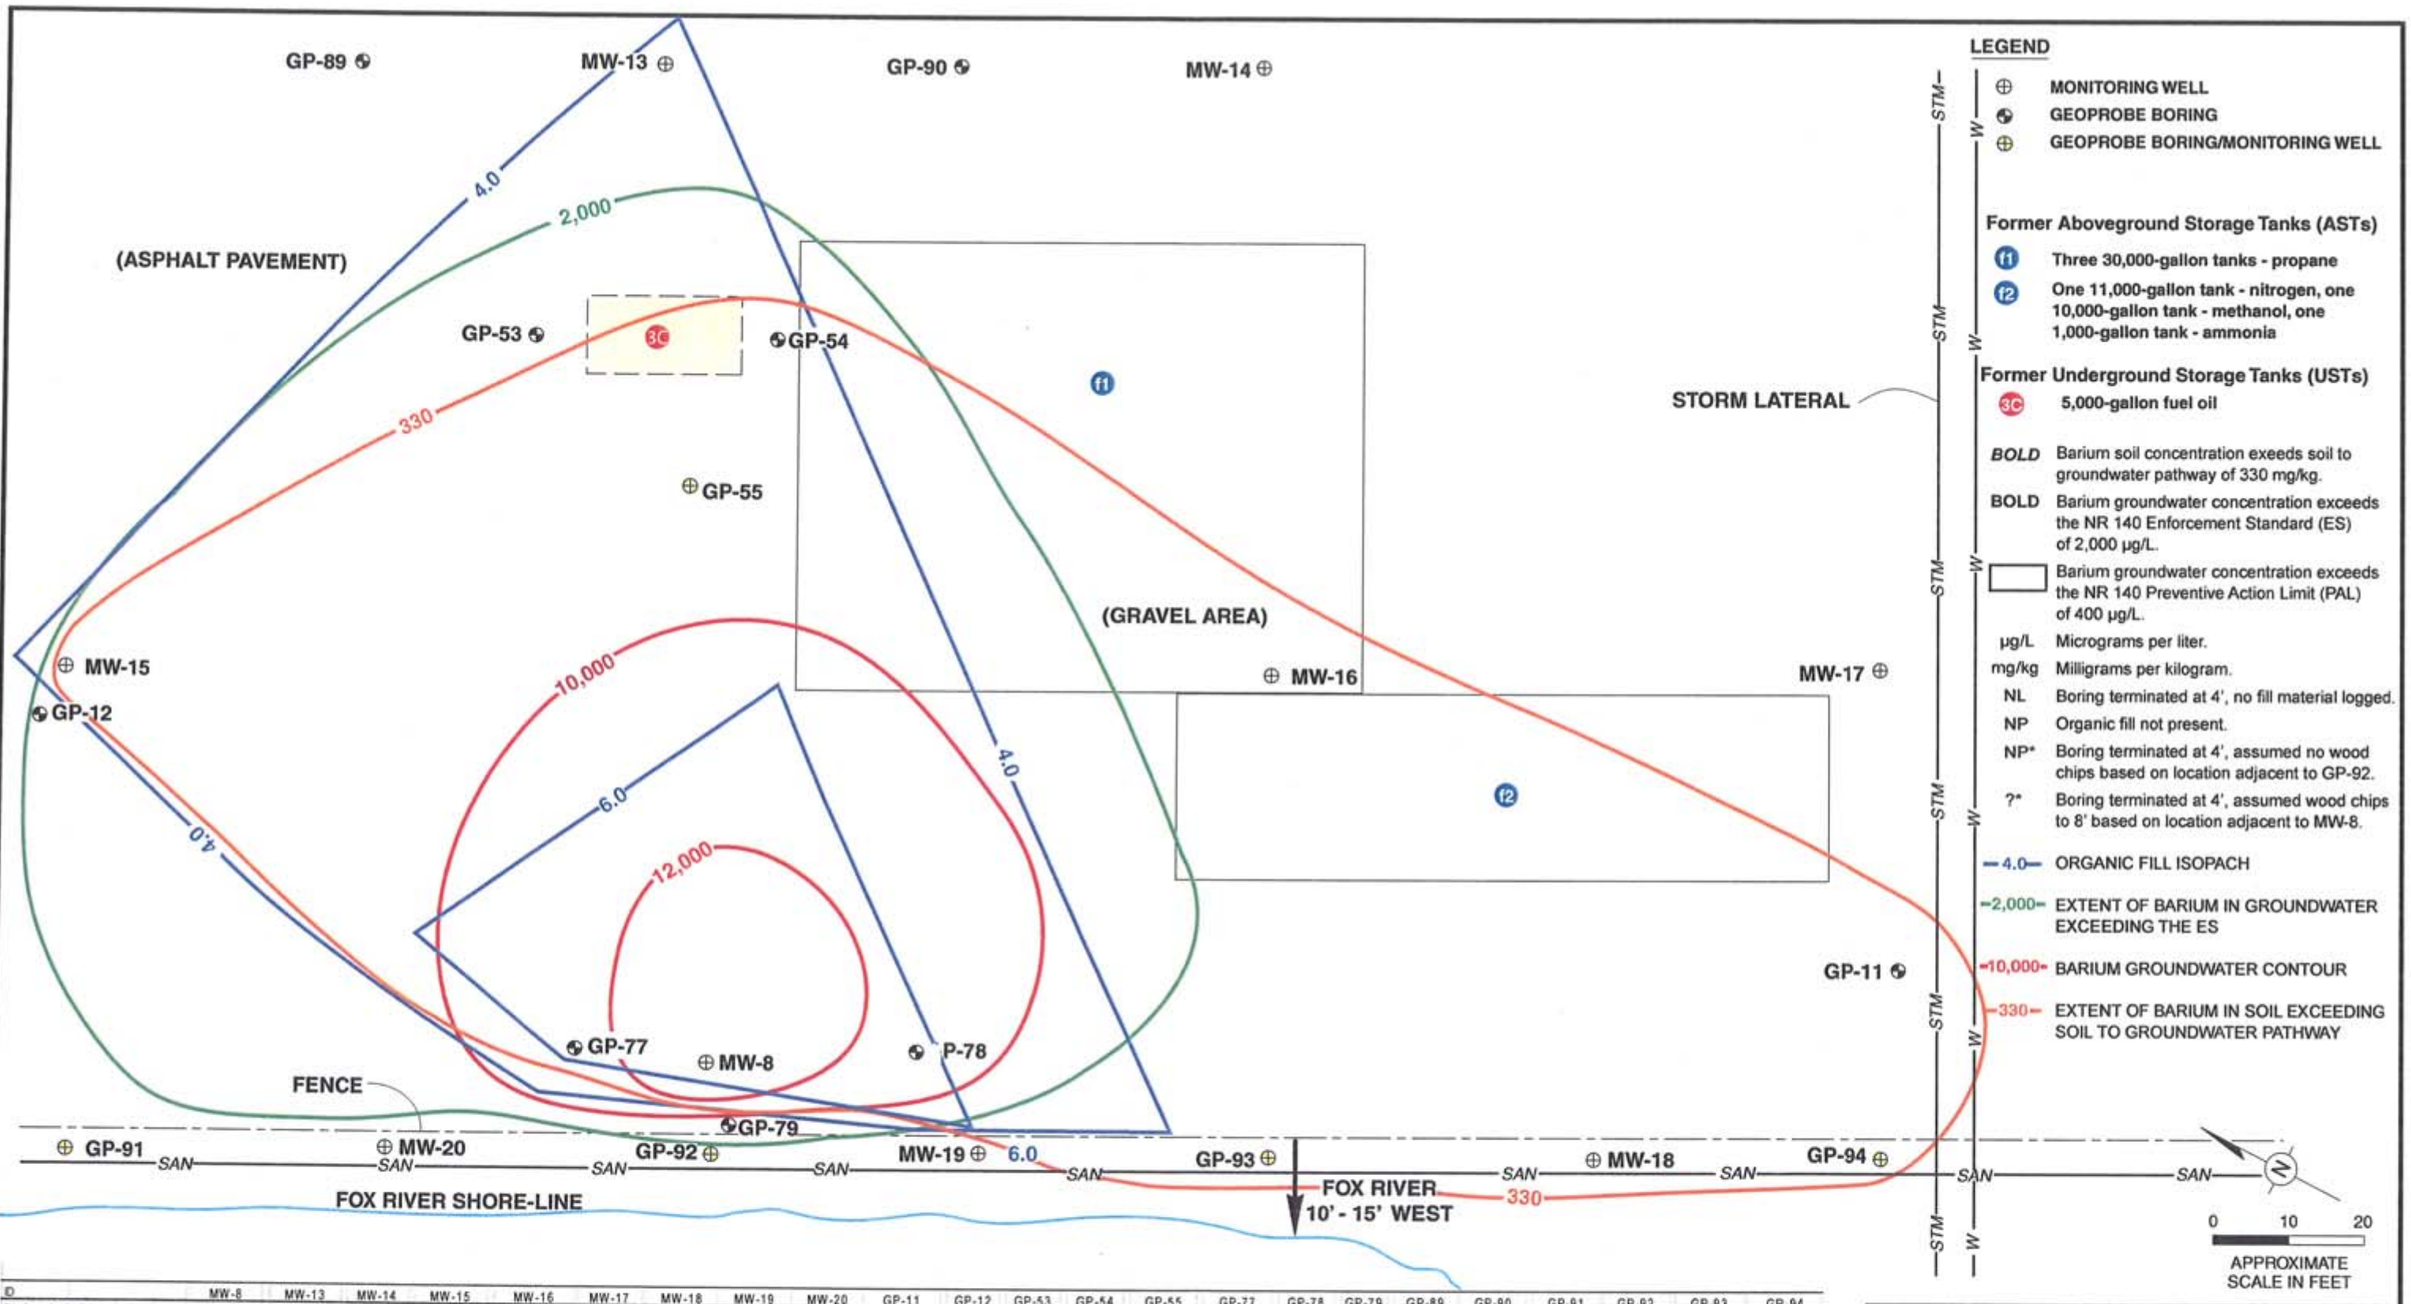

LEGEND

- MONITORING WELL
- GEOPROBE BORING
- GEOPROBE BORING/MONITORING WELL

Former Aboveground Storage Tanks (ASTs)

- f1 — Three 30,000-gallon tanks - propane
- f2 — One 11,000-gallon tank - nitrogen, one 10,000-gallon tank - methanol, one 1,000-gallon tank - ammonia

Former Underground Storage Tanks (USTs)

- 3C — 5,000-gallon fuel oil

- ***BOLD*** Barium soil concentration exeeds soil to groundwater pathway of 330 mg/kg.
- **BOLD** Barium groundwater concentration exceeds the NR 140 Enforcement Standard (ES) of 2,000 µg/L.
- Barium groundwater concentration exceeds the NR 140 Preventive Action Limit (PAL) of 400 µg/L.
- µg/L — Micrograms per liter.
- mg/kg — Milligrams per kilogram.
- NL — Boring terminated at 4', no fill material logged.
- NP — Organic fill not present.
- NP* — Boring terminated at 4', assumed no wood chips based on location adjacent to GP-92.
- ?* — Boring terminated at 4', assumed wood chips to 8' based on location adjacent to MW-8.
- 4.0 — ORGANIC FILL ISOPACH
- 2,000 — EXTENT OF BARIUM IN GROUNDWATER EXCEEDING THE ES
- 10,000 — BARIUM GROUNDWATER CONTOUR
- 330 — EXTENT OF BARIUM IN SOIL EXCEEDING SOIL TO GROUNDWATER PATHWAY

ID		MW-8	MW-13	MW-14	MW-15	MW-16	MW-17	MW-18	MW-19	MW-20	GP-11	GP-12	GP-53	GP-54	GP-55	GP-77	GP-78	GP-79	GP-89	GP-90	GP-91	GP-92	GP-93	GP-94
Barium in Soil (mg/kg)																								
Depth Interval	0-2'	--	--	--	--	--	--	100	--	--	--	--	110	62	--	--	--	--	--	--	--	--	--	470
	2-4'	***1,660***	190	65	***750***	110	88	--	83	22	***2,820***	--	140	***2,300***	--	***1,100***	***2,300***	58	110	110	59	12	12	--
	4-8'	--	130	0.27	***470***	***870***	54	***310***	100	13	--	--	--	--	--	--	--	--	100	54	99	6.3	***740****	77
	> 8'	--	59	59	38	68	56	--	--	--	--	209	--	--	--	--	--	--	--	--	6.4	14	55	17

	MW-8 11/20/2009	MW-13 11/19/2009	MW-15 11/20/2009	MW-16 11/19/2009	MW-18 11/19/2009	MW-19 11/19/2009	MW-20 11/19/2009	GP-55 11/20/2009	GP-91 11/19/2009	GP-92 11/19/2009	GP-93 11/19/2009
Barium in Groundwater (ug/L)											
Dissolved Barium	12,000	340	2,300	460	270	180	610	8,100	980	710	650
Total Barium	12,000	340	2,300	460	270	180	610	8,100	980	710	650
Methane in Groundwater (ug/L)	12,500	12,400	9,840	8,305	11,100	5,010	7,900	12,600	10,600	10,500	12,900
Fill Material											
Organic Fill Description	Wood chips, Sawdust	Wood chips, sand	Wood Chips, Peat	Wood chips in clay	Wood chips	Wood chips	NP	Wood chips	Wood chips in sand	NP	Wood chips
Fill Interval/Thickness	3-8'	4-8'	4-8.5'	5.5-8'	4-6'	3.5-6'	NP	4.5-8'	4-5.5'	NP	5-8'
Fill Thickness	5'	4'	4.5'	2.5'	2'	2.5'	NP	3.5'	1.5'	NP	3'

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

EXTENT OF FILL AND BARIUM IMPACTED SOIL AND GROUNDWATER AT REC 17

ARCADIS

FIGURE 26

01JULY10\ENVIRONMENT\BJM\MB
MERITOR\WI1016\OSHKOSH\GRAPHICS\BARIUM CON REC 17_389_0310_3.AI

CITY:MILWAUKEE DIV/GROUP:ENVIRONMENTAL DB: LD:(Opt) PIC:(Opt) PM:E. BUC TM:B. MAILLET LYR:(Opt)ON=*;OFF=*REF*
G:\Vaxjo\Meritor\WI01618\Oshkosh\mxd\MLHAPLVFig 1.dwg LAYOUT: 24 SAVED: 7/13/2010 12:18 PM ACADVER: 18.0S (LMS TECH) PAGESETUP: CANON-11X17 PLOTSTYLETABLE: BLACKGRAY.CTB PLOTTED: 7/13/2010 12:22 PM BY: SEPPANEN, MAIJA
XREFS: IMAGES: PROJECTNAME: ----
SITE BASE 082708_1.jpg
082708_2.jpg

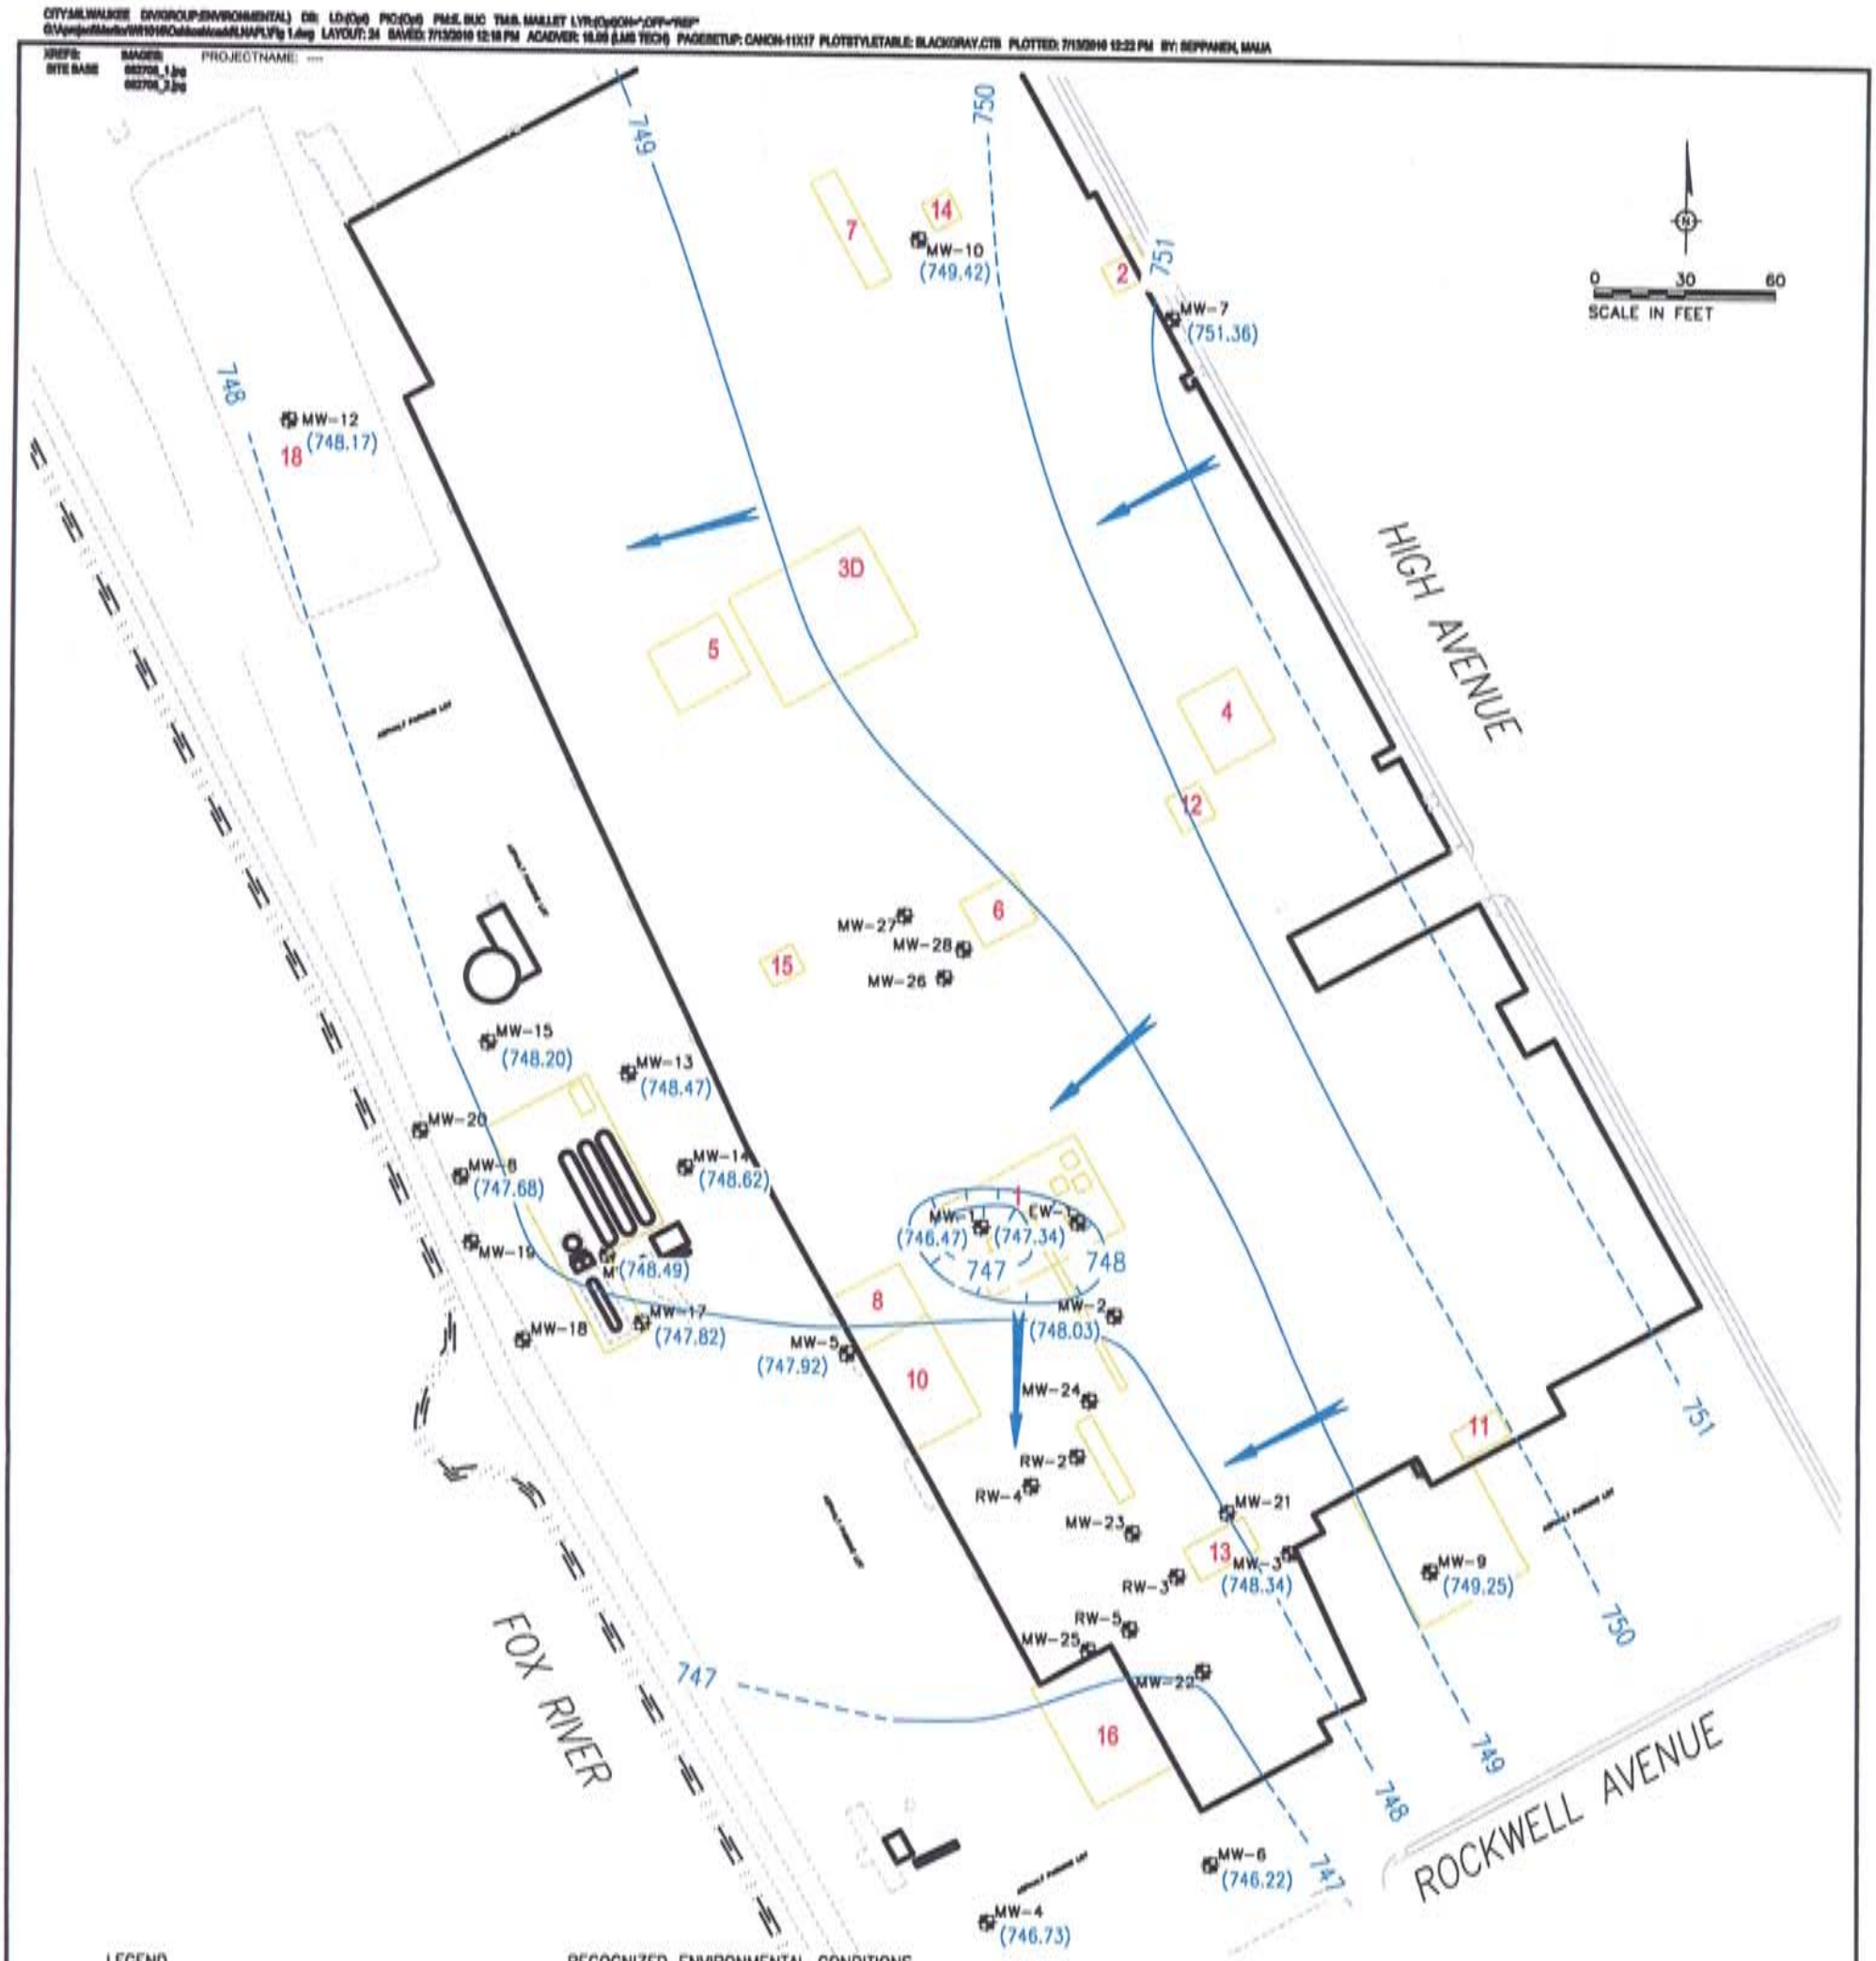

LEGEND

- MW-1 — MONITORING WELL
- (748.49) — MEASURED GROUNDWATER ELEVATION
- POTENTIOMETRIC SURFACE CONTOUR, DASHED WHERE INFERRED
- ESTIMATED DIRECTION OF GROUNDWATER FLOW

RECOGNIZED ENVIRONMENTAL CONDITIONS

1. HEAT TREATING AREA TUNNEL, QUENCH OIL TANKS AND PITS
2. ASSEMBLY AREA
3. REMOVED USTs
   - A FIVE 4,000-GALLON QUENCH OIL STORAGE
   - B ONE 2,000-GALLON WASTE OIL
   - C ONE 5,000-GALLON FUEL OIL
   - D FOUR 40-GALLON COOLANT
4. HORIZONTAL MACHINING CENTERS (HMCs)
5. VERTICAL TURNING LATHES (VTLs)
6. RADIAL DRILL COOLANT PIT
7. PAINT BOOTH AREA
8. FLAMMABLE LIQUIDS AND HAZARDOUS WASTE STORAGE AREA
9. BOILER ROOM
10. CHEMICAL AND UNIVERSAL WASTE STORAGE
11. COOLANT MIXING ROOM
12. AIR COMPRESSOR ROOM
13. SOUTHERN BROACHES
14. ELEVATOR PIT
15. EX-CELL-O VTL
16. OIL USTs
17. FILL MATERIAL
18. FORMER FINISHED PRODUCTS WAREHOUSE

NOTES

1. BASE MAP DEVELOPED FROM A DRAWING BY NATIONAL SURVEY & ENGINEERING TITLED, "MONITORING WELL EXHIBIT," DATED JUNE 15, 2006.

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

POTENTIOMETRIC SURFACE MAP MAY 2007

ARCADIS

FIGURE 24

GP-89
747.70
MW-13
747.70
GP-90
MW-14
(ASPHALT PAVEMENT)
GP-53
3C
GP-54
f1
STORM LATERAL
GP-55
(GRAVEL AREA)
747.64
MW-15
GP-12
747.61
MW-16
747.60
MW-17
747.50
747.40
f2
747.30
747.20
GP-11
GP-77
747.16
MW-8
GP-78
747.10
FENCE
GP-79
GP-91
MW-20
GP-92
MW-19
GP-93
MW-18
GP-94
SAN
FOX RIVER SHORE-LINE
FOX RIVER
10' - 15' WEST
STM
W

LEGEND

- MONITORING WELL
- GEOPROBE BORING
- GEOPROBE BORING/MONITORING WELL

Former Aboveground Storage Tanks (ASTs)

- f1 Three 30,000-gallon tanks - propane
- f2 One 11,000-gallon tank - nitrogen, one 10,000-gallon tank - methanol, one 1,000-gallon tank - ammonia

Former Underground Storage Tanks (USTs)

- 3C 5,000-gallon fuel oil

0 10 20
APPROXIMATE SCALE IN FEET

FORMER MERITOR FACILITY
1005 HIGH AVENUE
OSHKOSH, WISCONSIN

REC 17 GROUNDWATER ELEVATION CONTOURS AND FLOW DIRECTION NOVEMBER 19, 2009

ARCADIS

FIGURE 25

03AUG09-ENVIRONMENT-BJM
MERITORWM1016\OSHKOSH\GRAPHICS\BARIUM CON REC 17_349_0310.AI

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID Sample Date	NR 720 IND DC	NR 720 NON-IND DC	GW Pathway	GP-1 (10-12') 11/20/00	GP-2 (6-8') 11/20/00	GP-3 (4-6') 11/20/00	GP-4 (8-10') 11/20/00	GP-5 (4-6') 11/20/00	GP-6 (6-8') 11/20/00	GP-7 (6-8') 11/20/00
DRO (mg/kg)	--	--	100	<1.0	3.8 Q	37	26	47	<1.1	5.8
GRO (mg/kg)	--	--	100	0.8 Q	<0.65	<0.65	3.2	<0.65	1.1 Q	<0.65
VOCs (µg/kg)										
Benzene	--	--	5.5	<11	<13	<14	<13	<15	<11	<13
cis-1,2-Dichloroethene	--	--	--	<11	<13	<14	<13	<15	<11	<13
Ethylbenzene	--	--	2,900	<11	<13	<14	<14	<16	<11	<13
Isopropylbenzene	--	--	--	<13	<16	<17	<17	<19	<14	<16
Methylene Chloride	--	--	--	<45	<55	<58	<57	<64	<47	<54
Naphthalene	--	--	2,700	<31	<37	<39	<39	<43	<32	<37
n-Propylbenzene	--	--	--	<20	<25	<26	<26	<29	<21	<24
p-Isopropyltoluene	--	--	--	<30	<36	<38	<37	<42	<31	<35
sec-Butylbenzene	--	--	--	<20	<24	<25	<25	<28	<21	<24
Toluene	--	--	1,500	<6.3	13 Q	<8.0	51	31	<6.5	<7.5
1,2,4-Trimethylbenzene	--	--	--	<26	<32	<34	<33	<38	<27	<32
1,3,5-Trimethylbenzene	--	--	--	<20	<24	<25	<25	<28	<20	<24
Xylene, -o	--	--	--	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	--	--	--	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	--	--	4,100	<22	<27	<29	<28	<32	<23	<27
PAHs (µg/kg)										
Acenaphthene	--	900,000	38,000	NA	NA	NA	NA	NA	NA	NA
Acenaphthylene	--	18,000	700	NA	NA	NA	NA	NA	NA	NA
Anthracene	--	5,000,000	3,000,000	NA	NA	NA	NA	NA	NA	NA
Benzo (a) anthracene	--	88	17,000	NA	NA	NA	NA	NA	NA	NA
Benzo (a) pyrene	--	9	48,000	NA	NA	NA	NA	NA	NA	NA
Benzo (b) fluoranthene	--	88	360,000	NA	NA	NA	NA	NA	NA	NA
Benzo (g,h,i) perylene	--	1,800	6,800,000	NA	NA	NA	NA	NA	NA	NA
Benzo (k) fluoranthene	--	880	870,000	NA	NA	NA	NA	NA	NA	NA
Chrysene	--	8,800	37,000	NA	NA	NA	NA	NA	NA	NA
Dibenzo (a,h) anthracene	--	9	38,000	NA	NA	NA	NA	NA	NA	NA
Fluoranthene	--	600,000	500,000	NA	NA	NA	NA	NA	NA	NA
Fluorene	--	600,000	100,000	NA	NA	NA	NA	NA	NA	NA
Indeno (1,2,3-cd) pyrene	--	88	680,000	NA	NA	NA	NA	NA	NA	NA
1-Methylnaphthalene	--	1,100,000	23,000	NA	NA	NA	NA	NA	NA	NA

Footnotes on Page 2.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID Sample Date	NR 720 IND DC	NR 720 NON-IND DC	GW Pathway	GP-1 (10-12') 11/20/00	GP-2 (6-8') 11/20/00	GP-3 (4-6') 11/20/00	GP-4 (8-10') 11/20/00	GP-5 (4-6') 11/20/00	GP-6 (6-8') 11/20/00	GP-7 (6-8') 11/20/00
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	--	600,000	20,000	NA	NA	NA	NA	NA	NA	NA
Naphthalene	--	20,000	400	NA	NA	NA	NA	NA	NA	NA
Phenanthrene	--	18,000	1,800	NA	NA	NA	NA	NA	NA	NA
Pyrene	--	500,000	8,700,000	NA	NA	NA	NA	NA	NA	NA
Metals (mg/kg)										
Antimony	--	--	--	NA	NA	NA	NA	NA	NA	NA
Arsenic	1.6	0.039	--	NA	NA	NA	NA	NA	NA	NA
Barium	--	--	330	NA	NA	NA	NA	NA	NA	NA
Beryllium	--	--	--	NA	NA	NA	NA	NA	NA	NA
Cadmium	510	8	--	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	--	16,000	--	NA	NA	NA	NA	NA	NA	NA
Copper	--	--	--	NA	NA	NA	NA	NA	NA	NA
Lead	500	50	--	5.3 Q	22	**516**	23	21	2.4 Q	13
Mercury	--	--	--	NA	NA	NA	NA	NA	NA	NA
Nickel	--	--	--	NA	NA	NA	NA	NA	NA	NA
Selenium	--	--	--	NA	NA	NA	NA	NA	NA	NA
Silver	--	--	--	NA	NA	NA	NA	NA	NA	NA
Zinc	--	--	--	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-8 (4-6')	GP-9 (4-6')	GP-10 (4-6')	GP-11 (2-4')	GP-12 (8-10')	GP-13 (8-10')	GP-14 (8-10')	GP-15 (6-8')	GP-16 (8-10')	GP-17 (8-10')
Sample Date	11/20/00	11/20/00	11/21/00	11/21/00	11/21/00	11/21/00	11/21/00	11/22/00	11/22/00	11/22/00
DRO (mg/kg)	2,840	68	79	110	201	1,660	9,160	16,200	53	3.6 Q
GRO (mg/kg)	<0.65	86	<0.65	<0.65	<0.65	16	1.6 Q	<13	<0.65	<0.65
VOCs (µg/kg)										
Benzene	<29	<22	<34	<17	<26	<72	<67	<20	<13	<14
cis-1,2-Dichloroethene	<29	<22	<34	<17	<25	<72	<66	29 Q	<13	<14
Ethylbenzene	<30	<23	<35	<18	<26	<75	<69	<21	<14	<14
Isopropylbenzene	<36	<27	<42	<22	<32	<89	<82	<25	<17	<17
Methylene Chloride	<123	<93	<144	<74	<108	<305	<281	<86	<57	<59
Naphthalene	180 Q	<63	<98	165 Q	<73	10,300	1,570	88 Q	<39	<40
n-Propylbenzene	<55	<42	<65	<33	<49	<138	<127	<39	<26	<26
p-Isopropyltoluene	<80	<61	<94	<48	<71	<199	<183	<56	<37	<38
sec-Butylbenzene	<54	<41	<63	<32	<47	<134	<123	<38	<25	<26
Toluene	160	<13	<20	26 Q	<15	80 Q	65 Q	53	45	<8.1
1,2,4-Trimethylbenzene	<72	<54	<84	101 Q	<63	<178	<164	119 Q	<33	<34
1,3,5-Trimethylbenzene	<54	<41	<63	<32	<47	<133	<122	<37	<25	<26
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	<61	<46	<71	<36	<53	<151	<139	124 Q	<28	<29
PAHs (µg/kg)										
Acenaphthene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Acenaphthylene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Anthracene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzo (a) anthracene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzo (a) pyrene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzo (b) fluoranthene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzo (g,h,i) perylene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Benzo (k) fluoranthene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chrysene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Dibenzo (a,h) anthracene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Fluoranthene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Fluorene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Indeno (1,2,3-cd) pyrene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1-Methylnaphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Footnotes on Page 4.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-8 (4-6')	GP-9 (4-6')	GP-10 (4-6')	GP-11 (2-4')	GP-12 (8-10')	GP-13 (8-10')	GP-14 (8-10')	GP-15 (6-8')	GP-16 (8-10')	GP-17 (8-10')
Sample Date	**11/20/00**	**11/20/00**	**11/21/00**	**11/21/00**	**11/21/00**	**11/21/00**	**11/21/00**	**11/22/00**	**11/22/00**	**11/22/00**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Phenanthrene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Pyrene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	NA	**2.2 Q**	**5.1 Q**	NA	**4.2 Q**	NA	**2.0 Q**	NA
Barium	NA	NA	NA	2820	209	NA	313	NA	415	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	1.3 Q	1.9 Q	NA	0.71 Q	NA	0.59 Q	NA
Chromium, trivalent	NA	NA	NA	7.4	15	NA	45	NA	36	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	NA	14	50	132	81	21	18	145	26	18
Mercury	NA	NA	NA	<0.024	0.060 Q	NA	<0.018	NA	0.37	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	<0.091	<0.13	NA	0.16 Q	NA	0.16 Q	NA
Silver	NA	NA	NA	<0.48	<0.66	NA	<0.36	NA	<0.38	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-18 (8-10')	GP-19 (6-8')	GP-23 (4-6')	GP-24 (0-2')	GP-24 (6-8')	GP-25 (6-8')	GP-26 (6-8')	GP-27 (8-10')	GP-28 (0-2')	GP-28 (4-6')
Sample Date	11/22/00	11/22/00	01/14/02	01/14/02	01/14/02	01/14/02	01/14/02	01/14/02	01/14/02	01/14/02
DRO (mg/kg)	<1.1	3,990	NA	NA	<4.6	<5.2	2,900	<4.5	NA	<4.6
GRO (mg/kg)	<0.65	<0.65	NA	NA	<3.3	<3.4	<2.9	<2.8	NA	<3
VOCs (µg/kg)										
Benzene	<12	<12	<25	NA	<25	<25	<25	<25	NA	<25
cis-1,2-Dichloroethene	<12	<12	<25	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	<12	<12	<25	NA	<25	<25	<25	<25	NA	<25
Isopropylbenzene	<15	<15	<25	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	<51	<51	<25	NA	NA	NA	NA	NA	NA	NA
Naphthalene	<35	110 Q	<25	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	<23	<23	<25	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	<33	<33	<25	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	<22	<22	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	<7.1	20 Q	<25	NA	<25	<25	<25	<25	NA	<25
1,2,4-Trimethylbenzene	<30	32 Q	<25	NA	<25	<25	<25	<25	NA	<25
1,3,5-Trimethylbenzene	<22	<22	<25	NA	<25	<25	<25	<25	NA	<25
Xylene, -o	NA	NA	<25	NA	<25	<25	<25	<25	NA	<25
Xylenes, -m, -p	NA	NA	<25	NA	<25	<25	<25	<25	NA	<25
Xylenes, Total	<25	27 Q	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	NA	NA	<180	NA	<22	<22	<19	<19	NA	<20
Acenaphthylene	NA	NA	<160	NA	<17	<17	<14	<14	NA	<15
Anthracene	NA	NA	<140	NA	17 Q	<16	<14	<13	NA	<14
Benzo (a) anthracene	NA	NA	<190	NA	27 Q	<18	200	<15	NA	<16
Benzo (a) pyrene	NA	NA	<160	NA	23 Q	<17	100	<14	NA	<15
Benzo (b) fluoranthene	NA	NA	<250	NA	19 Q	<15	<13	<12	NA	<13
Benzo (g,h,i) perylene	NA	NA	<160	NA	16 Q	<15	<13	<13	NA	<14
Benzo (k) fluoranthene	NA	NA	<210	NA	22 Q	<17	15 Q	<15	NA	<16
Chrysene	NA	NA	<220	NA	25 Q	<18	230	<15	NA	<16
Dibenzo (a,h) anthracene	NA	NA	<130	NA	<15	<15	27 Q	<12	NA	<13
Fluoranthene	NA	NA	<240	NA	50	<14	17 Q	<12	NA	<13
Fluorene	NA	NA	<210	NA	17 Q	<17	<14	<14	NA	<15
Indeno (1,2,3-cd) pyrene	NA	NA	<160	NA	15 Q	<15	<13	<13	NA	<14
1-Methylnaphthalene	NA	NA	NA	NA	<19	<19	<16	<16	NA	<17

Footnotes on Page 6.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-18 (8-10')	GP-19 (6-8')	GP-23 (4-6')	GP-24 (0-2')	GP-24 (6-8')	GP-25 (6-8')	GP-26 (6-8')	GP-27 (8-10')	GP-28 (0-2')	GP-28 (4-6')
Sample Date	**11/22/00**	**11/22/00**	**01/14/02**	**01/14/02**	**01/14/02**	**01/14/02**	**01/14/02**	**01/14/02**	**01/14/02**	**01/14/02**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	NA	NA	<170	NA	<16	<16	<14	<13	NA	<14
Naphthalene	NA	NA	<180	NA	<23	<23	<20	<19	NA	<21
Phenanthrene	NA	NA	<140	NA	43 Q	<15	<13	<12	NA	<13
Pyrene	NA	NA	<240	NA	50 Q	<16	120	<13	NA	<14
Metals (mg/kg)										
Antimony	NA	NA	0.59 Q	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	**3.4**	**3.8**	NA	NA	NA	NA	**3.9**	NA
Barium	NA	NA	NA	110	NA	NA	NA	NA	150	NA
Beryllium	NA	NA	1.2	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	0.88	0.27	NA	NA	NA	NA	0.2	NA
Chromium, trivalent	NA	NA	37	36	NA	NA	NA	NA	40	NA
Copper	NA	NA	37	NA	NA	NA	NA	NA	NA	NA
Lead	13	9.9	28	60	NA	NA	NA	NA	17	NA
Mercury	NA	NA	0.042	<0.0062	NA	NA	NA	NA	0.046	NA
Nickel	NA	NA	26	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	1.1 Q	0.26 Q	NA	NA	NA	NA	0.26 Q	NA
Silver	NA	NA	<0.17	<0.096	NA	NA	NA	NA	<0.098	NA
Zinc	NA	NA	120	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-29 (0-2')	GP-29 (2-4')	GP-32 (0-2')	GP-32 (2-4')	GP-33 (0-2')	GP-33 (2-4')	GP-34 (0-2')	GP-34 (6-8')	GP-35 (8-10')	GP-36 (0-2')
Sample Date	01/14/02	01/14/02	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02
DRO (mg/kg)	NA	1,300	NA	3,200	NA	1,500	NA	82	1,900	NA
GRO (mg/kg)	NA	<2.9	NA	7.9	NA	5.3	NA	NA	<3.5	NA
VOCs (µg/kg)										
Benzene	NA	<25	NA	<25	NA	<25	NA	NA	<25	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	<25	NA	<25	NA	<25	NA	NA	<25	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	<25	NA	<25	NA	<25	NA	NA	<25	NA
1,2,4-Trimethylbenzene	NA	<25	NA	170	NA	57 Q	NA	NA	<25	NA
1,3,5-Trimethylbenzene	NA	<25	NA	150	NA	51 Q	NA	NA	<25	NA
Xylene, -o	NA	<25	NA	31 Q	NA	<25	NA	NA	<25	NA
Xylenes, -m, -p	NA	<25	NA	34 Q	NA	29 Q	NA	NA	<25	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	NA	<19	NA	<19	NA	<18	NA	<30	35 Q	NA
Acenaphthylene	NA	18 Q	NA	19 Q	NA	<13	NA	<23	47 Q	NA
Anthracene	NA	<14	NA	24 Q	NA	25 Q	NA	26 Q	110	NA
Benzo (a) anthracene	NA	25 Q	NA	120	NA	38 Q	NA	110	220	NA
Benzo (a) pyrene	NA	<14	NA	120	NA	50	NA	130	170	NA
Benzo (b) fluoranthene	NA	<13	NA	99	NA	35 Q	NA	110	200	NA
Benzo (g,h,i) perylene	NA	<13	NA	88	NA	21 Q	NA	70	100	NA
Benzo (k) fluoranthene	NA	<15	NA	120	NA	31 Q	NA	110	220	NA
Chrysene	NA	56	NA	260	NA	120	NA	120	230	NA
Dibenzo (a,h) anthracene	NA	<13	NA	40 Q	NA	<12	NA	21 Q	38 Q	NA
Fluoranthene	NA	<12	NA	170	NA	76	NA	250	560	NA
Fluorene	NA	<14	NA	31 Q	NA	17 Q	NA	<23	87	NA
Indeno (1,2,3-cd) pyrene	NA	<13	NA	82	NA	20 Q	NA	82	130	NA
1-Methylnaphthalene	NA	<16	NA	84	NA	46 Q	NA	<26	42 Q	NA

Footnotes on Page 8.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-29 (0-2')	GP-29 (2-4')	GP-32 (0-2')	GP-32 (2-4')	GP-33 (0-2')	GP-33 (2-4')	GP-34 (0-2')	GP-34 (6-8')	GP-35 (8-10')	GP-36 (0-2')
Sample Date	**01/14/02**	**01/14/02**	**01/15/02**	**01/15/02**	**01/15/02**	**01/15/02**	**01/15/02**	**01/15/02**	**01/15/02**	**01/15/02**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	NA	<14	NA	120	NA	67	NA	<22	58	NA
Naphthalene	NA	<20	NA	180	NA	35 Q	NA	<31	<24	NA
Phenanthrene	NA	<13	NA	250	NA	140	NA	190	630	NA
Pyrene	NA	170	NA	260	NA	150	NA	230	590	NA
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**4.7**	NA	0.49 Q	NA	0.53 Q	NA	**2.2**	NA	**4.9**	**5**
Barium	170	NA	16	NA	30	NA	520	NA	210	1,800
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.26	NA	0.12 Q	NA	<0.054	NA	0.099 Q	NA	0.57	0.22
Chromium, trivalent	43	NA	3.7	NA	4	NA	32	NA	49	66
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	25	NA	1.9	NA	1.4	NA	19	NA	23	77
Mercury	0.03	NA	<0.0056	NA	0.021	NA	0.23	NA	0.059	0.19
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	0.52 Q	NA	<0.22	NA	<0.22	NA	<0.23	NA	0.36 Q	0.53 Q
Silver	<0.1	NA	0.3	NA	<0.086	NA	0.10 Q	NA	<0.11	0.20 Q
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-36 (6-8')	GP-37 (0-2')	GP-37 (6-8')	GP-38 (8-10')	GP-39 (6-8')	GP-40 (6-8')	GP-41 (0-2')	GP-41 (8-10')	GP-42 (0-2')	GP-42 (6-8')
Sample Date	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02	01/16/02	01/16/02	01/16/02	01/16/02	01/16/02
DRO (mg/kg)	49	NA	340	1,200	NA	450	NA	6.4	NA	340
GRO (mg/kg)	NA	NA	NA	<3.1	NA	3.5	NA	<3.9	NA	11
VOCs (µg/kg)										
Benzene	NA	NA	NA	<25	<25	<25	NA	<25	NA	<25
cis-1,2-Dichloroethene	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	<25	<25	<25	NA	<25	NA	120
Isopropylbenzene	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	<25	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	<25	<25	<25	NA	<25	NA	<25
1,2,4-Trimethylbenzene	NA	NA	NA	<25	<25	<25	NA	<25	NA	99 Q
1,3,5-Trimethylbenzene	NA	NA	NA	<25	<25	<25	NA	<25	NA	76 Q
Xylene, -o	NA	NA	NA	<25	<25	<25	NA	<25	NA	87 Q
Xylenes, -m, -p	NA	NA	NA	<25	<25	<25	NA	<25	NA	240
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<83	NA	520	23 Q	<53	<19	NA	<26	NA	13,000
Acenaphthylene	<63	NA	240 Q	<16	48 Q	<15	NA	<19	NA	2,200 Q
Anthracene	<61	NA	530	26 Q	100 Q	<14	NA	25 Q	NA	22,000
Benzo (a) anthracene	200 Q	NA	2,500	26 Q	260	<16	NA	<21	NA	27,000
Benzo (a) pyrene	240	NA	2,600	24 Q	290	<15	NA	<19	NA	28,000
Benzo (b) fluoranthene	240	NA	2,200	43 Q	240	<13	NA	<17	NA	21,000
Benzo (g,h,i) perylene	150 Q	NA	1,200	25 Q	150	<13	NA	<18	NA	14,000
Benzo (k) fluoranthene	190 Q	NA	2,200	36 Q	230	<15	NA	<20	NA	20,000
Chrysene	230	NA	2,500	60	540 Q	40 Q	NA	<21	NA	24,000
Dibenzo (a,h) anthracene	<56	NA	380	19 Q	<190	<13	NA	<17	NA	5,000
Fluoranthene	470	NA	5,500	50	630	<12	NA	<16	NA	74,000
Fluorene	<63	NA	280	50 Q	<40	<15	NA	<19	NA	15,000
Indeno (1,2,3-cd) pyrene	170 Q	NA	1,300	24 Q	320 Q	<13	NA	<18	NA	15,000
1-Methylnaphthalene	<71	NA	130 Q	43 Q	65 Q	<16	NA	<22	NA	3,500 Q

Footnotes on Page 10.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-36 (6-8')	GP-37 (0-2')	GP-37 (6-8')	GP-38 (8-10')	GP-39 (6-8')	GP-40 (6-8')	GP-41 (0-2')	GP-41 (8-10')	GP-42 (0-2')	GP-42 (6-8')
Sample Date	01/15/02	01/15/02	01/15/02	01/15/02	01/15/02	01/16/02	01/16/02	01/16/02	01/16/02	01/16/02
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	<61	NA	150 Q	62	77 Q	<14	NA	<19	NA	5,400
Naphthalene	<86	NA	290 Q	<21	110 Q	<20	NA	<26	NA	9,800
Phenanthrene	360	NA	3,900	230	490	<13	NA	<17	NA	89,000
Pyrene	440	NA	4,700	150	570	18 Q	NA	21 Q	NA	54,000
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	0.52 Q	NA	**3.6**	NA	NA	**4.9**	NA	**2.2**	NA
Barium	NA	47	NA	200	NA	NA	14	NA	22	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	<0.055	NA	0.23	NA	NA	0.091 Q	NA	0.089 Q	NA
Chromium, trivalent	NA	3.4	NA	44	NA	NA	15	NA	7.3	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	NA	1.2	NA	13	NA	NA	14	NA	7.2	NA
Mercury	NA	<0.0057	NA	0.019 Q	NA	NA	0.0067 Q	NA	<0.0054	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	<0.22	NA	0.29 Q	NA	NA	0.34 Q	NA	0.34 Q	NA
Silver	NA	<0.088	NA	<0.1	NA	NA	<0.081	NA	<0.084	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-43 (6-8')	GP-44 (0-4')	GP-45 (2-4')	GP-45 (6-8')	GP-46 (0-2')	GP-46 (2-4')	GP-47 (4-6')	GP-47 (6-8')	GP-48 (2-4')	GP-48 (4-6')
Sample Date	01/16/02	01/16/02	04/19/06	04/19/06	04/18/06	04/18/06	04/20/06	04/20/06	04/18/06	04/18/06
DRO (mg/kg)	3,000	3.9	NA	3,300	NA	NA	NA	NA	NA	11,000
GRO (mg/kg)	<5.2	<2.7	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	<25	<25	NA	<43	NA	<27	NA	<34	NA	<32
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	<25	<25	NA	<43	NA	<27	NA	<34	NA	<32
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	<25	<25	NA	<43	NA	<27	NA	<34	NA	<32
1,2,4-Trimethylbenzene	<25	<25	NA	<43	NA	<27	NA	<34	NA	<32
1,3,5-Trimethylbenzene	<25	<25	NA	<43	NA	<27	NA	<34	NA	<32
Xylene, -o	<25	<25	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	<25	<25	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	<130	NA	<80	NA	<100	NA	<96
PAHs (µg/kg)										
Acenaphthene	46 Q	<18	NA	<220	NA	<53	NA	<170	NA	<960
Acenaphthylene	48 Q	<13	NA	<370	NA	<90	NA	<290	NA	<1,600
Anthracene	240	<13	NA	<22	NA	<5.3	NA	43	NA	300
Benzo (a) anthracene	290	<15	NA	<22	NA	17	NA	130	NA	2,000
Benzo (a) pyrene	540	<13	NA	<22	NA	26	NA	<17	NA	420
Benzo (b) fluoranthene	370	<12	NA	<22	NA	16	NA	49	NA	380
Benzo (g,h,i) perylene	210	<12	NA	<22	NA	16	NA	<17	NA	300
Benzo (k) fluoranthene	380	<14	NA	<22	NA	21	NA	<17	NA	110
Chrysene	510	<15	NA	<22	NA	14	NA	93	NA	660
Dibenzo (a,h) anthracene	140	13 Q	NA	<32	NA	<8.0	NA	<26	NA	<140
Fluoranthene	920	<11	NA	<43	NA	32	NA	860	NA	3,100
Fluorene	110	<13	NA	<43	NA	<11	NA	51	NA	250
Indeno (1,2,3-cd) pyrene	260	14 Q	NA	<22	NA	16	NA	<17	NA	210
1-Methylnaphthalene	75 Q	<15	NA	<130	NA	<32	NA	<100	NA	<580

Footnotes on Page 12.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-43 (6-8')	GP-44 (0-4')	GP-45 (2-4')	GP-45 (6-8')	GP-46 (0-2')	GP-46 (2-4')	GP-47 (4-6')	GP-47 (6-8')	GP-48 (2-4')	GP-48 (4-6')
Sample Date	**01/16/02**	**01/16/02**	**04/19/06**	**04/19/06**	**04/18/06**	**04/18/06**	**04/20/06**	**04/20/06**	**04/18/06**	**04/18/06**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	92	<13	NA	<110	NA	<27	NA	<86	NA	980
Naphthalene	58 Q	<18	NA	<130	NA	<32	NA	<100	NA	<580
Phenanthrene	520	<12	NA	<22	NA	18	NA	250	NA	1,300
Pyrene	1,000	<13	NA	<22	NA	26	NA	81	NA	450
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**7.4**	**1.9**	**8.6**	**<3.8**	**3.4**	**4.2**	**8.9**	**3.1**	**7.6**	**7.8**
Barium	140	16	290	89	13 B	63 B	260	150	1300	590
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.53	0.070 Q	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	29	7.5	12	20	4.3	6.1	21	28	19	14
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	130	4.3	140	32	6.8	19	230	18	88	**520**
Mercury	0.16	<0.0056	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	1.0 Q	<0.22	NA	NA	NA	NA	NA	NA	NA	NA
Silver	0.37 Q	<0.087	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-49 (0-2')	GP-49 (4-6')	GP-50 (0-2')	GP-50 (4-6')	GP-51 (0-2')	GP-51 (2-4')	GP-52 (0-2')	GP-52 (2-4')	GP-53 (0-2')	GP-53 (2-4')
Sample Date	04/19/06	04/19/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06
DRO (mg/kg)	NA	3,300	NA	NA	NA	NA	NA	NA	NA	6,300
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	<36	NA	NA	NA	NA	NA	NA	NA	<28 QU
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	<36	NA	NA	NA	NA	NA	NA	NA	<660 QU,RL1
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	<36	NA	NA	NA	NA	NA	NA	NA	38 QU
1,2,4-Trimethylbenzene	NA	43	NA	NA	NA	NA	NA	NA	NA	400 QU
1,3,5-Trimethylbenzene	NA	<36	NA	NA	NA	NA	NA	NA	NA	<28 QU
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	<110	NA	NA	NA	NA	NA	NA	NA	300 QU
PAHs (µg/kg)										
Acenaphthene	NA	<360	<2,200	<70	<2,200	<350	<990	<1,700	NA	690
Acenaphthylene	NA	<620	<3,700	<120	<3,700	<590	<1,700	<2,900	NA	<950
Anthracene	NA	310	<220	26	260	380	<99	380	NA	1,400
Benzo (a) anthracene	NA	1,200	600	49	1,000	950	870	1,100	NA	4,300
Benzo (a) pyrene	NA	650	550	43	1,100	930	<99	1,000	NA	110
Benzo (b) fluoranthene	NA	490	<220	30	370	580	<99	850	NA	150
Benzo (g,h,i) perylene	NA	420	620	29	580	590	<99	830	NA	100
Benzo (k) fluoranthene	NA	290	300	18	380	440	<99	530	NA	97
Chrysene	NA	400	270	36	620	790	260	940	NA	1,400
Dibenzo (a,h) anthracene	NA	110	<330	<11	<320	96	<150	<260	NA	<84
Fluoranthene	NA	2,600	1,200	130	2,200	2700	410	2,600	NA	7,100
Fluorene	NA	190	<430	<14	<430	140	<200	<340	NA	2,100
Indeno (1,2,3-cd) pyrene	NA	420	260	30	560	580	<99	770	NA	68
1-Methylnaphthalene	NA	230	<1,300	<42	<1,300	<210	<600	<1,000	NA	9,900

Footnotes on Page 14.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-49 (0-2')	GP-49 (4-6')	GP-50 (0-2')	GP-50 (4-6')	GP-51 (0-2')	GP-51 (2-4')	GP-52 (0-2')	GP-52 (2-4')	GP-53 (0-2')	GP-53 (2-4')
Sample Date	04/19/06	04/19/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	NA	760	<1,100	<35	<1,100	830	<500	1,400	NA	13,000
Naphthalene	NA	310	<1,300	<42	<1,300	<210	<600	<1,000	NA	2,500
Phenanthrene	NA	1,100	670	87	970	1,400	190	1,700	NA	5,300
Pyrene	NA	500	350	49	1,300	1,700	1,000	1,600	NA	4,000
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**7.3**	**4.7**	**13**	**5.3**	**7.2**	**15**	**20**	**4.9**	**5.5**	**4.2**
Barium	8.6	380	330 B	80 B	30 B	400 B	500 B	250 B	110 B	140 B
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	6.6	11	9.8	11	4.1	16	250	12	9.7	11
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	15	250	**1,000**	340	190	**1,700**	**1,000**	240	38	32
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-54 (0-2')	GP-54 (2-4')	GP-56 (4-6')	GP-56 (6-8')	GP-57 (0-2')	GP-58 (2-4')	GP-58 (4-6')	GP-59 (2-4')	GP-59 (4-5')	GP-60 (0-2')
Sample Date	04/18/06	04/18/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06
DRO (mg/kg)	NA	17,000	NA	NA	NA	NA	NA	NA	NA	2,100
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	<500 QU	NA	<34	<31	NA	<34	<27 QU	NA	<31 QU
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	<500 QU	NA	350	<31	NA	42	140 QU	NA	<160 QU,RL1
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	5,900 QU	NA	NA	NA	NA	NA	NA	NA	<3,200 QU,RL1
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	<500 QU	NA	<34	<31	NA	<34	<27 QU	NA	<31 QU
1,2,4-Trimethylbenzene	NA	1,200 QU	NA	2,000	37	NA	59	320 QU	NA	260 QU
1,3,5-Trimethylbenzene	NA	700 QU	NA	490	<31	NA	<34	51 QU	NA	110 QU
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	<1,500 QU	NA	270	<92	NA	<100	180 QU	NA	<93 QU
PAHs (µg/kg)										
Acenaphthene	NA	NA	NA	350	<150	NA	<170	<130	NA	NA
Acenaphthylene	NA	NA	NA	<290	<260	NA	<290	<230	NA	NA
Anthracene	NA	NA	NA	400	90	NA	<17	48	NA	NA
Benzo (a) anthracene	NA	NA	NA	440	1,400	NA	200	<13	NA	NA
Benzo (a) pyrene	NA	NA	NA	<17	120	NA	44	<13	NA	NA
Benzo (b) fluoranthene	NA	NA	NA	<17	<15	NA	52	<13	NA	NA
Benzo (g,h,i) perylene	NA	NA	NA	<17	<15	NA	52	<13	NA	NA
Benzo (k) fluoranthene	NA	NA	NA	<17	86	NA	<17	<13	NA	NA
Chrysene	NA	NA	NA	<17	140	NA	31	<13	NA	NA
Dibenzo (a,h) anthracene	NA	NA	NA	<26	<23	NA	<26	<20	NA	NA
Fluoranthene	NA	NA	NA	3,500	400	NA	140	260	NA	NA
Fluorene	NA	NA	NA	480	<31	NA	<34	<27	NA	NA
Indeno (1,2,3-cd) pyrene	NA	NA	NA	<17	<15	NA	51	<13	NA	NA
1-Methylnaphthalene	NA	NA	NA	410	<92	NA	<100	<81	NA	NA

Footnotes on Page 16.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-54 (0-2')	GP-54 (2-4')	GP-56 (4-6')	GP-56 (6-8')	GP-57 (0-2')	GP-58 (2-4')	GP-58 (4-6')	GP-59 (2-4')	GP-59 (4-5')	GP-60 (0-2')
Sample Date	04/18/06	04/18/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06	04/20/06
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	NA	NA	NA	1,500	<76	NA	<86	<67	NA	NA
Naphthalene	NA	NA	NA	200	<92	NA	<100	<81	NA	NA
Phenanthrene	NA	NA	NA	1,800	180	NA	81	110	NA	NA
Pyrene	NA	NA	NA	470	200	NA	30	56	NA	NA
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**5.1**	**31**	**7.2**	**14**	**<2.7**	**2.5**	**4.3**	**15**	**4.3**	**4.7**
Barium	6.2 B	2,300 B	170	180	8.1	110	2,000	46	33	69
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	3.4	310	32	39	2.8	7.2	38	96	28	19
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	13	**1,400**	9.9	8.3	8	9.9	45	59	24	7.2
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-61 (4-6')	GP-62 (2-4')	GP-62 (4-6')	GP-63 (2-4')	GP-63 (4-6')	GP-64 (2-4')	GP-64 (8-10')	GP-65 (0-2')	GP-65 (4-6')	GP-66 (0-2')
Sample Date	04/20/06	04/21/06	04/21/06	04/19/06	04/19/06	04/19/06	04/19/06	04/20/06	04/20/06	04/18/06
DRO (mg/kg)	NA	NA	150	NA	15,000	NA	3,200	NA	910	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	<29	200	<28	NA	<35 QU	NA	<32	NA	<34	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	<29	210	<28	NA	92 QU	NA	210	NA	<34	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	<29	160	<28	NA	<35 QU	NA	<32	NA	<34	NA
1,2,4-Trimethylbenzene	<29	98	<28	NA	91 QU	NA	41	NA	83	NA
1,3,5-Trimethylbenzene	<29	<31	<28	NA	<35 QU	NA	<32	NA	<34	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	<88	360	<83	NA	110 QU	NA	<97	NA	<100	NA
PAHs (µg/kg)										
Acenaphthene	<59	<150	<140	<54	<1,200	<2,100	<65	<130	<170	100
Acenaphthylene	<100	<260	<230	<92	<2,100	<3,600	<110	<220	<290	<90
Anthracene	<5.9	36	29	<5.4	280	2,600	16	<13	23	130
Benzo (a) anthracene	<5.9	140	150	<5.4	4,500	3,500	70	<13	<17	360
Benzo (a) pyrene	<5.9	120	160	<5.4	<120	1,800	16	<13	<17	340
Benzo (b) fluoranthene	<5.9	79	120	<5.4	1,400	1,300	12	<13	<17	330
Benzo (g,h,i) perylene	<5.9	89	120	<5.4	<120	830	<6.5	<13	<17	250
Benzo (k) fluoranthene	<5.9	56	84	<5.4	420	460	8.9	<13	<17	170
Chrysene	<5.9	110	140	<5.4	950	2,400	32	<13	<17	310
Dibenzo (a,h) anthracene	<8.8	<23	21	<8.1	<190	<320	<9.7	<20	<26	44
Fluoranthene	<12	330	360	<11	3,300	12,000	140	<26	280	870
Fluorene	<12	<31	<28	<11	530	3,000	23	<26	<34	49
Indeno (1,2,3-cd) pyrene	<5.9	80	120	<5.4	<120	660	6.7	<13	<17	260
1-Methylnaphthalene	<35	<93	<83	<33	<740	2,100	<39	<79	<100	60

Footnotes on Page 18.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-61 (4-6')	GP-62 (2-4')	GP-62 (4-6')	GP-63 (2-4')	GP-63 (4-6')	GP-64 (2-4')	GP-64 (8-10')	GP-65 (0-2')	GP-65 (4-6')	GP-66 (0-2')
Sample Date	**04/20/06**	**04/21/06**	**04/21/06**	**04/19/06**	**04/19/06**	**04/19/06**	**04/19/06**	**04/20/06**	**04/20/06**	**04/18/06**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	<29	<77	<69	<27	1,200	9,400	85	<66	<86	380
Naphthalene	<35	<93	<83	<33	<740	2,100	<39	<79	<100	<32
Phenanthrene	<5.9	260	150	<5.4	510	13,000	180	<13	75	540
Pyrene	<5.9	200	290	<5.4	1,100	5,600	35	<13	79	560
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**4.7**	**10**	**6.1**	NA	**5**	NA	**6.2**	NA	**3.4**	**7.6**
Barium	66	160	73	NA	1,000	NA	190	NA	130	60
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	17	48	11	NA	22	NA	35	NA	18	25
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	8	36	27	NA	120	NA	9.5	NA	9.2	19
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-66 (4-6')	GP-67 (0-2')	GP-67 (4-6')	GP-68 (0-2')	GP-68 (4-6')	GP-69 (0-2')	GP-70 (0-2')	GP-71 (0-2')	GP-71 (4-6')	GP-72 (2-4')
Sample Date	04/18/06	04/18/06	04/18/06	04/18/06	04/18/06	04/20/06	04/20/06	04/18/06	04/18/06	04/19/06
DRO (mg/kg)	NA	NA	NA	NA	NA	690	2,500	NA	1,700	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	<31	<27	NA	130	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	<31	<27	NA	<6,200 RL1	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	<31	39	NA	1,200	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	<31	45	NA	680	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	<31	<27	NA	<34	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	<93	<80	NA	<1,400 RL1	NA
PAHs (µg/kg)										
Acenaphthene	<310	<550	<130	<790	<420	<150	<270	<53	<67	<140
Acenaphthylene	<520	<940	<230	<1,300	<720	<260	<450	<90	<110	<230
Anthracene	47	86	<13	98	120	<15	<27	<5.3	7.1	16
Benzo (a) anthracene	150	490	<13	540	360	60	<27	<5.3	340	56
Benzo (a) pyrene	96	480	<13	550	350	71	<27	<5.3	300	57
Benzo (b) fluoranthene	78	370	<13	450	300	61	<27	<5.3	190	43
Benzo (g,h,i) perylene	91	510	<13	590	270	54	<27	<5.3	200	47
Benzo (k) fluoranthene	46	230	<13	310	200	41	<27	<5.3	79	29
Chrysene	100	390	<13	410	280	65	<27	<5.3	200	47
Dibenzo (a,h) anthracene	<46	<83	<20	140	<63	<23	<40	<8.0	38	<20
Fluoranthene	390	910	<27	990	770	170	<53	<11	510	130
Fluorene	<61	<110	<27	<160	<85	<31	<53	<11	23	<27
Indeno (1,2,3-cd) pyrene	71	460	<13	560	290	66	<27	<5.3	190	46
1-Methylnaphthalene	240	<330	<80	<470	<250	<93	<160	<32	81	<82

Footnotes on Page 20.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-66 (4-6')	GP-67 (0-2')	GP-67 (4-6')	GP-68 (0-2')	GP-68 (4-6')	GP-69 (0-2')	GP-70 (0-2')	GP-71 (0-2')	GP-71 (4-6')	GP-72 (2-4')
Sample Date	**04/18/06**	**04/18/06**	**04/18/06**	**04/18/06**	**04/18/06**	**04/20/06**	**04/20/06**	**04/18/06**	**04/18/06**	**04/19/06**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	550	780	<67	<390	490	<77	<130	<27	270	<68
Naphthalene	300	<330	<80	<470	<250	<93	<160	<32	100	<82
Phenanthrene	290	460	16	410	440	110	<27	<5.3	240	100
Pyrene	99	580	<13	640	540	160	<27	<5.3	310	85
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**5.2**	**12**	**<2.9**	**7.1**	**12**	**9.3**	**14**	NA	**9.4**	NA
Barium	1,100	58 B	110 B	9.6 B	140 B	79	39	NA	160	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	11	11	22	15	58	89	14	NA	8.7	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	290	52	7.5	29	59	230	150	NA	460	NA
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-72 (6-8')	GP-73 (0-2')	GP-73 (2-4')	GP-74 (0-2')	GP-74 (2-4')	GP-75 (0-2')	GP-75 (4-6')	GP-76 (2-4')	GP-76 (4-6')	GP-77 (2-4')
Sample Date	04/19/06	04/21/06	04/21/06	04/21/06	04/21/06	04/21/06	04/21/06	04/19/06	04/19/06	04/18/06
DRO (mg/kg)	4,100	NA	380	NA	1,400	NA	66	NA	3,300	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	<41	NA	<28	NA	<27	NA	<59	<67	<49	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	<41	NA	<28	NA	<27	NA	<59	<67	<49	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	<41	NA	<28	NA	<27	NA	<59	<67	<49	NA
1,2,4-Trimethylbenzene	<41	NA	<28	NA	32	NA	<59	<67	<49	NA
1,3,5-Trimethylbenzene	<41	NA	<28	NA	<27	NA	<59	<67	<49	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	<120	NA	<84	NA	<81	NA	<180	<200	<150	NA
PAHs (µg/kg)										
Acenaphthene	<200	<140	<1,700	<57	<540	170	<120	<280	<1,200	<4,300
Acenaphthylene	<340	<230	<3,000	<97	<920	<94	<200	<470	<2,100	<7,300
Anthracene	130	<14	<170	20	390	250	40	110	570	5,800
Benzo (a) anthracene	570	<14	510	79	1,200	440	130	190	1,500	13,000
Benzo (a) pyrene	460	<14	560	65	1,000	400	94	170	1,400	15,000
Benzo (b) fluoranthene	330	<14	490	55	730	290	75	120	1,000	9,800
Benzo (g,h,i) perylene	340	<14	790	51	720	230	71	120	910	12,000
Benzo (k) fluoranthene	250	<14	<170	28	500	150	79	93	850	7,400
Chrysene	350	<14	460	59	910	350	98	180	1,400	11,000
Dibenzo (a,h) anthracene	58	<20	<260	8.7	140	51	<18	<42	<180	1,800
Fluoranthene	1100	<27	1,300	150	3,000	1,000	300	590	4,400	32,000
Fluorene	78	<27	<350	<11	240	130	<24	<56	<240	2,900
Indeno (1,2,3-cd) pyrene	350	<14	440	51	640	240	75	120	1,000	9,700
1-Methylnaphthalene	<120	<82	<1,000	<34	<330	51	<71	<170	<730	<2,600

Footnotes on Page 22.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-72 (6-8')	GP-73 (0-2')	GP-73 (2-4')	GP-74 (0-2')	GP-74 (2-4')	GP-75 (0-2')	GP-75 (4-6')	GP-76 (2-4')	GP-76 (4-6')	GP-77 (2-4')
Sample Date	04/19/06	04/21/06	04/21/06	04/21/06	04/21/06	04/21/06	04/21/06	04/19/06	04/19/06	04/18/06
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	320	<68	<870	<29	1,300	500	<59	260	<610	14,000
Naphthalene	<120	<82	<1,000	<34	400	230	<71	<170	<730	<2,600
Phenanthrene	610	<14	770	87	2,300	850	190	510	3,200	22,000
Pyrene	650	<14	850	87	2,100	650	100	400	3,400	23,000
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**10**	NA	**7.4**	NA	**19**	NA	**<5.2**	NA	**<4.3**	**6.4**
Barium	220	NA	450	NA	240	NA	140	NA	130	1,100
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	26	NA	19	NA	38	NA	22	NA	11	39
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	480	NA	61	NA	47	NA	35	NA	170	210
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-78 (2-4')	GP-79 (2-4')	GP-80 (0-2')	GP-80 (8-10')	GP-81 (2-4')	GP-81 (8-10')	GP-82 (2-4')	GP-82 (6-8')	GP-83 (10-13')	GP-83 (2-4')
Sample Date	04/18/06	04/18/06	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<120	<230	<54	<83	250	<69	<53	<71	<75	<140
Acenaphthylene	<210	<390	<91	<140	<100	<120	<90	<120	<130	<230
Anthracene	130	46	<5.4	<8.3	580	<6.9	<5.3	18	63	20
Benzo (a) anthracene	580	190	<5.4	<8.3	1,700 E	72	<5.3	22	700	190
Benzo (a) pyrene	670	180	<5.4	<8.3	1,700 E	14	<5.3	96	69	110
Benzo (b) fluoranthene	520	130	<5.4	<8.3	1,300	<6.9	<5.3	44	120 L1	47 L1
Benzo (g,h,i) perylene	600	120	<5.4	<8.3	990	<6.9	<5.3	66	<7.5	<14
Benzo (k) fluoranthene	400	90	<5.4	<8.3	830	9.2	<5.3	44	78 L1	<14 L1
Chrysene	520	150	<5.4	<8.3	1,500 E	8.6	<5.3	8	250 L1	140 L1
Dibenzo (a,h) anthracene	92	<34	<8.1	<12	200	<10	<7.9	18	<11	<20
Fluoranthene	1,500	500	<11	<17	3,800 E	55	<11	200	870	430
Fluorene	70	<46	<11	<17	110	<14	<11	16	78	91
Indeno (1,2,3-cd) pyrene	540	120	<5.4	<8.3	1,100 E	<6.9	<5.3	97	<7.5	<14
1-Methylnaphthalene	<74	<140	<32	<50	97	<41	<32	180	<45	<81

Footnotes on Page 24.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-78 (2-4')	GP-79 (2-4')	GP-80 (0-2')	GP-80 (8-10')	GP-81 (2-4')	GP-81 (8-10')	GP-82 (2-4')	GP-82 (6-8')	GP-83 (10-13')	GP-83 (2-4')
Sample Date	**04/18/06**	**04/18/06**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	410	<110	<27	<41	520	<34	<26	280	76	<68
Naphthalene	<74	<140	<32	<50	470	<41	<32	210	<45	<81
Phenanthrene	870	130	<5.4	46	2,200 E	7.5	<5.3	120	360	140
Pyrene	1,200	380	<5.4	<8.3	3,200 E	<6.9	<5.3	370	2,000	110
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**5.7**	**8.8**	**8**	**5.2**	**11**	**3.3**	**10**	**7.1**	**7.8**	**9.9**
Barium	2,300	58	17	100	1,200	90	15	74	64	260
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	<0.11	0.52	0.69	0.74	<0.11	0.45	0.49	0.14
Chromium, trivalent	6.1	11	6.6	19	24	21	4.7	8.2	18	20
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	140	17	8.6	8.2	83	6.8	29	27	10	100
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-83 (6-8')	GP-84 (2-4')	GP-84 (6-8')	GP-85 (2-4')	GP-85 (6-8')	GP-86 (2-4')	GP-86 (6-8')	GP-87 (0-2')	GP-87 (4-6')	GP-88 (0-2')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<1,100	<65	<64	<80	<66	33,000	<370	<460	<210	NA
Acenaphthylene	<1,900	<110	<110	<140	<110	12,000	<640	<780	<360	NA
Anthracene	160	<6.5	<6.4	<8.0	<6.6	100,000	<37	<46	23	NA
Benzo (a) anthracene	<110	<6.5	<6.4	20	<6.6	180,000 E	90	<46	170	NA
Benzo (a) pyrene	<110	<6.5	<6.4	20	<6.6	180,000 E	82	<46	170	NA
Benzo (b) fluoranthene	<110 L1	<6.5 L1	<6.4 L1	16 L1	<6.6	130,000 L1	71 L1	<46	130	NA
Benzo (g,h,i) perylene	<110	<6.5	<6.4	9.7	<6.6	110,000	83	<46	150	NA
Benzo (k) fluoranthene	<110 L1	<6.5 L1	<6.4 L1	9.3 L1	<6.6	85,000 L1	39 L1	<46	35	NA
Chrysene	<110 L1	<6.5 L1	<6.4 L1	18 L1	<6.6	170,000 E, L1	86 L1	<46	120	NA
Dibenzo (a,h) anthracene	<160	<9.8	<9.6	<12	<9.9	18,000	<56	<69	<32	NA
Fluoranthene	2,600	<13	<13	44	<13	610,000 E	270	<92	330	NA
Fluorene	250	<13	<13	<16	<13	87,000	<75	<92	<42	NA
Indeno (1,2,3-cd) pyrene	<110	<6.5	<6.4	14	<6.6	120,000 E	58	<46	110	NA
1-Methylnaphthalene	<660	<39	<38	<48	<40	40,000	<220	<280	<130	NA

Footnotes on Page 26.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-83 (6-8')	GP-84 (2-4')	GP-84 (6-8')	GP-85 (2-4')	GP-85 (6-8')	GP-86 (2-4')	GP-86 (6-8')	GP-87 (0-2')	GP-87 (4-6')	GP-88 (0-2')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	<550	<33	<32	<40	<33	300,000	<190	<230	<110	NA
Naphthalene	<660	<39	<38	<48	42	92,000	<220	<280	<130	NA
Phenanthrene	950	<6.5	<6.4	19	<6.6	510,000 E	160	<46	180	NA
Pyrene	4,000	<6.5	<6.4	29	<6.6	420,000 E	210	<46	220	NA
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**11**	**10**	**9**	**31**	**13**	**9.8**	**10**	**9.9**	**9.6**	NA
Barium	120	2.6	2.5	78	130	170	81	30	140	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	1.1	<0.10	<0.10	1.5	1.4	0.93	0.67	<0.11	0.59	NA
Chromium, trivalent	23	1.9	2.1	11	29	22	22	9.9	17	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	18	13	13	85	18	200	11	95	280	NA
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-88 (8-10')	GP-89 (2-4')	GP-89 (6-8')	GP-90 (2-4')	GP-90 (6-8')	GP-91 (10-13')	GP-91 (2-4')	GP-91 (6-8')	GP-92 (10-13')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	NA	<75	<93	<82	<72	<66	<130	<73	<54
Acenaphthylene	NA	<130	<160	<140	<120	<110	<230	<120	<92
Anthracene	NA	<7.5	<9.3	<8.2	19	<6.6	<13	57	<5.4
Benzo (a) anthracene	NA	<7.5	<9.3	<8.2	150	9.3	24	260	6.9
Benzo (a) pyrene	NA	9.1	<9.3	<8.2	420	9.8	58	270	8
Benzo (b) fluoranthene	NA	12	<9.3	<8.2	250	<6.6	32	220	6.5
Benzo (g,h,i) perylene	NA	<7.5	<9.3	<8.2	450	6.8	74	190	<5.4
Benzo (k) fluoranthene	NA	<7.5	<9.3	<8.2	130	<6.6	29	120	5.5
Chrysene	NA	<7.5	<9.3	<8.2	97	7.2	34	250	7.2
Dibenzo (a,h) anthracene	NA	<11	<14	<12	81	<9.9	<20	32	<8.1
Fluoranthene	NA	18	<19	<16	150	27	92	530	25
Fluorene	NA	<15	<19	<16	<14	<13	<27	<15	<11
Indeno (1,2,3-cd) pyrene	NA	<7.5	<9.3	<8.2	430	<6.6	52	210	5.6
1-Methylnaphthalene	NA	<45	<56	<49	<43	<39	<81	<44	<32

Footnotes on Page 28.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-88 (8-10')	GP-89 (2-4')	GP-89 (6-8')	GP-90 (2-4')	GP-90 (6-8')	GP-91 (10-13')	GP-91 (2-4')	GP-91 (6-8')	GP-92 (10-13')
Sample Date	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	NA	<38	<46	<41	72	<33	<67	<37	<27
Naphthalene	NA	<45	<56	<49	<43	<39	<81	<44	<32
Phenanthrene	NA	11	<9.3	<8.2	88	9.6	45	220	12
Pyrene	NA	14	<9.3	<8.2	77	23	130	580	17
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	**7.7**	**<2.5**	**6.2**	**7.4**	**6.1**	**3.7**	**7.2**	**11**
Barium	NA	110	100	110	54	6.4	59	99	14
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	1.6	0.73	0.88	0.73	<0.11	0.25	<0.12	<0.11
Chromium, trivalent	NA	21	16	25	23	4.1	13	9.6	4.9
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	NA	47	13	9.7	40	8.3	26	81	11
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-92 (2-4')	GP-92 (6-8')	GP-93 (2-4')	GP-93 (4-6')	GP-93 (8-10')	GP-94 (0-2')	GP-94 (10-13')	GP-94 (6-8')	GP-95 (2-4')	GP-95 (6-8')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/01/07	05/01/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	230 S2	<100
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	<53	<100
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	<27	<51
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	240
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	<27	77
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	<90	<170
PAHs (µg/kg)										
Acenaphthene	<64	<68	<73	<240	120	<82	<59	<210	<53	<1,000
Acenaphthylene	<110	<110	<120	<410	<150	<140	<100	<360	<90	<1,700
Anthracene	<6.4	<6.8	19	180	210	86	<5.9	600	<5.3	<100
Benzo (a) anthracene	24	8.3	110	480	490	1,400	<5.9	1,200	<5.3	<100
Benzo (a) pyrene	28	9.3	230	460	480	270	<5.9	1,200	<5.3	<100
Benzo (b) fluoranthene	24	8.2	170	380	370	120	<5.9	650	<5.3 L1	<100 L1
Benzo (g,h,i) perylene	18	<6.8	200	280	280	150	<5.9	600	<5.3	<100
Benzo (k) fluoranthene	12	<6.8	110	240	240	<8.2	<5.9	830	<5.3 L1	<100 L1
Chrysene	22	7.4	120	440	470	190	<5.9	1,100	<5.3 L1	<100 L1
Dibenzo (a,h) anthracene	<9.6	<10	37	80	55	42	<8.8	120	<8.0	<150
Fluoranthene	59	26	210	1400	1700	910	<12	2,600	<11	490
Fluorene	<13	<14	<15	110	190	57	<12	72	<11	<200
Indeno (1,2,3-cd) pyrene	20	<6.8	200	340	330	130	<5.9	740	<5.3	<100
1-Methylnaphthalene	<38	<41	45	<150	170	<49	<35	<130	<32	<610

Footnotes on Page 30.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-92 (2-4')	GP-92 (6-8')	GP-93 (2-4')	GP-93 (4-6')	GP-93 (8-10')	GP-94 (0-2')	GP-94 (10-13')	GP-94 (6-8')	GP-95 (2-4')	GP-95 (6-8')
Sample Date	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/01/07**	**05/01/07**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	<32	<34	89	560	650	<41	<29	250	<27	<510
Naphthalene	<38	<41	<44	170	170	<49	<35	<130	<32	<610
Phenanthrene	31	10	70	1,000	1,200	300	<5.9	1,300	<5.3	210
Pyrene	48	16	120	1,200	1,200	88	<5.9	2,200	<5.3	<100
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**21**	**5.2**	**5.8**	**4.4**	**6.9**	**4.5**	**2.6**	**4.9**	**7.3**	**5.6**
Barium	12	6.3	12	740	55	470	17	77	23	120
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	<0.11	<0.11	0.56	0.2	0.47	0.27	<0.10	0.67	<0.11	1.1
Chromium, trivalent	5.9	4.6	4.6	10	20	12	7.3	16	6.8	15
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	48	11	19	260	8.2	64	4.4	190	11	20
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-96 (2-4')	GP-96 (6-8')	GP-97 (4-6')	GP-97 (6-8')	GP-98 (0-2')	GP-98 (4-6')	GP-99 (2-4')	GP-99 (6-8')	GP-100 (2-4')	GP-100 (6-8')
Sample Date	05/01/07	05/01/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/01/07	05/01/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	<280 ,RL1	<140	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	<280 ,RL1	<140	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	<280 ,RL1	<140	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	1,300 RL1	2,900	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	820 RL1	300 S2	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	<560 ,RL1	7,200	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	1,200 RL1	2,600	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	<280 ,RL1	2,000	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	360 RL1	620	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	<280 ,RL1	<140	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	4,300 RL1	9,700	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	1,800 RL1	1,700	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	2,200 RL1	8,300	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<280	11,000	<86	<70	<200	<210	<250	<110	<85	<130
Acenaphthylene	<470	<4,500	<150	<120	<340	<350	<430	<190	<140	<220
Anthracene	120	19,000	<8.6	<7.0	<20	130	640	17	<8.5	29
Benzo (a) anthracene	<28	37,000	<8.6	<7.0	64	150	1,700	<11	<8.5	100
Benzo (a) pyrene	<28	14,000	<8.6	<7.0	76	140	1,600	110	<8.5	90
Benzo (b) fluoranthene	<28	<260 L1	<8.6	<7.0	59	100	930	37	<8.5 L1	71 L1
Benzo (g,h,i) perylene	<28	5,300	<8.6	<7.0	82	110	780	120	<8.5	100
Benzo (k) fluoranthene	<28	<260 L1	<24 RL3	<7.0	41	89	720	19	<8.5 L1	46 L1
Chrysene	<28	17,000 L1	<21 RL3	<7.0	53	140	1400	25	<8.5 L1	93 L1
Dibenzo (a,h) anthracene	<42	<400	<13	<10	<30	<31	180	20	<13	<19
Fluoranthene	<55	83,000	<17 RL3	<14	120	370	3300	200	<17	250
Fluorene	97	23,000	<17	<14	<40	<42	<50	<23	<17	<26
Indeno (1,2,3-cd) pyrene	<28	3,800	<8.6	<7.0	63	96	920	92	<8.5	64
1-Methylnaphthalene	270	18,000	<51	<42	<120	<120	<150	<68	<51	<77

Footnotes on Page 32.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-96 (2-4')	GP-96 (6-8')	GP-97 (4-6')	GP-97 (6-8')	GP-98 (0-2')	GP-98 (4-6')	GP-99 (2-4')	GP-99 (6-8')	GP-100 (2-4')	GP-100 (6-8')
Sample Date	05/01/07	05/01/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/01/07	05/01/07
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	490	82,000	<43	<35	<100	<100	<130	<57	<43	<65
Naphthalene	310	16,000	<51	<42	<120	<120	<150	<68	<51	<77
Phenanthrene	440	100,000 E	<8.6 RL3	<7.0	48	310	1,400	100	<8.5	130
Pyrene	<28	43,000	<130 RL3	<7.0	100	370	3,200	100	<8.5	400
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**22**	**63**	**4.8**	**5.8**	**8.3**	**8.5**	**4.6**	**11**	**36**	**6.7**
Barium	270	1200	29	120	1,400	240	310	40	230	86
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	1.9	8.6	<0.11	0.8	0.21	0.96	0.22	0.84	3.6	0.95
Chromium, trivalent	230	1100	8.8	28	8.1	12	16	10	140	17
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	110	**800**	8	6.3	85	120	58	37	**930**	48
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-101 (0-2')	GP-101 (4-6')	GP-102 (2-4')	GP-102 (6-8')	GP-103 (2-4')	GP-103 (6-8')	GP-104 (2-4')	GP-104 '(6-8')	GP-105 (2-4')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	<69	<63	<72	<60	<130	<65	<1,100	<66	<460
Acenaphthylene	<120	<110	<120	<100	<220	<110	<1,800	<110	<790
Anthracene	<6.9	<6.3	<7.2	<6.0	25	<6.5	370	<6.6	610
Benzo (a) anthracene	8.2	<6.3	7.3	<6.0	150	<6.5	1,700	<6.6	1,900
Benzo (a) pyrene	12	<6.3	52	<6.0	170	<6.5	1,900	<6.6	2,300
Benzo (b) fluoranthene	8.2	<6.3	59	<6.0	130	<6.5	1,400	<6.6	1,800
Benzo (g,h,i) perylene	7.6	<6.3	93	<6.0	120	<6.5	1,300	<6.6	1,300
Benzo (k) fluoranthene	<6.9	<6.3	47	<6.0	200	<6.5	970	<6.6	1,200
Chrysene	8.5	<6.3	16	<6.0	140	<6.5	1,700	<6.6	2,000
Dibenzo (a,h) anthracene	<10	<9.5	17	<9.1	27	<9.8	280	<10	280
Fluoranthene	26	<13	29	13	360	<13	4,700	<13	6,200
Fluorene	<14	<13	<14	<12	<26	<13	250	<13	460
Indeno (1,2,3-cd) pyrene	9.1	<6.3	60	<6.0	120	<6.5	1,400	<6.6	1,600
1-Methylnaphthalene	<41	<38	<43	<36	130	<39	<640	<40	<280

Footnotes on Page 34.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-101 (0-2')	GP-101 (4-6')	GP-102 (2-4')	GP-102 (6-8')	GP-103 (2-4')	GP-103 (6-8')	GP-104 (2-4')	GP-104 '(6-8')	GP-105 (2-4')
Sample Date	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	<34	<32	<36	<30	330	<33	<530	<33	<230
Naphthalene	<41	<38	71	<36	110	<39	<640	<40	<280
Phenanthrene	<6.9	<6.3	12	<6.0	180	<6.5	2,200	<6.6	3,700
Pyrene	11	<6.3	14	6.3	580	<6.5	5,900	<6.6	4,900
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**2.2**	**4.9**	**2**	**3.8**	**11**	**2.5**	**<4.7**	**1.8**	**3.3**
Barium	8	10	9.4	9.1	370	62	150	58	93
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	<0.11	<0.13	<0.12	<0.12	1.3	0.43	1	0.43	1.6
Chromium, trivalent	4.8	6.6	3.8	4	83	20	6.1	18	14
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	3.9	4.8	4.2	3.6	**520**	5.9	190	3.6	150
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-105 (6-8')	GP-106 (0-2')	GP-106 (4-6')	GP-107 (0-2')	GP-108 (0-2')	GP-109 (2-4')	GP-110 (0-2')	GP-110 (2-4')	GP-111 (0-2')
Sample Date	05/03/07	05/03/07	05/03/07	06/15/09	06/15/09	06/15/09	06/15/09	06/15/09	06/15/09
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	<68	<90	<180	<240	<240	<83	<270	NA	<58
Acenaphthylene	<120	<150	<300	<400	<400	<140	<450	NA	<98
Anthracene	<6.8	<9.0	<18	150	78	12	41	NA	24
Benzo (a) anthracene	<6.8	11	<18	520	270	180	<27	NA	130
Benzo (a) pyrene	<6.8	25	25	670	200	44	<27	NA	34
Benzo (b) fluoranthene	<6.8	17	23	960	500	49	<27	NA	79
Benzo (g,h,i) perylene	<6.8	31	<18	740	220	37	<27	NA	41
Benzo (k) fluoranthene	<6.8	<9.0	<18	530	100	85	<27	NA	17
Chrysene	<6.8	19	19	1,200	700	96	<27	NA	89
Dibenzo (a,h) anthracene	<10	<14	<27	80	<36	<12	<40	NA	<8.7
Fluoranthene	<14	69	80	2,300	1,000	160	450	NA	370
Fluorene	<14	<18	<36	110	53	130	<53	NA	93
Indeno (1,2,3-cd) pyrene	<6.8	<9.0	20	900	330	37	<27	NA	26
1-Methylnaphthalene	<41	130	<110	780	270	220	<160	NA	190

Footnotes on Page 36.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-105 (6-8')	GP-106 (0-2')	GP-106 (4-6')	GP-107 (0-2')	GP-108 (0-2')	GP-109 (2-4')	GP-110 (0-2')	GP-110 (2-4')	GP-111 (0-2')
Sample Date	05/03/07	05/03/07	05/03/07	06/15/09	06/15/09	06/15/09	06/15/09	06/15/09	06/15/09
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	<34	<45	<89	2,200	890	250	290	NA	330
Naphthalene	<41	64	<110	780	330	560	<160	NA	150
Phenanthrene	<6.8	<9.0	37	1,300	480	120	180	NA	170
Pyrene	<6.8	<9.0	39	2,400	1,300	190	630	NA	270
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**7.6**	**<1.7**	**<3.2**	NA	NA	NA	NA	NA	NA
Barium	140	25	20	NA	NA	NA	NA	NA	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.81	0.2	<0.23	NA	NA	NA	NA	NA	NA
Chromium, trivalent	23	4.8	5.7	NA	NA	NA	NA	NA	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	9.4	16	25	NA	NA	NA	NA	200	NA
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-111 (2-4')	GP-112 (2-4')	GP-112 (4-6')	GP-113 (2-4')	GP-113 (6-8')	GP-114 (2-4')	GP-114 (4-6')	GP-115 (2-4')	GP-115 (4-6')
Sample Date	06/15/09	06/15/09	06/15/09	06/15/09	06/15/09	06/18/09	06/18/09	06/18/09	06/18/09
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	NA	<130	<70	310	<63	NA	NA	<380	1,800
Acenaphthylene	NA	<220	<120	<230	<110	NA	NA	<640	<1,200
Anthracene	NA	110	140	320	<6.3	NA	NA	280	3,700
Benzo (a) anthracene	NA	140	120	1,200	<6.3	NA	NA	1,200	5,000
Benzo (a) pyrene	NA	120	84	1,400	<6.3	NA	NA	1,200	5,400
Benzo (b) fluoranthene	NA	260	93	2,100	<6.3	NA	NA	1,200	7,100
Benzo (g,h,i) perylene	NA	140	70	1,200	<6.3	NA	NA	1,100	4,200
Benzo (k) fluoranthene	NA	85	21	990	8.1	NA	NA	640	3,100
Chrysene	NA	370	190	2,100	<6.3	NA	NA	2,400	7,900
Dibenzo (a,h) anthracene	NA	20	12	160	<9.5	NA	NA	300	420
Fluoranthene	NA	1,100	460	4,900	<13	NA	NA	4,400	21,000
Fluorene	NA	530	340	730	16	NA	NA	120	2,400
Indeno (1,2,3-cd) pyrene	NA	110	110	1,300	<6.3	NA	NA	1,600	4,200
1-Methylnaphthalene	NA	150	180	530	<38	NA	NA	330	1400

Footnotes on Page 38.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-111 (2-4')	GP-112 (2-4')	GP-112 (4-6')	GP-113 (2-4')	GP-113 (6-8')	GP-114 (2-4')	GP-114 (4-6')	GP-115 (2-4')	GP-115 (4-6')
Sample Date	**06/15/09**	**06/15/09**	**06/15/09**	**06/15/09**	**06/15/09**	**06/18/09**	**06/18/09**	**06/18/09**	**06/18/09**
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	NA	640	160	2,000	<38	NA	NA	1,500	7,900
Naphthalene	NA	380	96	990	<38	NA	NA	690	1,900
Phenanthrene	NA	500	370	1,600	8	NA	NA	2,600	15,000
Pyrene	NA	1,300	540	4,900	<6.3	NA	NA	4,900	22,000
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	NA	NA	NA	NA	NA	NA	NA
Barium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	NA	NA	NA	NA	NA	NA	NA	NA	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	64	NA	NA	NA	NA	58	120	NA	NA
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-116 (2-4')	GP-116 (4-6')	GP-117 (2-4')	GP-117 (4-6')	GP-118 (2-4')	GP-118 (4-6')	GP-118 (6-8')	GP-119 (2-4')	GP-119 (6-8')
Sample Date	06/18/09	06/18/09	06/18/09	06/18/09	06/19/09	06/19/09	06/19/09	06/19/09	06/19/09
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	<540	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	<540	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	<540	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	9,500	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	<1,100	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	<1,100	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	9,500	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	2,500	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	2,200	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	<540	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	30,000	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	11,000	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	31,000	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	NA	NA	<56	270	<260	NA	<72	<53	<78
Acenaphthylene	NA	NA	<96	<100	<450	NA	<120	<90	<130
Anthracene	NA	NA	46	98	1,000	NA	360	22	120
Benzo (a) anthracene	NA	NA	160	290	10,000	NA	1,900	490	1,500
Benzo (a) pyrene	NA	NA	120	570	<26	NA	510	<5.3	340
Benzo (b) fluoranthene	NA	NA	380	640	3,300	NA	1,100	310	950
Benzo (g,h,i) perylene	NA	NA	200	680	<26	NA	<7.2	<5.3	<7.8
Benzo (k) fluoranthene	NA	NA	59	280	<26	NA	580	240	350
Chrysene	NA	NA	350	620	15,000 E	NA	4,200	940	880
Dibenzo (a,h) anthracene	NA	NA	27	100	<39	NA	<11	<7.9	<12
Fluoranthene	NA	NA	590	1,000	16,000	NA	3,700	260	2,400
Fluorene	NA	NA	59	630	2,600	NA	590	14	420
Indeno (1,2,3-cd) pyrene	NA	NA	220	420	<26	NA	<7.2	<5.3	<7.8
1-Methylnaphthalene	NA	NA	300	300	3,000	NA	1,600	100	630

Footnotes on Page 40.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-116 (2-4')	GP-116 (4-6')	GP-117 (2-4')	GP-117 (4-6')	GP-118 (2-4')	GP-118 (4-6')	GP-118 (6-8')	GP-119 (2-4')	GP-119 (6-8')
Sample Date	**06/18/09**	**06/18/09**	**06/18/09**	**06/18/09**	**06/19/09**	**06/19/09**	**06/19/09**	**06/19/09**	**06/19/09**
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	NA	NA	650	980	4,000	NA	3,900	<32	1,300
Naphthalene	NA	NA	420	570	5,100	NA	200	<32	260
Phenanthrene	NA	NA	360	440	5,500	NA	4,200	83	1,000
Pyrene	NA	NA	640	650	23,000 E	NA	11,000	320	3,800
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	NA	NA	NA	NA	NA	NA	NA
Barium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	NA	NA	NA	NA	NA	NA	NA	NA	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	82	170	NA	NA	100	NA	86	33	40
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-120 (2-4')	GP-120 (6-8')	EW-1 (4-6')	MW-1 (2-4')	MW-2 (6-8')	MW-3 (2-4')	MW-4 (0-2')	MW-5 (2-4')	MW-6 (6-8')	MW-7 (2-4')
Sample Date	06/19/09	06/19/09	04/27/04	04/28/04	04/29/04	04/29/04	04/30/04	05/03/04	04/30/04	05/04/04
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	<29
cis-1,2-Dichloroethene	NA	NA	<30	<31	<41	<29	<27	<31	<33	<29
Ethylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	<29
Isopropylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	231
Methylene Chloride	NA	NA	<61	<61	<83	<57	<54	<62	<65	<58
Naphthalene	NA	NA	41 Q	<31	43	<29	41	<31	<33	706
n-Propylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	428
p-Isopropyltoluene	NA	NA	<30	<31	66	<29	<27	<31	<33	347
sec-Butylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	914
Toluene	NA	NA	<30	<31	<41	<29	<27	<31	<33	<29
1,2,4-Trimethylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	1160
1,3,5-Trimethylbenzene	NA	NA	<30	<31	<41	<29	<27	<31	<33	266
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	<42	<43	<58	<40	<38	<43	<46	<41
PAHs (µg/kg)										
Acenaphthene	<57	3,700	<61	<61	<83	<57	75	<62	<65	<58
Acenaphthylene	<97	<1,200	<100	<100	<140	<97	<92	<110	<110	<98
Anthracene	62	2,700	33	24	38	<5.7	62	11	<6.5	58
Benzo (a) anthracene	2,000	3,800	21	208	496	<5.7	183	50	<6.5	32
Benzo (a) pyrene	<5.7	<69	47	208	48	<5.7	216	34	<6.5	<5.8
Benzo (b) fluoranthene	1,300	2,100	18	171	10	<5.7	162	29	<6.5	8.8
Benzo (g,h,i) perylene	<5.7	520	50	183	<8.3	<5.7	216	62	<6.5	<5.8
Benzo (k) fluoranthene	430	420	56	110	<8.3	<5.7	95	14	<6.5	<5.8
Chrysene	480	18,000	34	183	215	<5.7	183	37	<6.5	10
Dibenzo (a,h) anthracene	<8.5	470	<9.1	40	<12	<8.6	39	<9.3	<9.8	<8.7
Fluoranthene	1,300	48,000	618	465	562	<11	463	137	<13	324
Fluorene	29	3,500	42	<12	50	<11	25	<12	<13	110
Indeno (1,2,3-cd) pyrene	<5.7	<69	8.4	171	<8.3	<5.7	183	50	<6.5	<5.8
1-Methylnaphthalene	84	500	<36	<37	<50	<34	51	<37	<39	359

Footnotes on Page 42.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-120 (2-4')	GP-120 (6-8')	EW-1 (4-6')	MW-1 (2-4')	MW-2 (6-8')	MW-3 (2-4')	MW-4 (0-2')	MW-5 (2-4')	MW-6 (6-8')	MW-7 (2-4')
Sample Date	06/19/09	06/19/09	04/27/04	04/28/04	04/29/04	04/29/04	04/30/04	05/03/04	04/30/04	05/04/04
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	84	11,000	78	183	73	<29	194	<31	<33	683
Naphthalene	42	710	50	<37	<50	<34	<32	<37	<39	78
Phenanthrene	260	23,000	206	159	215	<5.7	237	73	<6.5	243
Pyrene	1,200	66,000 E	120	452	74	<5.7	366	137	<6.5	336
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	**13**	**9.7**	**<10 D**	**<7.1 D**	**10**	**21**	**<8.1 D**	**<7.2 D**
Barium	NA	NA	315	2,200	215	13	75	224	130	43
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	1.35	1.3	0.5	0.73	0.95	1.1	0.76	0.5
Chromium, trivalent	NA	NA	40	31	50	8	5.4	55	31	14
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	68	180	170	120	15	4.5	56	**2110**	8.1	19
Mercury	NA	NA	0.055	0.29	0.064	<0.011	0.056	0.24	0.023	0.019
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	<13 D	<13 D	<18 D	<13 D	<12 D	<14 D	<14 D	<13 D
Silver	NA	NA	<0.39 D	<0.39 D	<0.53 D	<0.37 D	<0.34 D	<0.40 D	<0.42 D	<0.37 D
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-8 (2-4')	MW-9 (2-4')	MW-10 (6-8')	MW-11 (4-6')	MW-12 (2-4')	MW-13 (10-13')	MW-13 (2-4')	MW-13 (6-8')	MW-14 (10-13')
Sample Date	05/03/04	04/30/04	05/04/04	05/03/04	05/03/04	05/01/07	05/01/07	05/01/07	05/01/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
cis-1,2-Dichloroethene	<30	<33	<29	<35	<75	NA	NA	NA	NA
Ethylbenzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
Isopropylbenzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
Methylene Chloride	<59	<65	<58	<70	<150	NA	NA	NA	NA
Naphthalene	809	78	<29	<35	<75	NA	NA	NA	NA
n-Propylbenzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
p-Isopropyltoluene	<30	<33	<29	<35	<75	NA	NA	NA	NA
sec-Butylbenzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
Toluene	<30	61	<29	<35	<75	NA	NA	NA	NA
1,2,4-Trimethylbenzene	44	60	<29	<35	<75	NA	NA	NA	NA
1,3,5-Trimethylbenzene	<30	<33	<29	<35	<75	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	<42	169	<41	<49	<110	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	7,970	130	<58	<70	331	<59	<790	<180	<59
Acenaphthylene	<1,000	<110	<99	<120	<260	<100	<1,300	<310	<100
Anthracene	9,750	156	<5.8	<7.0	100	<5.9	<79	38	<5.9
Benzo (a) anthracene	29,700	964	7.1	<7.0	723	<5.9	330	160	<5.9
Benzo (a) pyrene	25,000	938	<5.8	<7.0	753	<5.9	510	210	<5.9
Benzo (b) fluoranthene	20,200	625	10	<7.0	512	<5.9 L1	380 L1	170 L1	<5.9 L1
Benzo (g,h,i) perylene	14,300	742	<5.8	8.5	572	<5.9	590	230	<5.9
Benzo (k) fluoranthene	13,100	430	<5.8	<7.0	361	<5.9 L1	200 L1	120 L1	<5.9 L1
Chrysene	30,900	768	8.2	<7.0	663	<5.9 L1	290 L1	170 L1	<5.9 L1
Dibenzo (a,h) anthracene	3,570	143	<8.7	<11	78	<8.8	<120	30	<8.8
Fluoranthene	111,000	1,820	<12	25	2,020	<12	690	470	<12
Fluorene	14,300	40	<12	<14	69	<12	<160	<37	<12
Indeno (1,2,3-cd) pyrene	16,600	651	<5.8	<7.0	542	<5.9	410	170	<5.9
1-Methylnaphthalene	6,420	130	<35	<42	<90	<35	<470	<110	<35

Footnotes on Page 44.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-8 (2-4')	MW-9 (2-4')	MW-10 (6-8')	MW-11 (4-6')	MW-12 (2-4')	MW-13 (10-13')	MW-13 (2-4')	MW-13 (6-8')	MW-14 (10-13')
Sample Date	05/03/04	04/30/04	05/04/04	05/03/04	05/03/04	05/01/07	05/01/07	05/01/07	05/01/07
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	49,900	781	<29	<35	2,620	<29	<400	<92	<29
Naphthalene	9,630	169	<35	<42	140	<35	<470	<110	<35
Phenanthrene	103,000	677	<5.8	14	753	<5.9	410	190	<5.9
Pyrene	97,500	2,080	10	9.1	2,050	<5.9	460	450	<5.9
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**<7.4 D**	**16**	**<7.2 D**	**<8.7 D**	**<19 D**	**8.4**	**15**	**8.4**	**7**
Barium	1,660	234	65	97	66	59	190	130	59
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	<0.33 D	0.86	1.3	0.39	<0.84 D	0.5	1.8	3.1	0.75
Chromium, trivalent	24	14	16	18	5.1	16	28	24	19
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	166	378	21	17	84	13	72	130	22
Mercury	0.094	0.099	0.013	0.043	<0.030	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	<13 D	<14 D	<13 D	<15 D	<33 D	NA	NA	NA	NA
Silver	<0.38 D	<0.42 D	<0.37 D	<0.45 D	<0.96 D	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-14 (2-4')	MW-14 (6-8')	MW-15 (0-2')	MW-15 (10-12')	MW-15 (4-6')	MW-16 (10-13')	MW-16 (2-4')	MW-16 (6-8')	MW-17 (10-13')
Sample Date	05/01/07	05/01/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)									
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)									
Acenaphthene	<140	<69	<660	<76	<480	<110	<99	270	<57
Acenaphthylene	<240	<120	<1,100	<130	<820	<190	<170	<290	<97
Anthracene	130	<6.9	82	<7.6	98	<11	<9.9	22	<5.7
Benzo (a) anthracene	270	<6.9	330	<7.6	130	<11	63	150	<5.7
Benzo (a) pyrene	270	<6.9	410	<7.6	180	<11	93	130	<5.7
Benzo (b) fluoranthene	220 L1	<6.9 L1	310 L1	<7.6	120 L1	<11	67 L1	140 L1	<5.7
Benzo (g,h,i) perylene	240	<6.9	270	<7.6	100	<11	98	100	<5.7
Benzo (k) fluoranthene	150 L1	<6.9 L1	200 L1	<7.6	79 L1	<11	53 L1	130 L1	<5.7
Chrysene	240 L1	<6.9 L1	320 L1	<7.6	120 L1	<11	54 L1	510 L1	<5.7
Dibenzo (a,h) anthracene	31	<10	<99	<11	<72	<16	22	<26	<8.6
Fluoranthene	980	19	820	31	660	<22	91	1100	<11
Fluorene	66	<14	<130	<15	<96	<22	<20	47	<11
Indeno (1,2,3-cd) pyrene	180	<6.9	280	<7.6	98	<11	110	95	<5.7
1-Methylnaphthalene	200	<41	<390	<46	<290	<66	<59	<100	<34

Footnotes on Page 46.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-14 (2-4')	MW-14 (6-8')	MW-15 (0-2')	MW-15 (10-12')	MW-15 (4-6')	MW-16 (10-13')	MW-16 (2-4')	MW-16 (6-8')	MW-17 (10-13')
Sample Date	05/01/07	05/01/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07	04/30/07
PAHs (µg/kg) (continued)									
2-Methylnaphthalene	250	<34	<330	<38	<240	<55	<49	<85	<29
Naphthalene	<85	<41	<390	<46	<290	<66	<59	<100	<34
Phenanthrene	580	<6.9	310	<7.6	290	<11	35	570	<5.7
Pyrene	600	9.6	570	<7.6	330	<11	30	91	<5.7
Metals (mg/kg)									
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**5.9**	**9.1**	**27**	**5.2**	**13**	**12**	**5.6**	**5.2**	**10**
Barium	65	0.27	750	38	470	68	110	870	56
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.46	<0.14	1.7	0.95	1.9	0.49	0.5	<0.34	0.26
Chromium, trivalent	7.8	<0.25	43	8.8	7.3	21	11	2.4	16
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	56	<1.7	190	15	340	12	58	88	11
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-17 (2-4')	MW-17 (6-8')	MW-18 1-2	MW-18 (4-6')	MW-19 (3-4')	MW-19 (6-8')	MW-20 (2-4')	MW-20 (6-8')	MW-21 (4-6')	MW-22 (2-4')
Sample Date	04/30/07	04/30/07	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/17/09
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	190	5.9
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<59	<120	NA	NA	NA	NA	NA	NA	<120	<51
Acenaphthylene	<100	<200	NA	NA	NA	NA	NA	NA	<200	<88
Anthracene	100	<12	NA	NA	NA	NA	NA	NA	200	<5.1
Benzo (a) anthracene	290	<12	NA	NA	NA	NA	NA	NA	420	<5.1
Benzo (a) pyrene	<5.9	<12	NA	NA	NA	NA	NA	NA	340	<5.1
Benzo (b) fluoranthene	<5.9	<12 L1	NA	NA	NA	NA	NA	NA	570	<5.1
Benzo (g,h,i) perylene	<5.9	<12	NA	NA	NA	NA	NA	NA	300	<5.1
Benzo (k) fluoranthene	<5.9	<12 L1	NA	NA	NA	NA	NA	NA	230	<5.1
Chrysene	140	<12 L1	NA	NA	NA	NA	NA	NA	900	<5.1
Dibenzo (a,h) anthracene	<8.9	<18	NA	NA	NA	NA	NA	NA	<18	<7.7
Fluoranthene	1300	<23	NA	NA	NA	NA	NA	NA	1600	<10
Fluorene	120	<23	NA	NA	NA	NA	NA	NA	500	<10
Indeno (1,2,3-cd) pyrene	<5.9	<12	NA	NA	NA	NA	NA	NA	290	<5.1
1-Methylnaphthalene	190	<70	NA	NA	NA	NA	NA	NA	370	<31

Footnotes on Page 48.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-17 (2-4')	MW-17 (6-8')	MW-18 1-2	MW-18 (4-6')	MW-19 (3-4')	MW-19 (6-8')	MW-20 (2-4')	MW-20 (6-8')	MW-21 (4-6')	MW-22 (2-4')
Sample Date	04/30/07	04/30/07	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/16/09	06/17/09
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	930	<59	NA	NA	NA	NA	NA	NA	960	<31
Naphthalene	50	<70	NA	NA	NA	NA	NA	NA	500	<31
Phenanthrene	900	<12	NA	NA	NA	NA	NA	NA	780	5.2
Pyrene	350	<12	NA	NA	NA	NA	NA	NA	3,100	<5.1
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	**11**	**<2.2**	NA	NA	NA	NA	NA	NA	NA	NA
Barium	88	54	100	310	83	100	22	13	NA	NA
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.67	0.66	NA	NA	NA	NA	NA	NA	NA	NA
Chromium, trivalent	72	15	NA	NA	NA	NA	NA	NA	NA	NA
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	220	7.2	NA	NA	NA	NA	NA	NA	NA	NA
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-23 (6-8')	MW-24 (4-6')	MW-25 (0-2')	RW-4 (10-12')	RW-4 (2-4')	RW-4 (6-8')	RW-5 (10-12')	RW-5 (2-4')	RW-5 (6-8')	GP-WL-1 (2-4')
Sample Date	06/17/09	06/17/09	06/17/09	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	33	8,200 QU	38	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)										
Benzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)										
Acenaphthene	<70	<120	<50	<68	<680	<150	<59	<73	<94	<99
Acenaphthylene	<120	<200	<84	<120	<1,200	<250	<100	<120	<160	<170
Anthracene	35	470	<5	18	140	15	<5.9	180	<9.4	61
Benzo (a) anthracene	150	1,500	24	<6.8	580	87	<5.9	640	<9.4	190
Benzo (a) pyrene	29	670	18	<6.8	510	69	<5.9	620	<9.4	170
Benzo (b) fluoranthene	55	1,600	18	<6.8 L1	550 L1	72 L1	<5.9	440	<9.4	120
Benzo (g,h,i) perylene	<7	610	19	<6.8	430	32	<5.9	350	<9.4	110
Benzo (k) fluoranthene	110	<12	9.8	<6.8 L1	200 L1	39 L1	<5.9	250	<9.4	76
Chrysene	250	2,700	31	<6.8 L1	480 L1	55 L1	<5.9	550	<9.4	150
Dibenzo (a,h) anthracene	<11	50	<7.4	<10	<100	<22	<8.8	72	<14	26
Fluoranthene	520	4,500	63	290	1,200	200	<12	1500	<19	380
Fluorene	210	650	<9.9	21	<140	<30	<12	39	<19	<20
Indeno (1,2,3-cd) pyrene	32	580	30	<6.8	330	52	<5.9	380	<9.4	110
1-Methylnaphthalene	180	590	<30	<41	<410	<90	<35	<44	<56	<59

Footnotes on Page 50.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	MW-23 (6-8')	MW-24 (4-6')	MW-25 (0-2')	RW-4 (10-12')	RW-4 (2-4')	RW-4 (6-8')	RW-5 (10-12')	RW-5 (2-4')	RW-5 (6-8')	GP-WL-1 (2-4')
Sample Date	**06/17/09**	**06/17/09**	**06/17/09**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**
PAHs (µg/kg) (continued)										
2-Methylnaphthalene	370	1,600	<30	39	<340	<75	<29	320	<47	<49
Naphthalene	200	1,000	<30	<41	<410	<90	<35	160	<56	<59
Phenanthrene	260	1,900	16	100	500	91	<5.9	980	21	260
Pyrene	150	8,500	81	<6.8	690	130	<5.9	1,600	<9.4	1,000
Metals (mg/kg)										
Antimony	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Arsenic	NA	NA	NA	**13**	**13**	**9.5**	**3**	**14**	**7.4**	**5.5**
Barium	NA	NA	NA	140	760	200	58	230	160	75
Beryllium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Cadmium	NA	NA	NA	0.91	0.72	1.3	0.19	0.34	1.7	1.1
Chromium, trivalent	NA	NA	NA	23	42	21	13	19	36	3.9
Copper	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Lead	NA	NA	NA	13	55	**660**	5.5	190	11	130
Mercury	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-WL-1 (6-8')	GP-WL-2 (2-4')	GP-WL-2 (6-8')	GP-WL-3 (2-4')	GP-WL-3 (6-8')	GP-WL-4 (2-4')	GP-WL-4 (6-8')
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
DRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA
GRO (mg/kg)	NA	NA	NA	NA	NA	NA	NA
VOCs (µg/kg)							
Benzene	NA	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	NA	NA	NA	NA	NA	NA	NA
Methylene Chloride	NA	NA	NA	NA	NA	NA	NA
Naphthalene	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	NA	NA	NA	NA	NA	NA	NA
Toluene	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	NA	NA	NA	NA	NA	NA	NA
Xylene, -o	NA	NA	NA	NA	NA	NA	NA
Xylenes, -m, -p	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	NA	NA	NA	NA	NA	NA	NA
PAHs (µg/kg)							
Acenaphthene	<74	<99	<86	<100	<66	<67	<72
Acenaphthylene	<130	<170	<150	<170	<110	<110	<120
Anthracene	<7.4	31	<8.6	<10	<6.6	17	<7.2
Benzo (a) anthracene	<7.4	270	<8.6	32	<6.6	69	<7.2
Benzo (a) pyrene	<7.4	270	<8.6	39	<6.6	41	<7.2
Benzo (b) fluoranthene	11	290	<8.6	35	<6.6	41	<7.2
Benzo (g,h,i) perylene	<7.4	160	<8.6	28	<6.6	35	<7.2
Benzo (k) fluoranthene	<7.4	170	<8.6	21	<6.6	23	<7.2
Chrysene	<7.4	250	<8.6	36	<6.6	56	<7.2
Dibenzo (a,h) anthracene	<11	46	<13	<15	<9.9	<10	<11
Fluoranthene	<15	340	<17	96	<13	120	<14
Fluorene	<15	<20	<17	<20	<13	<13	<14
Indeno (1,2,3-cd) pyrene	<7.4	170	<8.6	30	<6.6	35	<7.2
1-Methylnaphthalene	<44	110	<52	<61	<40	87	<43

Footnotes on Page 52.

Table 2. Comparison of Site-Wide Soil Analytical Results to Generic Soil Cleanup Standards, Former Meritor Facility, Oshkosh, Wisconsin.

Sample ID	GP-WL-1 (6-8')	GP-WL-2 (2-4')	GP-WL-2 (6-8')	GP-WL-3 (2-4')	GP-WL-3 (6-8')	GP-WL-4 (2-4')	GP-WL-4 (6-8')
Sample Date	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**	**05/03/07**
PAHs (µg/kg) (continued)							
2-Methylnaphthalene	<37	280	<43	<51	<33	180	<36
Naphthalene	<44	110	<52	<61	<40	63	<43
Phenanthrene	<7.4	190	<8.6	52	<6.6	98	<7.2
Pyrene	<7.4	280	<8.6	100	<6.6	55	<7.2
Metals (mg/kg)							
Antimony	NA	NA	NA	NA	NA	NA	NA
Arsenic	**3.9**	**8.6**	**5.7**	**5.8**	**8.2**	**5.1**	**7.7**
Barium	120	140	120	55	100	37	130
Beryllium	NA	NA	NA	NA	NA	NA	NA
Cadmium	0.75	0.85	0.89	1.3	0.84	0.86	1.2
Chromium, trivalent	22	12	27	16	28	8.2	33
Copper	NA	NA	NA	NA	NA	NA	NA
Lead	10	71	9.1	44	8.6	23	6.7
Mercury	NA	NA	NA	NA	NA	NA	NA
Nickel	NA	NA	NA	NA	NA	NA	NA
Selenium	NA	NA	NA	NA	NA	NA	NA
Silver	NA	NA	NA	NA	NA	NA	NA
Zinc	NA	NA	NA	NA	NA	NA	NA

--	Generic regulatory criteria not established.
Underline	Value exceeds NR 720 residual contaminant levels (RCLs) for protection of groundwater.
Bold	Value exceeds the generic NR 720 industrial direct contact RCLs.
Box	Value exceeds the generic NR 720 industrial direct contact RCLs.
DRO	Diesel Range Organics.
GRO	Gasoline Range Organics.
GW Pathway	WDNR NR720 RCLs for protection of groundwater or NR 746 residual product (whichever is lesser).
µg/kg	Micrograms per kilogram.
mg/kg	Milligrams per kilogram.
NA	Not analyzed.
NR720 IND DC	WDNR NR720 Generic Industrial Direct Contact RCLs.
NR720 NON-IND DC	WDNR NR720 Generic Non-Industrial Direct Contact RCLs.
PAHs	Polycyclic Aromatic Hydrocarbons.
Q	Sample concentration is less than the practical quantitation limit.
QU	Unquantitated hydrocarbons present outside the reported carbon range.
RL1 or L1	Report limit raised due to sample matrix effects.
VOCs	Volatile Organic Compounds.

Because we care
100% recycled paper produced by wind power energy

Table 3. Summary of Barium Soil and Groundwater Concentrations, Former Meritor Facility, 1005 High Avenue, Oshkosh, Wisconsin.

ID	Soil Sample Depth	Soil Concentration	Groundwater Concentration
REC 1			
GP-16	8-10'	***415***	1,120*
GP-17	--	--	154*
GP-35	8-10'	210	550*
GP-38	8-10'	200	150*
GP-45	2-4'	290	250
	6-8'	89	
GP-46	0-2'	13	--
	2-4'	63	
GP-47	4-6'	260	280
	6-8'	150	
GP-80	0-2'	17	210
	8-10'	100	
GP-81	2-4'	***1,200***	240
	8-10'	90	
MW-1	2-4'	***2,200***	210
MW-2	6-8'	215	220
EW-1	4-6'	315	190
REC 2			
GP-2	--	--	147*
MW-7	2-4'	43	180
REC 3A			
GP-13	--	--	329*
GP-14	8-10'	313	470*
GP-19	--	--	234*
GP-43	6-8'	140	180*
GP-48	2-4'	***1,300***	--
	4-6'	***590***	
GP-49	0-2'	8.6	--
	4-6'	***380***	
GP-83	2-4'	260	210
	6-8'	120	
	10-13'	64	
RW-4	2-4'	***760***	270
	6-8'	200	
	10-12'	140	
REC 3B			
GP-3	--	--	5.3*
GP-50	0-2'	330	--
	4-6'	80	
GP-51	0-2'	30	--
	2-4'	***400***	
GP-52	0-2'	***500***	--
	2-4'	250	

Footnotes on Page 5.

Table 3. Summary of Barium Soil and Groundwater Concentrations, Former Meritor Facility, 1005 High Avenue, Oshkosh, Wisconsin.

ID	Soil Sample Depth	Soil Concentration	Groundwater Concentration
REC 3B			
(continued)			
GP-85	2-4'	78	--
	6-8'	130	
GP-86	2-4'	170	--
	6-8'	81	
GP-87	0-2'	30	--
	4-6'	140	
GP-88	--	--	160
MW-3	2-4'	13	73
MW-9	2-4'	234	180
REC 3C			
GP-53	0-2'	110	--
	2-4'	140	
GP-54	0-2'	6.2	--
	2-4'	***2,300***	
REC 3D			
GP-56	4-6'	170	170
	6-8'	180	
GP-57	0-2'	8.1	--
GP-58	2-4'	110	--
	4-6'	***2,000***	
GP-59	2-4'	46	--
	4-5'	33	
REC 4			
GP-28	0-2'	150	--
GP-29	0-2'	170	--
GP-60	0-2'	69	--
GP-61	4-6'	66	--
REC 5			
GP-32	0-2'	16	160*
GP-62	2-4'	160	220
	4-6'	73	
REC 6			
GP-33	0-2'	30	160*
GP-63	4-6'	***1,000***	--
GP-64	8-10'	190	250
GP-65	4-6'	130	--
GP-95	2-4'	23	--
	6-8'	120	
GP-96	2-4'	270	--
	6-8'	***1,200***	

Footnotes on Page 5.

Table 3. Summary of Barium Soil and Groundwater Concentrations, Former Meritor Facility, 1005 High Avenue, Oshkosh, Wisconsin.

ID	Soil Sample Depth	Soil Concentration	Groundwater Concentration
RECs 8&10			
GP-24	0-2'	110	180*
GP-41	0-2'	14	300*
GP-66	0-2'	60	--
	4-6'	***1,100***	
GP-67	0-2'	58	--
	4-6'	110	
GP-68	0-2'	9.6	--
	4-6'	140	
GP-82	2-4'	15	--
	6-8'	74	
GP-97	4-6'	29	--
	6-8'	120	
GP-98	0-2'	***1,400***	--
	4-6'	240	
MW-5	2-4'	224	350
REC 11			
GP-4	--	--	6.5*
REC 12			
GP-69	0-2'	79	--
GP-70	0-2'	39	--
REC 13			
GP-42	0-2'	22	150*
GP-44	0-4)	16	320*
GP-71	4-6'	160	--
GP-72	6-8'	220	--
GP-84	2-4'	2.6	--
	6-8'	2.5	
RW-2	--		270
RW-3	--		190
RW-5	2-4'	230	
	6-8'	160	190
	10-12'	58	
REC 14			
MW-10	6-8'	65	79
REC 15			
GP-34	0-2'	***520***	--
GP-36	0-2'	***1,800***	170*
GP-37	0-2'	47	--
GP-73	2-4'	***450***	--
GP-74	2-4'	240	--
GP-75	4-6'	140	230
GP-99	2-4'	310	--
	6-8'	40	

Footnotes on Page 5.

Table 3. Summary of Barium Soil and Groundwater Concentrations, Former Meritor Facility, 1005 High Avenue, Oshkosh, Wisconsin.

ID	Soil Sample Depth	Soil Concentration	Groundwater Concentration
REC 15 (continued)			
GP-100	2-4'	230	--
	6-8'	86	
REC 16			
GP-6	--	--	147*
GP-7	--	--	127*
GP-8	--	--	203*
GP-76	4-6'	130	260
GP-101	0-2'	8	38
	4-6'	10	
GP-102	2-4'	9.4	--
	6-8'	9.1	
MW-6	6-8'	130	240
REC 17			
GP-10	--	--	180*
GP-11	2-4'	***2,820***	310*
GP-12	8-10'	209	**6,970***
GP-55	--	--	**8,100**
GP-77	2-4'	***1,100***	--
GP-78	2-4'	***2,300***	--
GP-79	2-4'	58	--
GP-89	2-4'	110	--
	6-8'	100	
GP-90	2-4'	110	--
	6-8'	54	
GP-91	2-4'	59	980
	6-8'	99	
	10-13'	6.4	
GP-92	2-4'	12	710
	6-8'	6.3	
	10-13'	14	
GP-93	2-4'	12	650
	4-6'	***740***	
	8-10'	55	
GP-94	0-2'	***470***	<0.61
	6-8'	77	
	10-13'	17	
MW-4	0-2'	75	250
MW-8	2-4'	***1,660***	**12,000**
MW-11	4-6'	97	130
MW-13	2-4'	190	340
	6-8'	130	
	10-13'	59	

Footnotes on Page 5.

Table 3. Summary of Barium Soil and Groundwater Concentrations, Former Meritor Facility, 1005 High Avenue, Oshkosh, Wisconsin.

ID	Soil Sample Depth	Soil Concentration	Groundwater Concentration
REC 17 **(continued)**			
MW-14	2-4'	65	
	6-8'	0.27	150
	10-13'	59	
MW-15	0-2'	***750***	
	4-6'	***470***	**2,300**
	10-12'	38	
MW-16	2-4'	110	460
	6-8'	***870***	
	10-13'	68	
MW-17	2-4'	88	790
	6-8'	54	
	10-13'	56	
MW-18	1-2'	100	
	4-6'	310	
MW-19	3-4'	83	
	6-8'	100	
MW-20	2-4'	22	
	6-8'	13	
REC 18			
GP-103	2-4'	***370***	--
	6-8'	62	
GP-104	2-4'	150	--
	6-8'	58	
GP-105	2-4'	93	--
	6-8'	140	
GP-106	0-2'	25	--
	4-6'	20	
MW-12	2-4'	66	290

* Groundwater sample collected from a Geoprobe temporary well.

-- Not analyzed.

[ ] Groundwater concentration exceeds the NR 140 Preventive Action Limit of 400 µg/L.

BOLD Barium soil concentration exceeds soil to groundwater pathway of 330 mg/kg.

BOLD Groundwater concentration exceeds the NR 140 Enforcement Standard of 2,000 µg/L.

Soil Concentrations are in milligrams per kilogram (mg/kg).

Groundwater concentrations are in micrograms per liter (µg/L).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	Specific	GP-29	GP-32	GP-33	GP-44	GP-46	GP-50	GP-51	
Sample ID	NR 720	GP-29 2-4'	GP-32 2-4'	GP-33 2-4'	GP-44 0-4'	GP-46 2-4'	GP-50 0-2'	GP-51 0-2'	GP-51 2-4'
Sample Date	IND RCL	01/14/02	01/15/02	01/15/02	01/16/02	04/18/06	04/18/06	04/18/06	04/18/06
Acenaphthene	6.E+08	<19	<19	<18	<18	<53	<2,200	<2,200	<350
Acenaphthylene	3.6.E+06	18	19	<13	<13	<90	<3,700	<3,700	<590
Anthracene	3.0.E+09	<14	24	25	<13	<5.3	<220	260	380
Benzo(a)anthracene	39,000	25	120	38	<15	17	600	1,000	950
Benzo(a)pyrene	3,900	<14	120	50	<13	26	550	1,100	930
Benzo(b)fluoranthene	39,000	<13	99	35	<12	16	<220	370	580
Benzo(g,h,i)perylene	390,000	<13	88	21	<12	16	620	580	590
Benzo(k)fluoranthene	390,000	<15	120	31	<14	21	300	380	440
Chrysene	3.9.E+06	56	260	120	<15	14	270	620	790
Dibenzo(a,h)anthracene	3,900	<13	40	<12	13	4	<330	<320	96
Fluoranthene	4.0.E+08	<12	170	76	<11	32	1,200	2,200	2,700
Fluorene	4.0.E+08	<14	31	17	<13	<11	<430	<430	140
Indeno(1,2,3-cd)pyrene	39,000	<13	82	20	14	16	260	560	580
1-Methylnaphthalene	7.E+08	<16	84	46	<15	<32	<1,300	<1,300	<210
2-Methylnaphthalene	4.0.E+08	<14	120	67	<13	<27	<1,100	<1,100	830
Naphthalene	39,000	<20	180	35	<18	16	<1,300	<1,300	<210
Phenanthrene	3.9.E+06	<13	250	140	<12	18	670	970	1,400
Pyrene	3.0.E+08	170	260	150	<13	26	350	1,300	1,700
Total PAH Concentrations		269	2,067	871	27	222	4,820	9,340	12,106

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-52		GP-53	GP-57	GP-59	GP-62	GP-63	GP-64	GP-65
Sample ID	GP-52 0-2'	GP-52 2-4'	GP-53 2-4'	GP-57 0-2'	GP-59 2-4'	GP-62 2-4'	GP-63 2-4'	GP-64 2-4'	GP-65 0-2'
Sample Date	04/18/06	04/18/06	04/18/06	04/20/06	04/20/06	04/21/06	04/19/06	04/19/06	04/20/06
Acenaphthene	<990	850	690	<150	<130	<150	<54	<2,100	<130
Acenaphthylene	<1,700	<2,900	<950	<260	<230	<260	<92	<3,600	<220
Anthracene	<99	380	1,400	90	48	36	<5.4	2,600	<13
Benzo(a)anthracene	870	1,100	4,300	1,400	<13	140	<5.4	3,500	<13
Benzo(a)pyrene	<99	1,000	110	120	<13	120	<5.4	1,800	<13
Benzo(b)fluoranthene	<99	850	150	<15	<13	79	<5.4	1,300	<13
Benzo(g,h,i)perylene	<99	830	100	<15	<13	89	<5.4	830	<13
Benzo(k)fluoranthene	<99	530	97	86	<13	56	<5.4	460	<13
Chrysene	260	940	1,400	140	<13	110	<5.4	2,400	<13
Dibenzo(a,h)anthracene	<150	130	<84	<23	<20	<23	<8.1	<320	<20
Fluoranthene	410	2,600	7,100	400	260	330	<11	12,000	<26
Fluorene	<200	<340	2,100	<31	<27	<31	<11	3,000	<26
Indeno(1,2,3-cd)pyrene	<99	770	68	<15	<13	80	<5.4	660	<13
1-Methylnaphthalene	<600	<1,000	9,900	<92	<81	<93	<33	2,100	<79
2-Methylnaphthalene	<500	1,400	13,000	<76	<67	<77	<27	9,400	<66
Naphthalene	<600	<1,000	2,500	46	<81	<93	<33	2,100	<79
Phenanthrene	190	1,700	5,300	180	110	260	<5.4	13,000	<13
Pyrene	1,000	1,600	4,000	200	56	200	<5.4	5,600	<13
Total PAH Concentrations	2,730	14,680	52,215	2,662	474	1,500	0	60,750	0

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-66	GP-67	GP-68	GP-69	GP-70	GP-71	GP-72	GP-73	
Sample ID	GP-66 0-2'	GP-67 0-2'	GP-68 0-2'	GP-69 0-2'	GP-70 0-2'	GP-71 0-2'	GP-72 2-4'	GP-73 0-2'	GP-73 2-4'
Sample Date	04/18/06	04/18/06	04/18/06	04/20/06	04/20/06	04/18/06	04/19/06	04/21/06	04/21/06
Acenaphthene	100	<550	<790	<150	<270	<53	<140	<140	<1,700
Acenaphthylene	<90	<540	<1,300	<260	<450	<90	<230	<230	<3,000
Anthracene	130	86	98	<15	<27	<5.3	16	<14	<170
Benzo(a)anthracene	360	490	540	60	<27	<5.3	56	<14	510
Benzo(a)pyrene	340	480	550	71	<27	<5.3	57	<14	560
Benzo(b)fluoranthene	330	370	450	61	<27	<5.3	43	<14	490
Benzo(g,h,i)perylene	250	510	590	54	<27	<5.3	47	<14	790
Benzo(k)fluoranthene	170	230	310	41	<27	<5.3	29	<14	<170
Chrysene	310	390	410	65	<27	<5.3	47	<14	460
Dibenzo(a,h)anthracene	44	<82	140	<23	<40	<8	<20	<20	<260
Fluoranthene	870	910	990	170	<53	<11	130	<27	1,300
Fluorene	49	55	<160	<31	<53	<11	<27	<27	<350
Indeno(1,2,3-cd)pyrene	260	460	560	66	<27	<5.3	46	<14	440
1-Methylnaphthalene	60	<330	<470	<93	<160	<32	<82	<82	<1,000
2-Methylnaphthalene	380	780	<390	<77	<130	<27	<68	<68	<870
Naphthalene	<32	<330	<470	<93	<160	<32	<82	<82	<1,000
Phenanthrene	540	460	410	110	<27	<5.3	100	<14	770
Pyrene	560	580	640	160	<27	<5.3	85	<14	850
Total PAH Concentrations	4,753	5,801	5,688	858	0	0	656	0	6,170

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Because we care
100% recycled paper produced by wind power energy

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-74		GP-75	GP-76	GP-77	GP-78	GP-79	GP-80	GP-81
Sample ID	GP-74 0-2'	GP-74 2-4'	GP-75 0-2'	GP-76 2-4'	GP-77 2-4'	GP-78 2-4'	GP-79 2-4'	GP-80 0-2'	GP-81 2-4'
Sample Date	04/21/06	04/21/06	04/21/06	04/19/06	04/18/06	04/18/06	04/18/06	05/03/07	05/03/07
Acenaphthene	<57	<540	170	<280	<4,300	<120	<230	<54	250
Acenaphthylene	<97	<920	<94	<470	<7,300	<210	<390	<91	50
Anthracene	20	390	250	110	5,800	130	46	<5.4	580
Benzo(a)anthracene	79	1,200	440	190	13,000	580	190	<5.4	1,700
Benzo(a)pyrene	65	1,000	400	170	**15,000**	670	180	<5.4	1,700
Benzo(b)fluoranthene	55	730	290	120	9,800	520	130	<5.4	1,300
Benzo(g,h,i)perylene	51	720	230	120	12,000	600	120	<5.4	990
Benzo(k)fluoranthene	28	500	150	93	7,400	400	90	<5.4	830
Chrysene	59	910	350	180	11,000	520	150	<5.4	1,500
Dibenzo(a,h)anthracene	8.7	140	51	<42	1,800	92	<34	<8.1	200
Fluoranthene	150	3,000	1,000	590	32,000	1,500	500	<11	3,800
Fluorene	<11	240	130	<56	2,900	70	23	<11	110
Indeno(1,2,3-cd)pyrene	51	640	240	120	9,700	540	120	<5.4	1,100
1-Methylnaphthalene	<34	<330	51	<170	<2,600	<74	<140	<32	97
2-Methylnaphthalene	<29	1,300	500	260	14,000	410	<110	<27	520
Naphthalene	<34	400	230	<170	<2,600	<74	<140	<32	470
Phenanthrene	87	2300	850	510	22,000	870	130	<5.4	2,200
Pyrene	87	2100	650	400	23,000	1200	380	<5.4	3,200
Total PAH Concentrations	741	15,570	5,982	2,863	**179,400**	8,102	2,059	0	20,597

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-82	GP-83	GP-84	GP-85	GP-86	GP-87	GP-89	GP-90	GP-91
Sample ID	GP-82 2-4'	GP-83 2-4'	GP-84 2-4'	GP-85 2-4'	GP-86 2-4'	GP-87 0-2'	GP-89 2-4'	GP-90 2-4'	GP-91 2-4'
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
Acenaphthene	<53	<140	<65	<80	33,000	<460	<75	<82	<130
Acenaphthylene	<90	<230	<110	<140	12,000	<780	<130	<140	<230
Anthracene	<5.3	20	<6.5	<8	100,000	<46	<7.5	<8.2	<13
Benzo(a)anthracene	<5.3	190	<6.5	20	**180,000**	<46	<7.5	<8.2	24
Benzo(a)pyrene	<5.3	110	<6.5	20	**180,000**	<46	9.1	<8.2	58
Benzo(b)fluoranthene	<5.3	47	<6.5	16	**130,000**	<46	12	<8.2	32
Benzo(g,h,i)perylene	<5.3	<14	<6.5	9.7	110,000	<46	<7.5	<8.2	74
Benzo(k)fluoranthene	<5.3	<14	<6.5	9.3	85,000	<46	<7.5	<8.2	29
Chrysene	<5.3	140	<6.5	18	170,000	<46	<7.5	<8.2	34
Dibenzo(a,h)anthracene	<7.9	<20	<9.8	<12	**18,000**	<69	<11	<12	<20
Fluoranthene	<11	430	<13	44	610,000	<92	18	<16	92
Fluorene	<11	91	<13	<16	87,000	<92	<15	<16	<27
Indeno(1,2,3-cd)pyrene	<5.3	<14	<6.5	14	**120,000**	<46	<7.5	<8.2	52
1-Methylnaphthalene	<32	<81	<39	<48	40,000	<280	<45	<49	<81
2-Methylnaphthalene	<26	<68	<33	<40	300,000	<230	<38	<41	<67
Naphthalene	<32	<81	<39	<48	**92,000**	<280	<45	<49	<81
Phenanthrene	<5.3	140	<6.5	19	510,000	<46	11	<8.2	45
Pyrene	<5.3	110	<6.5	29	420,000	<46	14	<8.2	130
Total PAH Concentrations	0	1,278	0	199	**3,197,000**	0	64	0	570

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-92	GP-93	GP-94	GP-95	GP-96	GP-98	GP-99	GP-100
Sample ID	GP-92 2-4'	GP-93 2-4'	GP-94 0-2'	GP-95 2-4'	GP-96 2-4'	GP-98 0-2'	GP-99 2-4'	GP-100 2-4'
Sample Date	05/03/07	05/03/07	05/03/07	05/01/07	05/01/07	05/03/07	05/03/07	05/01/07
Acenaphthene	<64	<73	<82	<53	<280	<200	<250	<85
Acenaphthylene	<110	<120	<140	<90	<470	<340	<430	<140
Anthracene	<6.4	19	86	<5.3	<240	<20	640	<8.5
Benzo(a)anthracene	24	110	1,400	<5.3	<28	64	1,700	<8.5
Benzo(a)pyrene	28	230	270	<5.3	<28	76	1,600	<8.5
Benzo(b)fluoranthene	24	170	120	<5.3	<28	59	930	<8.5
Benzo(g,h,i)perylene	18	200	150	<5.3	<28	82	780	<8.5
Benzo(k)fluoranthene	12	110	<8.2	<5.3	<28	41	720	<8.5
Chrysene	22	120	190	<5.3	<28	53	1,400	<8.5
Dibenzo(a,h)anthracene	<9.6	37	42	<8	<42	<30	180	<13
Fluoranthene	59	210	910	<11	<55	120	3,300	<17
Fluorene	<13	<15	57	<11	97	<40	<50	<17
Indeno(1,2,3-cd)pyrene	20	200	130	<5.3	<28	63	920	<8.5
1-Methylnaphthalene	<38	45	<49	<32	270	<120	<150	<51
2-Methylnaphthalene	<32	89	<41	<27	490	<100	<130	<43
Naphthalene	<38	<44	<49	<53	<560	<120	<150	<51
Phenanthrene	31	70	300	<5.3	440	48	1,400	<8.5
Pyrene	48	120	88	<5.3	<28	100	3,200	<8.5
Total PAH Concentrations	286	1,730	3,743	0	1,297	706	16,770	0

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Because we care
100% recycled paper produced by wind power energy

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-101	GP-102	GP-103	GP-104	GP-105	GP-106	GP-107	GP-108	GP-109
Sample ID	GP-101 0-2'	GP-102 2-4'	GP-103 2-4'	GP-104 2-4'	GP-105 2-4'	GP-106 0-2'	GP-107 0-2	GP-108 0-2	GP-109 2-4
Sample Date	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	06/15/09	06/15/09	06/15/09
Acenaphthene	<69	<72	<130	<1,100	<460	<90	<240	<240	<82
Acenaphthylene	<120	<120	<220	<1,800	<790	<150	<400	<400	<140
Anthracene	<6.9	<7.2	25	370	610	<9.0	150	78	12
Benzo(a)anthracene	8.2	7.3	150	1,700	1,900	11	520	270	180
Benzo(a)pyrene	12	52	170	1,900	2,300	25	670	200	44
Benzo(b)fluoranthene	8.2	59	130	1,400	1,800	17	960	500	49
Benzo(g,h,i)perylene	7.6	93	120	1,300	1,300	31	740	220	37
Benzo(k)fluoranthene	<6.9	47	200	970	1,200	<9.0	530	100	85
Chrysene	8.5	16	140	1,700	2,000	19	1200	700	96
Dibenzo(a,h)anthracene	5	17	27	280	280	<14	80	<36	<12
Fluoranthene	26	29	360	4,700	6,200	69	2,300	1,000	160
Fluorene	7	<14	<26	250	460	<18	110	53	130
Indeno(1,2,3-cd)pyrene	9.1	60	120	1,400	1,600	<9.0	900	330	37
1-Methylnaphthalene	<41	<43	130	<640	<280	130	780	270	220
2-Methylnaphthalene	<34	<36	330	<530	<230	<45	2,200	890	250
Naphthalene	<41	71	110	<640	<280	64	780	330	560
Phenanthrene	<6.9	12	180	2,200	3,700	<9.0	1,300	480	120
Pyrene	11	14	580	5,900	4,900	<9.0	2,400	1,300	190
Total PAH Concentrations	103	477	2,772	24,070	28,250	366	15,620	6,721	2,170

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Because we care
100% recycled paper produced by wind power energy

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-110	GP-111	GP-112	GP-113	GP-115	GP-117	GP-118	GP-119	GP-120	MW-1
Sample ID	GP-110 0-2	GP-111 0-2	GP-112 2-4	GP-113 2-4	GP-115 2-4	GP-117 2-4	GP-118 2-4	GP-119 2-4	GP-120 2-4	MW-1 2-4'
Sample Date	06/15/09	06/15/09	06/15/09	06/15/09	06/18/09	06/18/09	06/19/09	06/19/09	06/19/09	04/28/04
Acenaphthene	<270	<58	<130	310	<380	<56	<260	<53	<57	<61
Acenaphthylene	<450	<98	<220	<230	<640	<96	<450	<90	<97	<100
Anthracene	41	24	110	320	280	46	1,000	22	62	24
Benzo(a)anthracene	<27	130	140	1,200	1,200	160	10,000	490	2,000	208
Benzo(a)pyrene	<27	34	120	1,400	1,200	120	<26	<5.3	<5.7	208
Benzo(b)fluoranthene	<27	79	260	2,100	1,200	380	3,300	310	1,300	171
Benzo(g,h,i)perylene	<27	41	140	1,200	1,100	200	<26	<5.3	<5.7	183
Benzo(k)fluoranthene	<27	17	85	990	640	59	<26	240	430	110
Chrysene	<27	89	370	2,100	2,400	350	15,000	940	480	183
Dibenzo(a,h)anthracene	<40	<8.7	20	160	300	27	<39	<7.9	<8.5	40
Fluoranthene	450	370	1,100	4,900	4,400	590	16,000	260	1,300	465
Fluorene	<53	93	530	730	120	59	2,600	14	29	<12
Indeno(1,2,3-cd)pyrene	<27	26	110	1,300	1,600	220	<26	<5.3	<5.7	171
1-Methylnaphthalene	<160	190	150	530	330	300	3,000	100	84	<37
2-Methylnaphthalene	290	330	640	2,000	1,500	650	4,000	<32	84	183
Naphthalene	<160	150	380	990	690	420	5,100	<32	42	<31
Phenanthrene	180	170	500	1,600	2,600	360	5,500	83	260	159
Pyrene	630	270	1,300	4,900	4,900	640	23,000	320	1,200	452
Total PAH Concentrations	1,591	2,013	5,955	26,730	24,460	4,581	88,500	2,779	7,271	2,557

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	MW-3	MW-4	MW-5	MW-7	MW-8	MW-9	MW-12	MW-13	MW-14	MW-15
Sample ID	MW-3 2-4'	MW-4 0-2'	MW-5 2-4'	MW-7 2-4'	MW-8 2-4'	MW-9 2-4'	MW-12 2-4'	MW-13 2-4'	MW-14 2-4'	MW-15 0-2'
Sample Date	04/29/04	04/30/04	05/03/04	05/04/04	05/03/04	04/30/04	05/03/04	05/01/07	05/01/07	04/30/07
Acenaphthene	<57	75	<62	<58	7,970	130	331	<790	<140	<660
Acenaphthylene	<97	<92	<110	<98	500	<110	<260	<1,300	<240	<1,100
Anthracene	<5.7	62	11	58	9,750	156	100	<79	130	82
Benzo(a)anthracene	<5.7	183	50	32	29,700	964	723	330	270	330
Benzo(a)pyrene	<5.7	216	34	<5.8	**25,000**	938	753	510	270	410
Benzo(b)fluoranthene	<5.7	162	29	8.8	20,200	625	512	380	220	310
Benzo(g,h,i)perylene	<5.7	216	62	<5.8	14,300	742	572	590	240	270
Benzo(k)fluoranthene	<5.7	95	14	<5.8	13,100	430	361	200	150	200
Chrysene	<5.7	183	37	10	30,900	768	663	290	240	320
Dibenzo(a,h)anthracene	<8.6	39	<9.3	<8.7	3,570	143	78	<120	31	<99
Fluoranthene	<11	463	137	324	111,000	1,820	2,020	690	980	820
Fluorene	<11	25	<12	110	14,300	40	69	<160	66	<130
Indeno(1,2,3-cd)pyrene	<5.7	183	50	<5.8	16,600	651	542	410	180	280
1-Methylnaphthalene	<34	51	<37	359	6,420	130	<90	<470	<400	<390
2-Methylnaphthalene	<29	194	<31	683	49,900	781	2,620	<400	<500	<330
Naphthalene	<29	41	<31	706	809	78	<75	<470	<85	<390
Phenanthrene	<5.7	237	73	243	103,000	677	753	410	580	310
Pyrene	<5.7	366	137	336	97,500	2080	2,050	460	600	570
Total PAH Concentrations	0	2,791	634	2,870	**554,519**	11,153	12,147	4,270	3,957	3,902

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Because we care
100% recycled paper produced by wind power energy

Table 4. Comparison of Site-Wide Surface Soil PAH Analytical Results to s. NR 720.19(5)1 Site-Specific Industrial Direct Contact RCLs, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	MW-16	MW-17	MW-22	MW-25	RW-4	RW-5	GP-WL-1	GP-WL-2	GP-WL-3	GP-WL-4
Sample ID	MW-16 2-4'	MW-17 2-4'	MW-22 2-4	MW-25 0-2	RW-4 2-4'	RW-5 2-4'	GP-WL-1 2-4	GP-WL-2 2-4	GP-WL-3 2-4	GP-WL-4 2-4
Sample Date	04/30/07	04/30/07	06/17/09	06/17/09	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07	05/03/07
Acenaphthene	<99	<59	<51	<50	<680	<73	<99	<99	<100	<67
Acenaphthylene	<170	<100	<88	<84	<1,200	<120	<170	<170	<160	<120
Anthracene	<9.9	100	<5.1	<5	140	180	61	31	<10	17
Benzo(a)anthracene	63	290	<5.1	24	580	640	190	270	32	69
Benzo(a)pyrene	93	<5.9	<5.1	18	510	620	170	270	39	41
Benzo(b)fluoranthene	67	<5.9	<5.1	18	550	440	120	290	35	41
Benzo(g,h,i)perylene	98	<5.9	<5.1	19	430	350	110	160	28	35
Benzo(k)fluoranthene	53	<5.9	<5.1	9.8	200	250	76	170	21	23
Chrysene	54	140	<5.1	31	480	550	150	250	36	56
Dibenzo(a,h)anthracene	22	<8.9	<7.7	<7.4	<100	72	26	46	<15	<10
Fluoranthene	91	1300	<10	63	1,200	1,500	380	340	96	120
Fluorene	<20	120	<10	<9.9	<140	39	<20	<20	<20	<13
Indeno(1,2,3-cd)pyrene	110	<5.9	<5.1	30	330	380	110	170	30	35
1-Methylnaphthalene	<59	190	<31	<30	<410	<44	<59	110	<61	87
2-Methylnaphthalene	<49	930	<31	<30	<340	320	<49	280	<51	180
Naphthalene	<59	50	<31	<30	<410	160	<59	110	<61	63
Phenanthrene	35	900	5.2	16	500	980	260	190	52	98
Pyrene	30	350	<5.1	81	690	1,600	1,000	280	100	55
Total PAH Concentrations	716	4,370	5	310	5,610	8,081	2,653	2,967	469	920

All concentrations are in micrograms per kilogram (µg/kg), unless otherwise indicated.

PAH Polycyclic Aromatic Hydrocarbons

BOLD Concentration exceeds site specific s. NR 720.19(5)1 Industrial Direct Contact (IND) Residual Contaminant Level (RCL).

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wiscon

Sample Location	BaP_{equiv} Relative	GP-29	GP-32	GP-33	GP-44	GP-46	GP-50	GP-51	
Sample ID	Potency	GP-29 2-4'	GP-32 2-4'	GP-33 2-4'	GP-44 0-4'	GP-46 2-4'	GP-50 0-2'	GP-51 0-2'	GP-51 2-4'
Sample Date	Factor	1/14/2002	1/15/2002	1/15/2002	1/16/2002	4/18/2006	4/18/2006	4/18/2006	4/18/2006
Acenaphthene	0.001	*9.5*	*9.5*	*9*	*9*	*26.5*	*1,100*	*1,100*	*175*
Acenaphthylene	0.001	18	19	*6.5*	*6.5*	*45*	*1,850*	*1,850*	*295*
Anthracene	0.01	*7*	24	25	*6.5*	*2.65*	*110*	260	380
Benzo(a)anthracene	0.1	25	120	38	*7.5*	17	600	1,000	950
Benzo(a)pyrene	1	*7*	120	50	*6.5*	26	550	1,100	930
Benzo(b)fluoranthene	0.1	*6.5*	99	35	*6*	16	*110*	370	580
Benzo(g,h,i)perylene	0.01	*6.5*	88	21	*6*	16	620	580	590
Benzo(k)fluoranthene	0.01	*7.5*	120	31	*7*	21	300	380	440
Chrysene	0.001	56	260	120	*7.5*	14	270	620	790
Dibenzo(a,h)anthracene	1	*6.5*	40	*6*	13	4	*165*	*160*	96
Fluoranthene	0.001	*6*	170	76	*5.5*	32	1,200	2,200	2,700
Fluorene	0.001	*7*	31	17	*6.5*	*5.5*	*215*	*215*	140
Indeno(1,2,3-cd)pyrene	0.1	*6.5*	82	20	14	16	260	560	580
1-Methylnaphthalene	0.001	*8*	84	46	*7.5*	*16*	*650*	*650*	*105*
2-Methylnaphthalene	0.001	*7*	120	67	*6.5*	*13.5*	*550*	*550*	830
Naphthalene	0.001	*10*	180	35	*9*	16	*650*	*650*	*105*
Phenanthrene	0.001	*6.5*	250	140	*6*	18	670	970	1,400
Pyrene	0.001	170	260	150	*6.5*	26	350	1,300	1,700
	BaP_{equiv} (µg/kg)	17.81	193.80	66.74	22.52	35.51	829.81	1,475.31	1,259.34

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-52		GP-53	GP-57	GP-59	GP-62	GP-63	GP-64	GP-65
Sample ID	GP-52 0-2'	GP-52 2-4'	GP-53 2-4'	GP-57 0-2'	GP-59 2-4'	GP-62 2-4'	GP-63 2-4'	GP-64 2-4'	GP-65 0-2'
Sample Date	4/18/2006	4/18/2006	4/18/2006	4/20/2006	4/20/2006	4/21/2006	4/19/2006	4/19/2006	4/20/2006
Acenaphthene	*495*	850	690	*75*	*65*	*75*	*27*	*1,050*	*65*
Acenaphthylene	*850*	*1,450*	*475*	*130*	*115*	*130*	*46*	*1,800*	*110*
Anthracene	*49.5*	380	1,400	90	48	36	*2.7*	2,600	*6.5*
Benzo(a)anthracene	870	1,100	4,300	1,400	*6.5*	140	*2.7*	3,500	*6.5*
Benzo(a)pyrene	*49.5*	1,000	110	120	*6.5*	120	*2.7*	1,800	*6.5*
Benzo(b)fluoranthene	*49.5*	850	150	*7.5*	*6.5*	79	*2.7*	1,300	*6.5*
Benzo(g,h,i)perylene	*49.5*	830	100	*7.5*	*6.5*	89	*2.7*	830	*6.5*
Benzo(k)fluoranthene	*49.5*	530	97	86	*6.5*	56	*2.7*	460	*6.5*
Chrysene	260	940	1,400	140	*6.5*	110	*2.7*	2,400	*6.5*
Dibenzo(a,h)anthracene	*75*	130	*42*	*11.5*	*10*	*11.5*	*4.05*	*160*	*10*
Fluoranthene	410	2,600	7,100	400	260	330	*5.5*	12,000	*13*
Fluorene	*100*	*170*	2,100	*15.5*	*13.5*	*15.5*	*5.5*	3,000	*13*
Indeno(1,2,3-cd)pyrene	*49.5*	770	68	*7.5*	*6.5*	80	*2.7*	660	*6.5*
1-Methylnaphthalene	*300*	*500*	9,900	*46*	*40.5*	*46.5*	*16.5*	2,100	*39.5*
2-Methylnaphthalene	*250*	1,400	13,000	*38*	*33.5*	*38.5*	*13.5*	9,400	*33*
Naphthalene	*300*	*500*	2,500	46	*40.5*	*46.5*	*16.5*	2,100	*39.5*
Phenanthrene	190	1,700	5,300	180	110	260	*2.7*	13,000	*6.5*
Pyrene	1,000	1,600	4,000	200	56	200	*2.7*	5,600	*6.5*
BaP_{equiv} (µg/kg)	227.04	1,431.11	666.24	276.11	19.80	164.46	7.78	2597.35	18.98

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-66	GP-67	GP-68	GP-69	GP-70	GP-71	GP-72	GP-73	
Sample ID	GP-66 0-2'	GP-67 0-2'	GP-68 0-2'	GP-69 0-2'	GP-70 0-2'	GP-71 0-2'	GP-72 2-4'	GP-73 0-2'	GP-73 2-4'
Sample Date	4/18/2006	4/18/2006	4/18/2006	4/20/2006	4/20/2006	4/18/2006	4/19/2006	4/21/2006	4/21/2006
Acenaphthene	100	*275*	*395*	*75*	*135*	*26.5*	*70*	*70*	*850*
Acenaphthylene	*45*	*470*	*650*	*130*	225	*45*	*115*	*115*	*1,500*
Anthracene	130	86	98	*7.5*	*13.5*	2.65	16	*7*	*85*
Benzo(a)anthracene	360	490	540	60	*13.5*	2.65	56	*7*	510
Benzo(a)pyrene	340	480	550	71	*13.5*	2.65	57	*7*	560
Benzo(b)fluoranthene	330	370	450	61	*13.5*	2.65	43	*7*	490
Benzo(g,h,i)perylene	250	510	590	54	*13.5*	2.65	47	*7*	790
Benzo(k)fluoranthene	170	230	310	41	*13.5*	2.65	29	*7*	*85*
Chrysene	310	390	410	65	*13.5*	2.65	47	*7*	460
Dibenzo(a,h)anthracene	44	*41.5*	140	*11.5*	*20*	*4*	*10*	*10*	*130*
Fluoranthene	870	910	990	170	*26.5*	*5.5*	130	*13.5*	1,300
Fluorene	49	55	*80*	*15.5*	*26.5*	*5.5*	*13.5*	*13.5*	*175*
Indeno(1,2,3-cd)pyrene	260	460	560	66	*13.5*	2.65	46	*7*	440
1-Methylnaphthalene	60	*165*	*235*	*46.5*	*80*	*16*	*41*	*41*	*500*
2-Methylnaphthalene	380	780	*195*	*38.5*	*65*	*13.5*	*34*	*34*	*435*
Naphthalene	*16*	*165*	*235*	*46.5*	*80*	*16*	*41*	*41*	*500*
Phenanthrene	540	460	410	110	*13.5*	2.65	100	*7*	770
Pyrene	560	580	640	160	*13.5*	2.65	85	*7*	850
BaP_{equiv} (µg/kg)	487.43	666.01	859.22	103.08	38.63	7.66	83.10	19.66	850.94

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-74		GP-75	GP-76	GP-77	GP-78	GP-79	GP-80	GP-81
Sample ID	GP-74 0-2'	GP-74 2-4'	GP-75 0-2'	GP-76 2-4'	GP-77 2-4'	GP-78 2-4'	GP-79 2-4'	GP-80 0-2'	GP-81 2-4'
Sample Date	4/21/2006	4/21/2006	4/21/2006	4/19/2006	4/18/2006	4/18/2006	4/18/2006	5/3/2007	5/3/2007
Acenaphthene	*28.5*	*270*	170	*140*	*2,150*	*60*	*115*	*27*	250
Acenaphthylene	*48.5*	*460*	*47*	*235*	*3,650*	*105*	*195*	*45.5*	50
Anthracene	20	390	250	110	5,800	130	46	*2.7*	580
Benzo(a)anthracene	79	1,200	440	190	13,000	580	190	*2.7*	1,700
Benzo(a)pyrene	65	1,000	400	170	15,000	670	180	*2.7*	1,700
Benzo(b)fluoranthene	55	730	290	120	9,800	520	130	*2.7*	1,300
Benzo(g,h,i)perylene	51	720	230	120	12,000	600	120	*2.7*	990
Benzo(k)fluoranthene	28	500	150	93	7,400	400	90	*2.7*	830
Chrysene	59	910	350	180	11,000	520	150	*2.7*	1,500
Dibenzo(a,h)anthracene	8.7	140	51	*21*	1,800	92	*17*	*4.05*	200
Fluoranthene	150	3,000	1,000	590	32,000	1,500	500	*5.5*	3,800
Fluorene	*5.5*	240	130	*28*	2,900	70	23	*5.5*	110
Indeno(1,2,3-cd)pyrene	51	640	240	120	9,700	540	120	*2.7*	1,100
1-Methylnaphthalene	*17*	*165*	51	*85*	*1,300*	*37*	*70*	*16*	97
2-Methylnaphthalene	*14.5*	1,300	500	260	14,000	410	*55*	*13.5*	520
Naphthalene	*17*	400	230	*85*	*1,300*	*37*	*70*	*16*	470
Phenanthrene	87	2300	850	510	22,000	870	130	*2.7*	2,200
Pyrene	87	2100	650	400	23,000	1200	380	*2.7*	3,200
BaP_{equiv} (µg/kg)	93.70	1,424.25	558.28	239.74	**20,415.30**	942.11	245.25	7.78	2,346.20

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-82	GP-83	GP-84	GP-85	GP-86	GP-87	GP-89	GP-90	GP-91
Sample ID	GP-82 2-4'	GP-83 2-4'	GP-84 2-4'	GP-85 2-4'	GP-86 2-4'	GP-87 0-2'	GP-89 2-4'	GP-90 2-4'	GP-91 2-4'
Sample Date	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007
Acenaphthene	*26.5*	*70*	*32.5*	*40*	33,000	*230*	*37.5*	*41*	*65*
Acenaphthylene	*45*	*115*	*55*	*70*	12,000	*390*	*65*	*70*	*115*
Anthracene	*2.65*	20	*3.25*	*4*	100,000	*23*	*3.75*	*4.1*	*6.5*
Benzo(a)anthracene	*2.65*	190	*3.25*	20	180,000	*23*	*3.75*	*4.1*	24
Benzo(a)pyrene	*2.65*	110	*3.25*	20	180,000	*23*	9.1	*4.1*	58
Benzo(b)fluoranthene	*2.65*	47	*3.25*	16	130,000	*23*	12	*4.1*	32
Benzo(g,h,i)perylene	*2.65*	*7*	*3.25*	9.7	110,000	*23*	*3.75*	*4.1*	74
Benzo(k)fluoranthene	*2.65*	*7*	*3.25*	9.3	85,000	*23*	*3.75*	*4.1*	29
Chrysene	*2.65*	140	*3.25*	18	170,000	*23*	*3.75*	*4.1*	34
Dibenzo(a,h)anthracene	*3.95*	*10*	*4.9*	*6*	18,000	*34.5*	*5.5*	*6*	*10*
Fluoranthene	*5.5*	430	*6.5*	44	610,000	*46*	18	*8*	92
Fluorene	*5.5*	91	*6.5*	*8*	87,000	*46*	*7.5*	*8*	*13.5*
Indeno(1,2,3-cd)pyrene	*2.65*	*7*	*3.25*	14	120,000	*23*	*3.75*	*4.1*	52
1-Methylnaphthalene	*16*	*40.5*	*19.5*	*24*	40,000	*140*	*22.5*	*24.5*	*40.5*
2-Methylnaphthalene	*13*	*34*	*16.5*	*20*	300,000	*115*	*19*	*20.5*	*33.5*
Naphthalene	*16*	*40.5*	*19.5*	*24*	92,000	*140*	*22.5*	*24.5*	*40.5*
Phenanthrene	*2.65*	140	*3.25*	19	510,000	*23*	11	*4.1*	45
Pyrene	*2.65*	110	*3.25*	29	420,000	*23*	14	*4.1*	130
BaP_{equiv} (µg/kg)	7.61	145.95	9.39	31.53	**246,224**	66.27	16.88	11.66	80.50

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-92	GP-93	GP-94	GP-95	GP-96	GP-98	GP-99	GP-100
Sample ID	GP-92 2-4'	GP-93 2-4'	GP-94 0-2'	GP-95 2-4'	GP-96 2-4'	GP-98 0-2'	GP-99 2-4'	GP-100 2-4'
Sample Date	5/3/2007	5/3/2007	5/3/2007	5/1/2007	5/1/2007	5/3/2007	5/3/2007	5/1/2007
Acenaphthene	*32*	*36.5*	*41*	*26.5*	*140*	*100*	*125*	*42.5*
Acenaphthylene	55	*60*	*70*	*45*	*235*	*170*	*215*	*70*
Anthracene	*3.2*	19	86	*2.65*	*120*	*10*	640	*4.25*
Benzo(a)anthracene	24	110	1400	*2.65*	*14*	64	1,700	*4.25*
Benzo(a)pyrene	28	230	270	*2.65*	*14*	76	1,600	*4.25*
Benzo(b)fluoranthene	24	170	120	*2.65*	*14*	59	930	*4.25*
Benzo(g,h,i)perylene	18	200	150	*2.65*	*14*	82	780	*4.25*
Benzo(k)fluoranthene	12	110	*4.1*	*2.65*	*14*	41	720	*4.25*
Chrysene	22	120	190	*2.65*	*14*	53	1,400	*4.25*
Dibenzo(a,h)anthracene	*4.8*	37	42	*4*	*21*	*15*	180	*6.5*
Fluoranthene	59	210	910	*5.5*	*27.5*	120	3,300	*8.5*
Fluorene	*6.5*	*7.5*	57	*5.5*	97	*20*	*25*	*8.5*
Indeno(1,2,3-cd)pyrene	20	200	130	*2.65*	*14*	63	920	*4.25*
1-Methylnaphthalene	*19*	45	*24.5*	*16*	270	*60*	*75*	*25.5*
2-Methylnaphthalene	*16*	89	*20.5*	*13.5*	490	*50*	65	*21.5*
Naphthalene	*19*	*22*	*24.5*	*26.5*	*280*	*60*	*75*	*25.5*
Phenanthrene	31	70	300	*2.65*	440	48	1,400	*4.25*
Pyrene	48	120	88	*2.65*	*14*	100	3,200	*4.25*
BaP_{equiv} (µg/kg)	40.24	319.07	481.13	7.67	42.69	111.71	2,166.28	12.37

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-101	GP-102	GP-103	GP-104	GP-105	GP-106	GP-107	GP-108	GP-109
Sample ID	GP-101 0-2'	GP-102 2-4'	GP-103 2-4'	GP-104 2-4'	GP-105 2-4'	GP-106 0-2'	GP-107 0-2	GP-108 0-2	GP-109 2-4
Sample Date	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	5/3/2007	6/15/2009	6/15/2009	6/15/2009
Acenaphthene	*34.5*	*36*	*65*	*550*	*230*	*45*	*120*	*120*	*41.5*
Acenaphthylene	*60*	*60*	*110*	*900*	*395*	*75*	*200*	*200*	*70*
Anthracene	*3.45*	*3.6*	25	370	610	*4.5*	150	78	12
Benzo(a)anthracene	8.2	7.3	150	1,700	1,900	11	520	270	180
Benzo(a)pyrene	12	52	170	1,900	2,300	25	670	200	44
Benzo(b)fluoranthene	8.2	59	130	1,400	1,800	17	960	500	49
Benzo(g,h,i)perylene	7.6	93	120	1,300	1,300	31	740	220	37
Benzo(k)fluoranthene	*3.45*	47	200	970	1,200	*4.5*	530	100	85
Chrysene	8.5	16	140	1,700	2,000	19	1200	700	96
Dibenzo(a,h)anthracene	5	17	27	280	280	*7*	80	*18*	*6*
Fluoranthene	26	29	360	4,700	6,200	69	2,300	1,000	160
Fluorene	*7*	*7*	*13*	250	460	*9*	110	53	130
Indeno(1,2,3-cd)pyrene	9.1	60	120	1,400	1,600	*4.5*	900	330	37
1-Methylnaphthalene	*20.5*	*21.5*	130	*320*	*140*	130	780	270	220
2-Methylnaphthalene	*17*	*18*	330	*265*	*115*	*22.5*	2,200	890	250
Naphthalene	*20.5*	71	110	*320*	*140*	64	780	330	560
Phenanthrene	*3.45*	12	180	2,200	3,700	*4.5*	1,300	480	120
Pyrene	11	14	580	5,900	4,900	*4.5*	2,400	1,300	190
BaP_{equiv} (µg/kg)	19.90	83.35	242.47	2,673.51	3,159.38	36.09	1,013.59	337.32	79.78

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	GP-110	GP-111	GP-112	GP-113	GP-115	GP-117	GP-118	GP-119	GP-120	MW-1
Sample ID	GP-110 0-2	GP-111 0-2	GP-112 2-4	GP-113 2-4	GP-115 2-4	GP-117 2-4	GP-118 2-4	GP-119 2-4	GP-120 2-4	MW-1 2-4'
Sample Date	6/15/2009	6/15/2009	6/15/2009	6/15/2009	6/18/2009	6/18/2009	6/19/2009	6/19/2009	6/19/2009	4/28/2004
Acenaphthene	*135*	*29*	*65*	310	*190*	*28*	*130*	*26.5*	*28.5*	*30.5*
Acenaphthylene	*225*	*49*	*110*	*115*	*320*	*48*	*225*	*45*	*48.5*	*50*
Anthracene	41	24	110	320	280	46	1,000	22	62	24
Benzo(a)anthracene	*13.5*	130	140	1,200	1,200	160	10,000	490	2,000	208
Benzo(a)pyrene	*13.5*	34	120	1,400	1,200	120	*13*	*2.65*	*2.85*	208
Benzo(b)fluoranthene	*13.5*	79	260	2,100	1,200	380	3,300	310	1,300	171
Benzo(g,h,i)perylene	*13.5*	41	140	1,200	1,100	200	*13*	*2.65*	*2.85*	183
Benzo(k)fluoranthene	*13.5*	17	85	990	640	59	*13*	240	430	110
Chrysene	*13.5*	89	370	2,100	2,400	350	15,000	940	480	183
Dibenzo(a,h)anthracene	*20*	*4.35*	20	160	300	27	*19.5*	*3.95*	*4.25*	40
Fluoranthene	450	370	1,100	4,900	4,400	590	16,000	260	1,300	465
Fluorene	*26.5*	93	530	730	120	59	2,600	14	29	*6*
Indeno(1,2,3-cd)pyrene	*13.5*	26	110	1,300	1,600	220	*13*	*2.65*	*2.85*	171
1-Methylnaphthalene	*80*	190	150	530	330	300	3,000	100	84	*18.5*
2-Methylnaphthalene	290	330	640	2,000	1,500	650	4,000	*16*	84	183
Naphthalene	*80*	150	380	990	690	420	5,100	*16*	42	*15.5*
Phenanthrene	180	170	500	1,600	2,600	360	5,500	83	260	159
Pyrene	630	270	1,300	4,900	4,900	640	23,000	320	1,200	452
BaP_{equiv} (µg/kg)	40.34	64.41	199.50	2,063.28	1,937.65	229.50	1,448.62	91.33	345.89	307.73

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	MW-3	MW-4	MW-5	MW-7	MW-8	MW-9	MW-12	MW-13	MW-14	MW-15
Sample ID	MW-3 2-4'	MW-4 0-2'	MW-5 2-4'	MW-7 2-4'	MW-8 2-4'	MW-9 2-4'	MW-12 2-4'	MW-13 2-4'	MW-14 2-4'	MW-15 0-2'
Sample Date	4/29/2004	4/30/2004	5/3/2004	5/4/2004	5/3/2004	4/30/2004	5/3/2004	5/1/2007	5/1/2007	4/30/2007
Acenaphthene	*28.5*	75	*31*	*29*	7,970	130	331	*395*	*70*	*330*
Acenaphthylene	*48.5*	*46*	*55*	*49*	500	*55*	*130*	*650*	*120*	*550*
Anthracene	*2.85*	62	11	58	9,750	156	100	*39.5*	130	82
Benzo(a)anthracene	*2.85*	183	50	32	29,700	964	723	330	270	330
Benzo(a)pyrene	*2.85*	216	34	*2.9*	25,000	938	753	510	270	410
Benzo(b)fluoranthene	*2.85*	162	29	8.8	20,200	625	512	380	220	310
Benzo(g,h,i)perylene	*2.85*	216	62	*2.9*	14,300	742	572	590	240	270
Benzo(k)fluoranthene	*2.85*	95	14	*2.9*	13,100	430	361	200	150	200
Chrysene	*2.85*	183	37	10	30,900	768	663	290	240	320
Dibenzo(a,h)anthracene	*4.3*	39	*4.65*	*4.35*	3,570	143	78	*60*	31	*49.5*
Fluoranthene	*5.5*	463	137	324	111,000	1,820	2,020	690	980	820
Fluorene	*5.5*	25	*6*	110	14,300	40	69	*80*	66	*65*
Indeno(1,2,3-cd)pyrene	*2.85*	183	50	*2.9*	16,600	651	542	410	180	280
1-Methylnaphthalene	*17*	51	*18.5*	359	6,420	130	*45*	*235*	*200*	*195*
2-Methylnaphthalene	*14.5*	194	*15.5*	683	49,900	781	2,620	*200*	*250*	*165*
Naphthalene	*14.5*	41	*15.5*	706	809	78	*37.5*	*235*	*42.5*	*195*
Phenanthrene	*2.85*	237	73	243	103,000	677	753	410	580	310
Pyrene	*2.85*	366	137	336	97,500	2080	2,050	460	600	570
BaP_{equiv} (µg/kg)	8.23	313.21	52.95	15.11	**36,013.80**	1,324.84	1,027.75	693.94	376.35	560.54

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wisconsin.

Sample Location	MW-16	MW-17	MW-22	MW-25	RW-4	RW-5	GP-WL-1	GP-WL-2	GP-WL-3	GP-WL-4
Sample ID	MW-16 2-4'	MW-17 2-4'	MW-22 2-4	MW-25 0-2	RW-4 2-4'	RW-5 2-4'	GP-WL-1 2-4	GP-WL-2 2-4	GP-WL-3 2-4	GP-WL-4 2-4
Sample Date	4/30/2007	4/30/2007	6/17/2009	6/17/2009	5/3/2007	5/3/2007	05/03/07	05/03/07	05/03/07	05/03/07
Acenaphthene	*49.5*	*29.5*	*25.5*	*25*	*340*	*36.5*	*44.5*	*44.5*	*50*	*33.5*
Acenaphthylene	*85*	*50*	*44*	*42*	*600*	*60*	*85*	*85*	*80*	*60*
Anthracene	*4.95*	100	*2.55*	*2.5*	140	180	61	31	*5*	17
Benzo(a)anthracene	63	290	*2.55*	24	580	640	190	270	32	69
Benzo(a)pyrene	93	*2.95*	*2.55*	18	510	620	170	270	39	41
Benzo(b)fluoranthene	67	*2.95*	*2.55*	18	550	440	120	290	35	41
Benzo(g,h,i)perylene	98	*2.95*	*2.55*	19	430	350	110	160	28	35
Benzo(k)fluoranthene	53	*2.95*	*2.55*	9.8	200	250	76	170	21	23
Chrysene	54	140	*2.55*	31	480	550	150	250	36	56
Dibenzo(a,h)anthracene	22	*4.45*	*3.85*	*3.7*	*50*	72	26	46	*7.5*	*5*
Fluoranthene	91	1300	*5*	63	1,200	1,500	380	340	96	120
Fluorene	*10*	120	*5*	*4.95*	*70*	39	*10*	*10*	*10*	*6.5*
Indeno(1,2,3-cd)pyrene	110	*2.95*	*2.55*	30	330	380	110	170	30	35
1-Methylnaphthalene	*29.5*	190	*15.5*	*15*	*205*	*22*	*29.5*	110	*30.5*	87
2-Methylnaphthalene	*24.5*	930	*15.5*	*15*	*170*	320	*24.5*	280	*25.5*	180
Naphthalene	*29.5*	50	*15.5*	*15*	*205*	160	*29.5*	110	*30.5*	63
Phenanthrene	35	900	5.2	16	500	980	260	190	52	98
Pyrene	30	350	*2.55*	81	690	1,600	1,000	280	100	55
BaP_{equiv} (µg/kg)	141.00	42.11	7.38	29.52	718.16	851.07	242.48	394.31	57.25	62.01

Footnotes on Page 11.

Table 5. Benzo(a)pyrene Equivalent Assessment of Surface Soils in Accordance with s. NR 720.19(5)2, Former Meritor Facility, Oshkosh, Wiscon

BaP_{equiv} Minimum (µg/kg)	7.378
BaP_{equiv} Maximum (µg/kg)	246,224
BaP_{equiv} Median (µg/kg)	179
Sample Count	94
Standard Deviation	25,639
95% Upper Confidence Level	5,183
BaP_{equiv} Non-Industrial Ingestion RCL	880 µg/kg
BaP_{equiv} Industrial Ingestion RCL	3,900 µg/kg

BaP_{equiv}	Calculated benzo(a)pyrene equivalent concentration.
BOLD	Concentration exceeds the BaP_{equiv} Industrial Direct Contact RCL of 3,900 µg/kg.
	Concentration exceeds the BaP_{equiv} Non-Industrial Direct Contact RCL of 880 µg/kg.
Italic	Concentrations equal to one-half the detection limit were used in the calculations where sample results were reported below laboratory detection limits.
µg/kg	Micrograms per kilogram.

ARCADIS

Table 6. Benzo(a)pyrene Equivalent Residual Contaminant Level Calculations, Former Meritor Facility, Oshkosh, Wisconsin.

Risk-Based Algorithms for Soil Ingestion.

The default exposure factors used for direct ingestion of contaminated soil are those specified in s. NR 720.19(5), Wis. Adm. Code. The value for non-industrial and industrial exposure are the same as the default values used by U.S. EPA in the soil screening in level methodology (U.S. EPA 1996). (1)

Algorithm for Ingestion of Carcinogenic Contaminants in Non-Industrial Soil

Target Cancer Risk Level, TR (unitless)	1.00E-07		
Combined Target Cancer Risk Level for *in situ* contaminated soil	1.00E-05	Average Body Weight from, Age 1-6, BWc (kg)	15
Averaging Time, AT (yr)	70	Ingestion Rate of Soil Age 7-31, IRa (mg/d)	100
Exposure Frequency, EF (d/yr)	350	Exposure Duration from Age 7-31, EDa (yr)	24
Age-adjusted Soil Ingestion Factor, IFs (mg*yr/kg*d)	34	Average Adult Body Weight, BWa (kg)	70
Ingestion Rate of Soil Age 1-6, IRc (mg/d)	200		

Benzo(a)pyrene equivalent concentration - RCL ingestion, all PAHs detected, non-industrial

$$RCL = \frac{TR \times AT \times 365\ day/year}{SFo \times 10^{-6}\ kg/mg \times EF \times IFs}$$

$$RCL = \frac{(1*10^{-5})*70*365}{(7.3*10^{-6})*350*114} = \frac{0.2555}{0.29127}$$

= 0.88 mg/kg or 880 µg/kg

Algorithm for Ingestion of Carcinogenic Contaminants in Industrial Soil

Target Cancer Risk Level, TR (unitless)	1.00E-06	Exposure Duration, ED (yr)	25
Combined Target Cancer Risk Level for *in situ* contaminated soil	1.00E-05	Average Adult Body Weight, BWa (kg)	70
Averaging Time, AT (yr)	70		
Exposure Frequency, EF (d/yr)	250		
Ingestion Rate of Soil for Adult, IRa (mg/d)	100		

Benzo(a)pyrene equivalent concentration - RCL ingestion, all PAHs detected, industrial

$$RCL = \frac{TR \times BWa \times AT \times 365\ day/year}{SFo \times 10^{-6}\ kg/mg \times EF \times ED \times IRa}$$

$$RCL = \frac{(1*10^{-5})*70*70*70*365}{(7.3*10^{-6})*250*25*100} = \frac{17.885}{4.5625}$$

= 3.9 mg/kg or 3,900 µg/kg

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			EW-1						MW-1	
Sample Date	ES	PAL	06/16/04	05/04/06	08/14/06	02/14/07	05/09/07	01/14/10	06/16/04	05/05/06
VOC										
Benzene	5	0.5	<0.20	<0.20	<0.20	<0.25	NA	<0.20	<0.20	<1.0
1,2-Dichloroethane	5	0.5	<0.50	NA	NA	NA	NA	<0.50	<0.50	NA
Ethylbenzene	700	140	9.8	<0.50	<0.50	<0.22	NA	<0.50	<0.50	<2.5
Isopropylbenzene	--	--	<0.20	NA	NA	NA	NA	<0.20	<0.20	NA
Naphthalene	100	10	0.39	<0.25	0.32	NA	NA	<0.25	<0.25	<1.2
n-Propylbenzene	--	--	<0.50	NA	NA	NA	NA	<0.20	<0.50	NA
p-Isopropyltoluene	--	--	<0.20	NA	NA	NA	NA	<0.20	<0.20	NA
sec-Butylbenzene	--	--	<0.25	NA	NA	NA	NA	<0.25	<0.25	NA
Toluene	1,000	200	0.26	<0.20	<0.20	0.14 J	NA	<0.20	<0.20	<1.0
1,2,4-Trimethylbenzene	--	--	<0.20	<0.20	0.31	<0.25	NA	<0.20	<0.20	<1.0
1,3,5-Trimethylbenzene	--	--	<0.20	<0.20	<0.20	0.74	NA	<0.20	<0.20	<1.0
Trimethylbenzenes (Total)	480	96	<0.4	<0.4	0.31	0.74	NA	<0.4	<0.4	<2
Xylenes, Total	10,000	1,000	44	6.9	9	5.1	NA	<0.50	<0.50	<2.5
PAH										
Acenaphthene	--	--	<0.58	NA	NA	NA	NA	<0.33	<0.60	NA
Anthracene	3,000	600	0.22	NA	NA	NA	NA	0.049 J	<0.035	NA
Benzo (a) anthracene	--	--	<0.056	NA	NA	NA	NA	0.12 J	<0.058	NA
Benzo (a) pyrene	--	--	<0.033	NA	NA	NA	NA	<0.032	<0.034	NA
Benzo (k) fluoranthene	--	--	<0.059	NA	NA	NA	NA	<0.046	<0.061	NA
Chrysene	0.2	0.02	<0.049	NA	NA	NA	NA	<0.041	<0.050	NA
Fluoranthene	400	80	0.11	NA	NA	NA	NA	0.43	0.17	NA
Fluorene	400	80	0.26	NA	NA	NA	NA	0.19 J	<0.066	NA
1-Methylnaphthalene	--	--	<0.44	NA	NA	NA	NA	<0.32	<0.45	NA
2-Methylnaphthalene	--	--	0.74	NA	NA	NA	NA	<0.31	<0.31	NA
Naphthalene	100	10	0.29	NA	NA	NA	NA	<0.40	<0.27	NA
Phenanthrene	--	--	0.62	NA	NA	NA	NA	0.42	0.032	NA
Pyrene	250	50	0.048	NA	NA	NA	NA	<0.044	0.055	NA

Footnotes on Page 2.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			EW-1						MW-1	
Sample Date	ES	PAL	06/16/04	05/04/06	08/14/06	02/14/07	05/09/07	01/14/10	06/16/04	05/05/06
Metals										
Arsenic	10	1	<25	**16**	**14.8**	NA	**16**	NA	<25	**32**
Barium	2,000	400	200	200	220	NA	190	NA	600	450
Cadmium	5	0.5	2.5	<0.14	<0.14	NA	<0.14	NA	**8.6**	<0.14
Chromium	100	10	NA	NA	1.1	NA	<2.1	NA	NA	NA
Lead	15	1.5	<13	<1.4	NA	NA	<1.4	NA	<13	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-1 (continued)			MW-2					
Sample Date	ES	PAL	08/14/06	02/14/07	05/09/07	06/16/04	09/29/04	05/05/06	08/16/06	02/14/07	05/09/07
VOC											
Benzene	5	0.5	<0.20	<0.25	NA	<0.20	<0.20	<0.20	<0.20	<0.25	NA
1,2-Dichloroethane	5	0.5	NA	NA	NA	<0.50	<0.50	NA	NA	NA	NA
Ethylbenzene	700	140	<0.50	<0.22	NA	<0.50	<0.50	<0.50	<0.50	<0.22	NA
Isopropylbenzene	--	--	NA	NA	NA	<0.20	<0.20	NA	NA	NA	NA
Naphthalene	100	10	<0.25	NA	NA	<0.25	<0.25	<0.25	<0.25	NA	NA
n-Propylbenzene	--	--	NA	NA	NA	<0.50	<0.50	NA	NA	NA	NA
p-Isopropyltoluene	--	--	NA	NA	NA	<0.20	<0.20	NA	NA	NA	NA
sec-Butylbenzene	--	--	NA	NA	NA	<0.25	<0.25	NA	NA	NA	NA
Toluene	1,000	200	<0.20	<0.11	NA	0.27	<0.20	<0.20	<0.20	0.20 J	NA
1,2,4-Trimethylbenzene	--	--	<0.20	<0.25	NA	<0.20	<0.20	<0.20	0.2	<0.25	NA
1,3,5-Trimethylbenzene	--	--	<0.20	0.29 J	NA	<0.20	<0.20	<0.20	<0.20	0.29 J	NA
Trimethylbenzenes (Total)	480	96	<0.4	<0.25	NA	<0.4	<0.4	<0.4	<0.2	0.29 J	NA
Xylenes, Total	10,000	1,000	<0.50	<0.39	NA	<0.50	<0.50	<0.50	<0.50	0.42 J	NA
PAH											
Acenaphthene	--	--	NA	NA	NA	<0.66	<0.33	NA	NA	NA	NA
Anthracene	3,000	600	NA	NA	NA	<0.039	<0.038	NA	NA	NA	NA
Benzo (a) anthracene	--	--	NA	NA	NA	<0.064	<0.044	NA	NA	NA	NA
Benzo (a) pyrene	--	--	NA	NA	NA	<0.038	<0.032	NA	NA	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	NA	<0.064	<0.046	NA	NA	NA	NA
Chrysene	0.2	0.02	NA	NA	NA	<0.056	<0.041	NA	NA	NA	NA
Fluoranthene	400	80	NA	NA	NA	<0.027	<0.081	NA	NA	NA	NA
Fluorene	400	80	NA	NA	NA	<0.073	<0.062	NA	NA	NA	NA
1-Methylnaphthalene	--	--	NA	NA	NA	<0.50	<0.32	NA	NA	NA	NA
2-Methylnaphthalene	--	--	NA	NA	NA	<0.34	<0.31	NA	NA	NA	NA
Naphthalene	100	10	NA	NA	NA	<0.30	<0.40	NA	NA	NA	NA
Phenanthrene	--	--	NA	NA	NA	<0.023	<0.030	NA	NA	NA	NA
Pyrene	250	50	NA	NA	NA	0.065	<0.044	NA	NA	NA	NA

Footnotes on Page 4.

Because we care
100% recycled paper produced by wind power energy

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-1 (continued)			MW-2					
Sample Date	ES	PAL	08/14/06	02/14/07	05/09/07	06/16/04	09/29/04	05/05/06	08/16/06	02/14/07	05/09/07
Metals											
Arsenic	10	1	**46**	NA	**21**	<25	<0.79	7.4	9.18	**12**	8.9
Barium	2,000	400	190	NA	210	310	220	210	240	210	220
Cadmium	5	0.5	<0.14	NA	<0.14	3.1	<0.14	<0.14	<0.14	<0.14	<0.14
Chromium	100	10	0.74	NA	3.6 J	NA	NA	NA	0.73	NA	3.4 J
Lead	15	1.5	NA	NA	<1.4	<13	<1.4	<1.4	NA	<1.4	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-3							MW-4	
Sample Date	ES	PAL	06/15/04	09/29/04	05/04/06	08/16/06	02/13/07	05/09/07	06/23/09	06/15/04	09/28/04
VOC											
Benzene	5	0.5	<0.20	<0.20	<1.0	<0.20	<0.25	NA	NA	<0.20	<0.20
1,2-Dichloroethane	5	0.5	<0.50	<0.50	NA	NA	NA	NA	NA	<0.50	<0.50
Ethylbenzene	700	140	<0.50	<0.50	<2.5	<0.50	<0.22	NA	NA	<0.50	<0.50
Isopropylbenzene	--	--	<0.20	<0.20	NA	NA	NA	NA	NA	<0.20	<0.20
Naphthalene	100	10	<0.25	<0.25	<1.2	<0.25	NA	NA	NA	<0.25	<0.25
n-Propylbenzene	--	--	<0.50	<0.50	NA	NA	NA	NA	NA	<0.50	<0.50
p-Isopropyltoluene	--	--	<0.20	<0.20	NA	NA	NA	NA	NA	<0.20	<0.20
sec-Butylbenzene	--	--	<0.25	<0.25	NA	NA	NA	NA	NA	<0.25	<0.25
Toluene	1,000	200	<0.20	<0.20	<1.0	<0.20	0.18 J	NA	NA	<0.20	<0.20
1,2,4-Trimethylbenzene	--	--	<0.20	<0.20	<1.0	<0.20	<0.25	NA	NA	<0.20	<0.20
1,3,5-Trimethylbenzene	--	--	<0.20	<0.20	<1.0	<0.20	<0.19	NA	NA	<0.20	<0.20
Trimethylbenzenes (Total)	480	96	<0.4	<0.4	<2	<0.4	<0.44	NA	NA	<0.4	<0.4
Xylenes, Total	10,000	1,000	<0.50	<0.50	<2.5	<0.50	<0.39	NA	NA	<0.50	<0.50
PAH											
Acenaphthene	--	--	<0.65	<0.35	NA	NA	NA	<0.35 M8	<0.33	<0.58	<0.34
Anthracene	3,000	600	<0.038	<0.040	NA	NA	NA	<0.041 M8	<0.038	<0.034	<0.039
Benzo (a) anthracene	--	--	<0.063	<0.046	NA	NA	NA	<0.047	<0.044	<0.056	<0.045
Benzo (a) pyrene	--	--	<0.037	<0.034	NA	NA	NA	<0.034	<0.032	<0.033	<0.033
Benzo (k) fluoranthene	--	--	<0.047	<0.048	NA	NA	NA	<0.049	<0.046	<0.042	<0.047
Chrysene	0.2	0.02	<0.055	<0.043	NA	NA	NA	<0.044	<0.041	<0.049	<0.042
Fluoranthene	400	80	<0.027	<0.085	NA	NA	NA	<0.087	<0.083	<0.024	<0.083
Fluorene	400	80	<0.072	<0.065	NA	NA	NA	<0.067 M8	0.094 J	<0.064	<0.063
1-Methylnaphthalene	--	--	<0.49	<0.34	NA	NA	NA	<0.34 M8	<0.32	<0.44	<0.33
2-Methylnaphthalene	--	--	<0.34	<0.33	NA	NA	NA	<0.33 M8	<0.31	<0.30	<0.32
Naphthalene	100	10	<0.29	<0.42	NA	NA	NA	<0.43 M8	<0.40	<0.26	<0.41
Phenanthrene	--	--	<0.022	<0.032	NA	NA	NA	<0.032	0.15	<0.020	<0.031
Pyrene	250	50	<0.045	<0.046	NA	NA	NA	<0.047	<0.044	<0.040	<0.045

Footnotes on Page 6.

Because we care
100% recycled paper produced by wind power energy

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-3							MW-4	
Sample Date	ES	PAL	06/15/04	09/29/04	05/04/06	08/16/06	02/13/07	05/09/07	06/23/09	06/15/04	09/28/04
Metals											
Arsenic	10	1	<25	<0.79	2 J	3.29	3.7	<1	NA	<25	1.2
Barium	2,000	400	170	100	100	100	96	73	NA	610	340
Cadmium	5	0.5	2.4	<0.14	<0.14	1.9	0.15 J	<0.14	NA	6.8	<0.14
Chromium	100	10	NA	NA	NA	0.61 J	NA	3.2 J	NA	NA	NA
Lead	15	1.5	<13	<1.4	<1.4	NA	<1.4	<1.4	NA	<13	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-4 (continued)			MW-5					MW-6
Sample Date	ES	PAL	05/04/06	08/14/06	02/14/07	06/15/04	09/29/04	05/04/06	08/14/06	02/14/07	06/15/04
VOC											
Benzene	5	0.5	<1.0	<0.20	<0.25	<0.20	<0.20	<1.0	<0.20	<0.50	<0.20
1,2-Dichloroethane	5	0.5	NA	NA	NA	<0.50	<0.50	NA	NA	NA	<0.50
Ethylbenzene	700	140	<2.5	<0.50	<0.22	<0.50	<0.50	<2.5	<0.50	<0.44	<0.50
Isopropylbenzene	--	--	NA	NA	NA	<0.20	<0.20	NA	NA	NA	<0.20
Naphthalene	100	10	<1.2	<0.25	NA	<0.25	<0.25	<1.2	<0.25	NA	<0.25
n-Propylbenzene	--	--	NA	NA	NA	<0.50	<0.50	NA	NA	NA	<0.50
p-Isopropyltoluene	--	--	NA	NA	NA	<0.20	<0.20	NA	NA	NA	<0.20
sec-Butylbenzene	--	--	NA	NA	NA	<0.25	<0.25	NA	NA	NA	<0.25
Toluene	1,000	200	<1.0	<0.20	<0.11	<0.20	<0.20	<1.0	<0.20	<0.22	<0.20
1,2,4-Trimethylbenzene	--	--	<1.0	<0.20	<0.25	<0.20	<0.20	<1.0	0.21	<0.50	<0.20
1,3,5-Trimethylbenzene	--	--	<1.0	<0.20	<0.19	<0.20	<0.20	<1.0	<0.20	<0.38	<0.20
Trimethylbenzenes (Total)	480	96	<2	<0.4	<0.44	<0.4	<0.4	<2	<0.2	<0.88	<0.4
Xylenes, Total	10,000	1,000	<2.5	<0.50	<0.39	<0.50	<0.50	<2.5	<0.50	<0.78	<0.50
PAH											
Acenaphthene	--	--	NA	NA	NA	<0.64	<0.33	NA	NA	NA	<0.65
Anthracene	3,000	600	NA	NA	NA	<0.038	<0.038	NA	NA	NA	<0.038
Benzo (a) anthracene	--	--	NA	NA	NA	<0.062	<0.044	NA	NA	NA	<0.063
Benzo (a) pyrene	--	--	NA	NA	NA	<0.037	<0.032	NA	NA	NA	<0.037
Benzo (k) fluoranthene	--	--	NA	NA	NA	<0.046	<0.046	NA	NA	NA	<0.047
Chrysene	0.2	0.02	NA	NA	NA	<0.054	<0.041	NA	NA	NA	<0.055
Fluoranthene	400	80	NA	NA	NA	<0.027	<0.081	NA	NA	NA	<0.027
Fluorene	400	80	NA	NA	NA	<0.071	<0.062	NA	NA	NA	<0.072
1-Methylnaphthalene	--	--	NA	NA	NA	<0.49	<0.32	NA	NA	NA	<0.49
2-Methylnaphthalene	--	--	NA	NA	NA	<0.33	<0.31	NA	NA	NA	<0.34
Naphthalene	100	10	NA	NA	NA	<0.29	<0.40	NA	NA	NA	<0.29
Phenanthrene	--	--	NA	NA	NA	<0.022	<0.030	NA	NA	NA	<0.022
Pyrene	250	50	NA	NA	NA	<0.044	<0.044	NA	NA	NA	<0.045

Footnotes on Page 8.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-4 (continued)			MW-5					MW-6
Sample Date	ES	PAL	05/04/06	08/14/06	02/14/07	06/15/04	09/29/04	05/04/06	08/14/06	02/14/07	06/15/04
Metals											
Arsenic	10	1	<0.79	3.47	2.1 J	<25	<0.79	<0.79	<0.42	4.7	<25
Barium	2,000	400	410	390	250	180	380	380	370	350	260
Cadmium	5	0.5	0.17 J	<0.14	<0.14	**10**	<0.14	**150**	<0.14	0.19 J	3.4
Chromium	100	10	NA	1.6	NA	NA	NA	NA	1.6	NA	NA
Lead	15	1.5	<1.4	NA	<1.4	<13	<1.4	<1.4	NA	<1.4	<13

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-6 (continued)				MW-7	DUP-06-15	DUP-06-16	Dup-99	MW-7
Sample Date	ES	PAL	09/29/04	05/02/06	08/14/06	02/14/07	06/15/04	06/15/04	06/16/04	02/15/07	06/16/04
VOC											
Benzene	5	0.5	<0.20	<1.0	<0.20	<0.25	<0.20	<0.20	NA	<0.25	NA
1,2-Dichloroethane	5	0.5	<0.50	NA	NA	NA	<0.50	<0.50	NA	NA	NA
Ethylbenzene	700	140	<0.50	<2.5	<0.50	<0.22	<0.50	<0.50	NA	<0.22	NA
Isopropylbenzene	--	--	<0.20	NA	NA	NA	<0.20	<0.20	NA	NA	NA
Naphthalene	100	10	<0.25	<1.2	<0.25	NA	<0.25	<0.25	NA	NA	NA
n-Propylbenzene	--	--	<0.50	NA	NA	NA	<0.50	<0.50	NA	NA	NA
p-Isopropyltoluene	--	--	<0.20	NA	NA	NA	<0.20	<0.20	NA	NA	NA
sec-Butylbenzene	--	--	<0.25	NA	NA	NA	<0.25	<0.25	NA	NA	NA
Toluene	1,000	200	<0.20	<1.0	<0.20	<0.11	<0.20	<0.20	NA	<0.11	NA
1,2,4-Trimethylbenzene	--	--	<0.20	<1.0	<0.20	<0.25	<0.20	<0.20	NA	<0.25	NA
1,3,5-Trimethylbenzene	--	--	<0.20	<1.0	<0.20	<0.19	<0.20	<0.20	NA	<0.19	NA
Trimethylbenzenes (Total)	480	96	<0.4	<2	<0.4	<0.44	<0.4	<0.4	NA	<0.44	NA
Xylenes, Total	10,000	1,000	<0.50	<2.5	<0.50	<0.39	<0.50	<0.50	NA	<0.39	NA
PAH											
Acenaphthene	--	--	<0.34	NA	NA	NA	<0.66	<0.61	NA	NA	NA
Anthracene	3,000	600	<0.039	NA	NA	NA	<0.039	<0.036	NA	NA	NA
Benzo (a) anthracene	--	--	<0.045	NA	NA	NA	<0.064	<0.059	NA	NA	NA
Benzo (a) pyrene	--	--	<0.033	NA	NA	NA	<0.038	<0.035	NA	NA	NA
Benzo (k) fluoranthene	--	--	<0.047	NA	NA	NA	<0.048	<0.044	NA	NA	NA
Chrysene	0.2	0.02	<0.042	NA	NA	NA	<0.056	<0.052	NA	NA	NA
Fluoranthene	400	80	<0.083	NA	NA	NA	<0.027	<0.025	NA	NA	NA
Fluorene	400	80	<0.063	NA	NA	NA	<0.073	<0.068	NA	NA	NA
1-Methylnaphthalene	--	--	<0.33	NA	NA	NA	<0.50	<0.47	NA	NA	NA
2-Methylnaphthalene	--	--	<0.32	NA	NA	NA	<0.34	<0.32	NA	NA	NA
Naphthalene	100	10	<0.41	NA	NA	NA	<0.30	<0.28	NA	NA	NA
Phenanthrene	--	--	<0.031	NA	NA	NA	<0.023	<0.021	NA	NA	NA
Pyrene	250	50	<0.045	NA	NA	NA	<0.046	<0.042	NA	NA	NA

Footnotes on Page 10.

Because we care
100% recycled paper produced by wind power energy

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-6 (continued)				MW-7	DUP-06-15	DUP-06-16	Dup-99	MW-7
Sample Date	ES	PAL	09/29/04	05/02/06	08/14/06	02/14/07	06/15/04	06/15/04	06/16/04	02/15/07	06/16/04
Metals											
Arsenic	10	1	<0.79	<0.79	<0.42	<1	NA	NA	<25	NA	<25
Barium	2,000	400	280	230	260	240	NA	NA	200	NA	170
Cadmium	5	0.5	<0.14	0.18 J	<0.14	0.19 J	NA	NA	3.5	NA	<1.1
Chromium	100	10	NA	NA	1.2	NA	NA	NA	NA	NA	NA
Lead	15	1.5	<1.4	<1.4	NA	<1.4	NA	NA	<13	NA	<13

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-7	MW-99	MW-7	DUP-99	MW-7 (continued)		MW-9		
Sample Date	ES	PAL	09/28/04	09/28/04	05/03/06	05/03/06	08/14/06	02/15/07	06/15/04	09/27/04	05/03/06
VOC											
Benzene	5	0.5	<0.20	<0.20	<0.20	<0.20	<0.20	<0.25	<0.20	<0.20	<1.0
1,2-Dichloroethane	5	0.5	<0.50	<0.50	NA	NA	NA	NA	<0.50	<0.50	NA
Ethylbenzene	700	140	<0.50	<0.50	<0.50	<0.50	<0.50	<0.22	<0.50	<0.50	<2.5
Isopropylbenzene	--	--	<0.20	<0.20	NA	NA	NA	NA	<0.20	<0.20	NA
Naphthalene	100	10	<0.25	<0.25	<0.25	<0.25	<0.25	NA	<0.25	<0.25	<1.2
n-Propylbenzene	--	--	<0.50	<0.50	NA	NA	NA	NA	<0.50	<0.50	NA
p-Isopropyltoluene	--	--	<0.20	<0.20	NA	NA	NA	NA	<0.20	<0.20	NA
sec-Butylbenzene	--	--	<0.25	<0.25	NA	NA	NA	NA	<0.25	<0.25	NA
Toluene	1,000	200	<0.20	<0.20	<0.20	<0.20	<0.20	<0.11	<0.20	<0.20	<1.0
1,2,4-Trimethylbenzene	--	--	<0.20	<0.20	<0.20	<0.20	<0.20	<0.25	<0.20	<0.20	<1.0
1,3,5-Trimethylbenzene	--	--	<0.20	<0.20	<0.20	<0.20	<0.20	<0.19	<0.20	<0.20	<1.0
Trimethylbenzenes (Total)	480	96	<0.4	<0.4	<0.4	<0.4	<0.4	<0.44	<0.4	<0.4	<2
Xylenes, Total	10,000	1,000	<0.50	<0.50	<0.50	<0.50	<0.50	<0.39	<0.50	<0.50	<2.5
PAH											
Acenaphthene	--	--	<0.33	<0.34	NA	NA	NA	NA	<0.58	<0.82	NA
Anthracene	3,000	600	<0.038	<0.039	NA	NA	NA	NA	<0.034	<0.095	NA
Benzo (a) anthracene	--	--	<0.044	<0.045	NA	NA	NA	NA	<0.056	<0.11	NA
Benzo (a) pyrene	--	--	<0.032	<0.033	NA	NA	NA	NA	<0.033	<0.080	NA
Benzo (k) fluoranthene	--	--	<0.046	<0.047	NA	NA	NA	NA	<0.042	<0.13	NA
Chrysene	0.2	0.02	<0.041	<0.042	NA	NA	NA	NA	<0.049	<0.10	NA
Fluoranthene	400	80	<0.081	<0.083	NA	NA	NA	NA	<0.024	<0.20	NA
Fluorene	400	80	<0.062	<0.063	NA	NA	NA	NA	<0.064	<0.16	NA
1-Methylnaphthalene	--	--	<0.32	<0.33	NA	NA	NA	NA	<0.44	<0.80	NA
2-Methylnaphthalene	--	--	<0.31	<0.32	NA	NA	NA	NA	<0.30	<0.78	NA
Naphthalene	100	10	<0.40	<0.41	NA	NA	NA	NA	<0.26	<1.0	NA
Phenanthrene	--	--	<0.030	<0.031	NA	NA	NA	NA	<0.020	<0.075	NA
Pyrene	250	50	<0.044	<0.045	NA	NA	NA	NA	<0.040	<0.11	NA

Footnotes on Page 12.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-7	MW-99	MW-7	DUP-99	MW-7 (continued)		MW-9		
Sample Date	ES	PAL	09/28/04	09/28/04	05/03/06	05/03/06	08/14/06	02/15/07	06/15/04	09/27/04	05/03/06
Metals											
Arsenic	10	1	<0.79	NA	<0.79	NA	<0.42	1.6 J	<25	2.4	1.8 J
Barium	2,000	400	140	NA	160	NA	140	180	190	160	220
Cadmium	5	0.5	<0.14	NA	<0.14	NA	<0.14	<0.14	2.6	<0.14	<0.14
Chromium	100	10	NA	NA	NA	NA	0.2 J	NA	NA	NA	NA
Lead	15	1.5	<1.4	NA	<1.4	NA	NA	<1.4	<13	<1.4	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-9 (continued)				MW-10				Dup-97
Sample Date	ES	PAL	08/14/06	02/14/07	05/10/07	06/23/09	06/15/04	09/28/04	05/05/06	08/16/06	08/16/06
VOC											
Benzene	5	0.5	<0.20	<0.25	NA	NA	<0.20	<0.20	<1.0	<0.20	<0.20
1,2-Dichloroethane	5	0.5	NA	NA	NA	NA	<0.50	<0.50	NA	NA	NA
Ethylbenzene	700	140	<0.50	<0.22	NA	NA	<0.50	<0.50	<2.5	<0.50	<0.50
Isopropylbenzene	--	--	NA	NA	NA	NA	<0.20	<0.20	NA	NA	NA
Naphthalene	100	10	<0.25	NA	NA	NA	<0.25	<0.25	<1.2	<0.25	<0.25
n-Propylbenzene	--	--	NA	NA	NA	NA	<0.50	<0.50	NA	NA	NA
p-Isopropyltoluene	--	--	NA	NA	NA	NA	<0.20	<0.20	NA	NA	NA
sec-Butylbenzene	--	--	NA	NA	NA	NA	<0.25	<0.25	NA	NA	NA
Toluene	1,000	200	<0.20	<0.11	NA	NA	<0.20	<0.20	<1.0	<0.20	<0.20
1,2,4-Trimethylbenzene	--	--	<0.20	<0.25	NA	NA	<0.20	<0.20	<1.0	<0.20	<0.20
1,3,5-Trimethylbenzene	--	--	<0.20	<0.19	NA	NA	<0.20	<0.20	<1.0	<0.20	<0.20
Trimethylbenzenes (Total)	480	96	<0.4	<0.44	NA	NA	<0.4	<0.4	<2	<0.4	<0.4
Xylenes, Total	10,000	1,000	<0.50	<0.39	NA	NA	<0.50	<0.50	<2.5	<0.50	<0.50
PAH											
Acenaphthene	--	--	NA	NA	<0.33 M8	<0.34	<0.63	<0.34	NA	NA	NA
Anthracene	3,000	600	NA	NA	<0.038 M8	<0.039	<0.037	<0.039	NA	NA	NA
Benzo (a) anthracene	--	--	NA	NA	<0.044	<0.045	<0.061	<0.045	NA	NA	NA
Benzo (a) pyrene	--	--	NA	NA	<0.032	<0.033	<0.036	<0.033	NA	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	<0.044	<0.045	<0.044	<0.045	NA	NA	NA
Chrysene	0.2	0.02	NA	NA	<0.041	<0.042	<0.053	<0.042	NA	NA	NA
Fluoranthene	400	80	NA	NA	<0.082	<0.083	<0.026	<0.083	NA	NA	NA
Fluorene	400	80	NA	NA	<0.063 M8	<0.064	<0.070	<0.064	NA	NA	NA
1-Methylnaphthalene	--	--	NA	NA	<0.32 M8	<0.33	<0.48	<0.33	NA	NA	NA
2-Methylnaphthalene	--	--	NA	NA	<0.31 M8	<0.32	<0.33	<0.32	NA	NA	NA
Naphthalene	100	10	NA	NA	<0.4 M8	<0.41	<0.28	<0.41	NA	NA	NA
Phenanthrene	--	--	NA	NA	<0.03	<0.031	<0.022	<0.031	NA	NA	NA
Pyrene	250	50	NA	NA	<0.044	<0.045	<0.044	<0.045	NA	NA	NA

Footnotes on Page 14.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-9 (continued)				MW-10				Dup-97
Sample Date	ES	PAL	08/14/06	02/14/07	05/10/07	06/23/09	06/15/04	09/28/04	05/05/06	08/16/06	08/16/06
Metals											
Arsenic	10	1	6.18	5.4	<1	<1	<25	<0.79	1.1 J	<0.42	NA
Barium	2,000	400	180	150	180	180	170	66	200	64	NA
Cadmium	5	0.5	<0.14	0.18 J	<0.14	<0.14	1.9	<0.14	<0.14	<0.14	NA
Chromium	100	10	0.74	NA	5.3 J	5.3 J	NA	NA	NA	<0.19	NA
Lead	15	1.5	NA	<1.4	<1.4	<1.4	<13	<1.4	<1.4	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-10	MW-11					MW-12		
Sample Date	ES	PAL	02/13/07	06/15/04	09/28/04	05/03/06	08/15/06	02/14/07	06/15/04	09/28/04	05/03/06
VOC											
Benzene	5	0.5	<0.25	<0.20	<0.20	<1.0	<0.20	<0.25	<0.20	<0.20	<1.0
1,2-Dichloroethane	5	0.5	NA	<0.50	<0.50	NA	NA	NA	<0.50	<0.50	NA
Ethylbenzene	700	140	<0.22	<0.50	<0.50	<2.5	<0.50	<0.22	<0.50	<0.50	<2.5
Isopropylbenzene	--	--	NA	<0.20	<0.20	NA	NA	NA	<0.20	<0.20	NA
Naphthalene	100	10	NA	<0.25	<0.25	<1.2	<0.25	NA	<0.25	<0.25	<1.2
n-Propylbenzene	--	--	NA	<0.50	<0.50	NA	NA	NA	<0.50	<0.50	NA
p-Isopropyltoluene	--	--	NA	<0.20	<0.20	NA	NA	NA	0.89	<0.20	NA
sec-Butylbenzene	--	--	NA	<0.25	<0.25	NA	NA	NA	<0.25	<0.25	NA
Toluene	1,000	200	0.53	<0.20	<0.20	<1.0	<0.20	<0.11	<0.20	<0.20	<1.0
1,2,4-Trimethylbenzene	--	--	0.39 J	<0.20	<0.20	<1.0	<0.20	<0.25	<0.20	<0.20	<1.0
1,3,5-Trimethylbenzene	--	--	<0.19	<0.20	<0.20	<1.0	<0.20	<0.19	<0.20	<0.20	<1.0
Trimethylbenzenes (Total)	480	96	<0.19	<0.4	<0.4	<2	<0.4	<0.44	<0.4	<0.4	<2
Xylenes, Total	10,000	1,000	<0.39	1.4	<0.50	<2.5	<0.50	<0.39	<0.50	<0.50	<2.5
PAH											
Acenaphthene	--	--	NA	<1.4	<0.34	NA	NA	NA	<0.58	<0.34	NA
Anthracene	3,000	600	NA	<0.085	<0.039	NA	NA	NA	<0.034	<0.039	NA
Benzo (a) anthracene	--	--	NA	<0.14	<0.045	NA	NA	NA	<0.056	<0.045	NA
Benzo (a) pyrene	--	--	NA	<0.082	<0.033	NA	NA	NA	<0.033	<0.033	NA
Benzo (k) fluoranthene	--	--	NA	<0.10	<0.045	NA	NA	NA	<0.040	<0.045	NA
Chrysene	0.2	0.02	NA	<0.12	<0.042	NA	NA	NA	<0.049	<0.042	NA
Fluoranthene	400	80	NA	<0.060	<0.083	NA	NA	NA	<0.024	<0.083	NA
Fluorene	400	80	NA	<0.16	<0.064	NA	NA	NA	<0.064	<0.063	NA
1-Methylnaphthalene	--	--	NA	<1.1	<0.33	NA	NA	NA	<0.44	<0.33	NA
2-Methylnaphthalene	--	--	NA	<0.75	<0.32	NA	NA	NA	<0.30	<0.32	NA
Naphthalene	100	10	NA	<0.65	<0.41	NA	NA	NA	<0.26	<0.41	NA
Phenanthrene	--	--	NA	<0.050	<0.031	NA	NA	NA	<0.020	<0.031	NA
Pyrene	250	50	NA	<0.10	<0.045	NA	NA	NA	<0.040	<0.045	NA

Footnotes on Page 16.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-10	MW-11					MW-12		
Sample Date	ES	PAL	02/13/07	06/15/04	09/28/04	05/03/06	08/15/06	02/14/07	06/15/04	09/28/04	05/03/06
Metals											
Arsenic	10	1	<1	<25	<0.79	<0.79	4.33	4.9	<25	5.4	<0.79
Barium	2,000	400	79	510	500	170	220	130	470	380	190
Cadmium	5	0.5	<0.14	3.9	0.16	0.16 J	<0.14	<0.14	3.9	0.27	0.18 J
Chromium	100	10	NA	NA	NA	NA	1.2	NA	NA	NA	NA
Lead	15	1.5	<1.4	<13	<1.4	<1.4	NA	<1.4	<13	<1.4	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-12 (continued)		MW-21	MW-22	MW-23		MW-25	MW-26	
Sample Date	ES	PAL	08/15/06	02/14/07	06/22/09	06/22/09	06/22/09	01/14/10	06/23/09	06/24/09	01/13/10
VOC											
Benzene	5	0.5	<0.20	<0.25	NA	NA	NA	<0.20	NA	<0.20	<0.20
1,2-Dichloroethane	5	0.5	NA	NA	NA	NA	NA	<0.50	NA	<0.50	<0.50
Ethylbenzene	700	140	<0.50	<0.22	NA	NA	NA	<0.50	NA	<0.50	<0.50
Isopropylbenzene	--	--	NA	NA	NA	NA	NA	<0.20	NA	<0.20	<0.20
Naphthalene	100	10	<0.25	NA	NA	NA	NA	<0.25	NA	<0.25	<0.25
n-Propylbenzene	--	--	NA	NA	NA	NA	NA	<0.20	NA	<0.20	<0.20
p-Isopropyltoluene	--	--	NA	NA	NA	NA	NA	1.8	NA	<0.20	<0.20
sec-Butylbenzene	--	--	NA	NA	NA	NA	NA	<0.25	NA	<0.25	<0.25
Toluene	1,000	200	<0.20	<0.11	NA	NA	NA	<0.20	NA	<0.20	<0.20
1,2,4-Trimethylbenzene	--	--	<0.20	<0.25	NA	NA	NA	<0.20	NA	0.30 J	<0.20
1,3,5-Trimethylbenzene	--	--	<0.20	<0.19	NA	NA	NA	<0.20	NA	<0.20	<0.20
Trimethylbenzenes (Total)	480	96	<0.4	<0.44	NA	NA	NA	<0.4	NA	0.3	<0.4
Xylenes, Total	10,000	1,000	<0.50	<0.39	NA	NA	NA	<0.50	NA	<0.50	<0.50
PAH											
Acenaphthene	--	--	NA	NA	<0.88	<0.33	<0.33	<0.33	<0.33	<0.33	<0.33
Anthracene	3,000	600	NA	NA	2.2 J	0.09 J	<0.038	<0.038	<0.038	<0.038	<0.038
Benzo (a) anthracene	--	--	NA	NA	<0.12	<0.044	<0.044	<0.044	<0.044	<0.044	<0.044
Benzo (a) pyrene	--	--	NA	NA	<0.085	<0.032	<0.032	0.049 J	<0.032	<0.032	<0.032
Benzo (k) fluoranthene	--	--	NA	NA	<0.14	<0.046	<0.046	<0.046	<0.046	<0.046	<0.046
Chrysene	0.2	0.02	NA	NA	<0.11	<0.041	<0.041	0.065 J	<0.041	<0.041	<0.041
Fluoranthene	400	80	NA	NA	<0.22	<0.081	<0.081	<0.081	<0.081	<0.081	<0.081
Fluorene	400	80	NA	NA	<0.17	0.1 J	<0.062	<0.062	<0.062	<0.062	<0.062
1-Methylnaphthalene	--	--	NA	NA	<0.85	<0.32	0.41 J	<0.32	<0.32	<0.32	<0.32
2-Methylnaphthalene	--	--	NA	NA	<0.83	0.65 J	0.50 J	<0.31	<0.31	<0.31	<0.31
Naphthalene	100	10	NA	NA	<1.1	<0.40	<0.40	<0.40	<0.40	<0.40	<0.40
Phenanthrene	--	--	NA	NA	<0.080	0.19	<0.03	0.13	<0.03	<0.03	<0.03
Pyrene	250	50	NA	NA	<0.12	<0.044	<0.044	0.38	<0.044	<0.044	<0.044

Footnotes on Page 18.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			MW-12 (continued)		MW-21	MW-22	MW-23		MW-25	MW-26	
Sample Date	ES	PAL	08/15/06	02/14/07	06/22/09	06/22/09	06/22/09	01/14/10	06/23/09	06/24/09	01/13/10
Metals											
Arsenic	10	1	5.32	7.7	NA	NA	NA	NA	NA	NA	NA
Barium	2,000	400	190	290	NA	NA	NA	NA	NA	NA	NA
Cadmium	5	0.5	<0.14	0.2 J	NA	NA	NA	NA	NA	NA	NA
Chromium	100	10	1.6	NA	NA	NA	NA	NA	NA	NA	NA
Lead	15	1.5	NA	<1.4	NA	NA	NA	NA	NA	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-45						GP-47	
Sample Date	ES	PAL	05/04/06	08/16/06	02/12/07	02/13/07	05/09/07	06/23/09	05/04/06	08/15/06
VOC										
Benzene	5	0.5	<1.0	<0.20	<0.25	NA	NA	NA	<1.0	0.21
1,2-Dichloroethane	5	0.5	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	700	140	<2.5	<0.50	<0.22	NA	NA	NA	<2.5	<0.50
Isopropylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	100	10	<1.2	<0.25	NA	NA	NA	NA	<1.2	<0.25
n-Propylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	--	--	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	1,000	200	<1.0	<0.20	0.24 J	NA	NA	NA	<1.0	<0.20
1,2,4-Trimethylbenzene	--	--	<1.0	<0.20	<0.25	NA	NA	NA	<1.0	0.24
1,3,5-Trimethylbenzene	--	--	<1.0	<0.20	<0.19	NA	NA	NA	<1.0	<0.20
Trimethylbenzenes (Total)	480	96	<2	<0.4	<0.44	NA	NA	NA	<2	0.24
Xylenes, Total	10,000	1,000	<2.5	<0.50	<0.39	NA	NA	NA	<2.5	<0.50
PAH										
Acenaphthene	--	--	NA	NA	NA	NA	NA	<0.33	NA	NA
Anthracene	3,000	600	NA	NA	NA	NA	NA	<0.038	NA	NA
Benzo (a) anthracene	--	--	NA	NA	NA	NA	NA	<0.044	NA	NA
Benzo (a) pyrene	--	--	NA	NA	NA	NA	NA	<0.032	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	NA	NA	NA	<0.046	NA	NA
Chrysene	0.2	0.02	NA	NA	NA	NA	NA	<0.041	NA	NA
Fluoranthene	400	80	NA	NA	NA	NA	NA	<0.083	NA	NA
Fluorene	400	80	NA	NA	NA	NA	NA	0.13 J	NA	NA
1-Methylnaphthalene	--	--	NA	NA	NA	NA	NA	<0.32	NA	NA
2-Methylnaphthalene	--	--	NA	NA	NA	NA	NA	<0.31	NA	NA
Naphthalene	100	10	NA	NA	NA	NA	NA	<0.40	NA	NA
Phenanthrene	--	--	NA	NA	NA	NA	NA	0.34	NA	NA
Pyrene	250	50	NA	NA	NA	NA	NA	<0.044	NA	NA

Footnotes on Page 20.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-45						GP-47	
Sample Date	ES	PAL	05/04/06	08/16/06	02/12/07	02/13/07	05/09/07	06/23/09	05/04/06	08/15/06
Metals										
Arsenic	10	1	**19**	**22.9**	NA	**14**	**48**	NA	8.2	**11.4**
Barium	2,000	400	310	270	NA	270	250	NA	310	260
Cadmium	5	0.5	<0.14	<0.14	NA	0.44 J	<0.14	NA	<0.14	<0.14
Chromium	100	10	NA	0.5 J	NA	NA	<2.1	NA	NA	0.63 J
Lead	15	1.5	<1.4	NA	NA	2.7 J	<1.4	NA	<1.4	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-47 (continued)			GP-56	DUP-98	GP-56		GP-62	
Sample Date	ES	PAL	02/13/07	05/09/07	06/23/09	05/05/06	05/05/06	08/16/06	02/13/07	05/05/06	08/15/06
VOC											
Benzene	5	0.5	<0.25	NA	NA	<1.0	<1.0	<0.20	<0.25	<0.20	<0.20
1,2-Dichloroethane	5	0.5	NA	NA	NA	NA	NA	NA	NA	<0.50	NA
Ethylbenzene	700	140	<0.22	NA	NA	<2.5	<2.5	<0.50	<0.22	<0.50	<0.50
Isopropylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	<0.20	NA
Naphthalene	100	10	NA	NA	NA	<1.2	<1.2	<0.25	NA	<0.25	<0.25
n-Propylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	<0.50	NA
p-Isopropyltoluene	--	--	NA	NA	NA	NA	NA	NA	NA	<0.20	NA
sec-Butylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	<0.25	NA
Toluene	1,000	200	0.12 J	NA	NA	<1.0	<1.0	<0.20	0.29 J	<0.20	<0.20
1,2,4-Trimethylbenzene	--	--	<0.25	NA	NA	<1.0	<1.0	1.8	<0.25	<0.20	<0.20
1,3,5-Trimethylbenzene	--	--	<0.19	NA	NA	<1.0	<1.0	0.46	<0.19	<0.20	<0.20
Trimethylbenzenes (Total)	480	96	<0.44	NA	NA	<2	<2	2.26	<0.44	<0.4	<0.4
Xylenes, Total	10,000	1,000	0.43 J	NA	NA	<2.5	<2.5	<0.50	<0.39	<0.50	<0.50
PAH											
Acenaphthene	--	--	NA	NA	0.49 J	NA	NA	NA	NA	NA	NA
Anthracene	3,000	600	NA	NA	5.5	NA	NA	NA	NA	NA	NA
Benzo (a) anthracene	--	--	NA	NA	15	NA	NA	NA	NA	NA	NA
Benzo (a) pyrene	--	--	NA	NA	<0.032	NA	NA	NA	NA	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	<0.046	NA	NA	NA	NA	NA	NA
Chrysene	0.2	0.02	NA	NA	**47 E**	NA	NA	NA	NA	NA	NA
Fluoranthene	400	80	NA	NA	120 E	NA	NA	NA	NA	NA	NA
Fluorene	400	80	NA	NA	7.8	NA	NA	NA	NA	NA	NA
1-Methylnaphthalene	--	--	NA	NA	14	NA	NA	NA	NA	NA	NA
2-Methylnaphthalene	--	--	NA	NA	25	NA	NA	NA	NA	NA	NA
Naphthalene	100	10	NA	NA	<0.40	NA	NA	NA	NA	NA	NA
Phenanthrene	--	--	NA	NA	62 E	NA	NA	NA	NA	NA	NA
Pyrene	250	50	NA	NA	170 E	NA	NA	NA	NA	NA	NA

Footnotes on Page 22.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-47 (continued)			GP-56	DUP-98	GP-56		GP-62	
Sample Date	**ES**	**PAL**	**02/13/07**	**05/09/07**	**06/23/09**	**05/05/06**	**05/05/06**	**08/16/06**	**02/13/07**	**05/05/06**	**08/15/06**
Metals											
Arsenic	10	1	**11**	8.7	NA	6	NA	5.99	**14**	4.7	5.6
Barium	2,000	400	200	280	NA	67	NA	170	170	290	230
Cadmium	5	0.5	<0.14	<0.14	NA	<0.14	NA	<0.14	<0.14	<0.14	**840**
Chromium	100	10	NA	2.4 J	NA	NA	NA	0.46 J	NA	NA	0.9
Lead	15	1.5	<1.4	<1.4	NA	<1.4	NA	NA	<1.4	<1.4	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-62 (continued)	GP-64					GP-65	
Sample Date	ES	PAL	02/13/07	05/05/06	06/13/06	08/15/06	02/13/07	05/10/07	05/05/06	08/16/06
VOC										
Benzene	5	0.5	<0.25	0.3 J	NA	<0.20	<0.25	<0.2	<1.0	<0.20
1,2-Dichloroethane	5	0.5	NA	<0.50	NA	NA	NA	5	NA	NA
Ethylbenzene	700	140	<0.22	<0.50	NA	<0.50	<0.22	<0.5	<2.5	<0.50
Isopropylbenzene	--	--	NA	3.1	NA	NA	NA	<0.2	NA	NA
Naphthalene	100	10	NA	2.5	NA	1.2	NA	<0.25	<1.2	<0.25
n-Propylbenzene	--	--	NA	2.5	NA	NA	NA	<0.5	NA	NA
p-Isopropyltoluene	--	--	NA	0.47 J	NA	NA	NA	<0.2	NA	NA
sec-Butylbenzene	--	--	NA	0.33 J	NA	NA	NA	<0.25	NA	NA
Toluene	1,000	200	0.23 J	0.27 J	NA	<0.20	<0.11	<0.2	<1.0	<0.20
1,2,4-Trimethylbenzene	--	--	<0.25	9.8	NA	3.8	0.96	<0.2	<1.0	0.27
1,3,5-Trimethylbenzene	--	--	<0.19	3.4	NA	2.2	1.5	<0.2	<1.0	<0.20
Trimethylbenzenes (Total)	480	96	<0.44	13.2	NA	6	2.46	<0.4	<2	<0.6
Xylenes, Total	10,000	1,000	<0.39	21	NA	1.6	1.2 J	1.1 J	<2.5	<0.50
PAH										
Acenaphthene	--	--	NA	NA	<0.37	NA	NA	<0.35 M8	NA	NA
Anthracene	3,000	600	NA	NA	<0.043	NA	NA	0.20 M8	NA	NA
Benzo (a) anthracene	--	--	NA	NA	<0.049	NA	NA	<0.046	NA	NA
Benzo (a) pyrene	--	--	NA	NA	<0.036	NA	NA	<0.034	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	<0.051	NA	NA	<0.046	NA	NA
Chrysene	0.2	0.02	NA	NA	<0.046	NA	NA	<0.043	NA	NA
Fluoranthene	400	80	NA	NA	<0.091	NA	NA	<0.085	NA	NA
Fluorene	400	80	NA	NA	<0.070	NA	NA	0.58 M8	NA	NA
1-Methylnaphthalene	--	--	NA	NA	<0.36	NA	NA	0.82 M8, J	NA	NA
2-Methylnaphthalene	--	--	NA	NA	<0.35	NA	NA	1.2 M8	NA	NA
Naphthalene	100	10	NA	NA	<0.45	NA	NA	<0.42 M8	NA	NA
Phenanthrene	--	--	NA	NA	<0.034	NA	NA	1.6	NA	NA
Pyrene	250	50	NA	NA	<0.049	NA	NA	<0.046	NA	NA

Footnotes on Page 24.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-62 (continued)	GP-64					GP-65	
Sample Date	ES	PAL	02/13/07	05/05/06	06/13/06	08/15/06	02/13/07	05/10/07	05/05/06	08/16/06
Metals										
Arsenic	10	1	6.8	2.9	NA	4.64	4.1	<1	NA	NA
Barium	2,000	400	220	210	NA	460	290	250	NA	NA
Cadmium	5	0.5	<0.14	<0.14	NA	2.4	0.19 J	0.24 J	NA	NA
Chromium	100	10	NA	NA	NA	0.35 J	NA	4.3 J	NA	NA
Lead	15	1.5	<1.4	<1.4	NA	NA	<1.4	<1.4	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-65 (continued)		GP-75				GP-76		
Sample Date	ES	PAL	02/14/07	06/23/09	05/05/06	08/15/06	02/13/07	05/10/07	05/02/06	06/13/06	08/15/06
VOC											
Benzene	5	0.5	<0.25	<0.20	<1.0	<0.20	<0.25	NA	<1.0	NA	<0.20
1,2-Dichloroethane	5	0.5	NA	<0.50	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	700	140	<0.22	<0.50	<2.5	<0.50	<0.22	NA	<2.5	NA	<0.50
Isopropylbenzene	--	--	NA	<0.20	NA	NA	NA	NA	NA	NA	NA
Naphthalene	100	10	NA	<0.25	<1.2	<0.25	NA	NA	<1.2	NA	<0.25
n-Propylbenzene	--	--	NA	<0.20	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	--	--	NA	<0.20	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	--	--	NA	<0.25	NA	NA	NA	NA	NA	NA	NA
Toluene	1,000	200	0.22 J	<0.20	<1.0	<0.20	<0.11	NA	<1.0	NA	<0.20
1,2,4-Trimethylbenzene	--	--	<0.25	<0.20	<1.0	<0.20	<0.25	NA	<1.0	NA	<0.20
1,3,5-Trimethylbenzene	--	--	<0.19	<0.20	<1.0	<0.20	<0.19	NA	<1.0	NA	<0.20
Trimethylbenzenes (Total)	480	96	<0.44	<0.40	<2	<0.4	<0.44	NA	<2	NA	<0.4
Xylenes, Total	10,000	1,000	<0.39	<0.50	<2.5	<0.50	<0.39	NA	<2.5	NA	<0.50
PAH											
Acenaphthene	--	--	NA	<0.40	NA	NA	NA	<0.37	NA	0.96 J	NA
Anthracene	3,000	600	NA	<0.046	NA	NA	NA	<0.042	NA	0.66	NA
Benzo (a) anthracene	--	--	NA	<0.053	NA	NA	NA	<0.049	NA	<0.049	NA
Benzo (a) pyrene	--	--	NA	<0.039	NA	NA	NA	<0.036	NA	<0.036	NA
Benzo (k) fluoranthene	--	--	NA	<0.053	NA	NA	NA	<0.049	NA	<0.049	NA
Chrysene	0.2	0.02	NA	<0.049	NA	NA	NA	<0.046	NA	<0.046	NA
Fluoranthene	400	80	NA	<0.089	NA	NA	NA	<0.09	NA	<0.091	NA
Fluorene	400	80	NA	<0.075	NA	NA	NA	<0.069	NA	2.4	NA
1-Methylnaphthalene	--	--	NA	<0.39	NA	NA	NA	<0.36	NA	12	NA
2-Methylnaphthalene	--	--	NA	<0.37	NA	NA	NA	<0.34	NA	21	NA
Naphthalene	100	10	NA	<0.48	NA	NA	NA	<0.44	NA	4.8	NA
Phenanthrene	--	--	NA	<0.036	NA	NA	NA	<0.033	NA	7.4	NA
Pyrene	250	50	NA	<0.053	NA	NA	NA	<0.049	NA	<0.049	NA

Footnotes on Page 26.

Because we care
100% recycled paper produced by wind power energy

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-65 (continued)		GP-75				GP-76		
Sample Date	ES	PAL	02/14/07	06/23/09	05/05/06	08/15/06	02/13/07	05/10/07	05/02/06	06/13/06	08/15/06
Metals											
Arsenic	10	1	NA	NA	**11**	**14.7**	**16**	NA	<0.79	NA	1.16
Barium	2,000	400	NA	NA	200	260	230	NA	450	NA	460
Cadmium	5	0.5	NA	NA	<0.14	<0.14	<0.14	NA	0.22 J	NA	0.3 J
Chromium	100	10	NA	NA	NA	1	NA	NA	NA	NA	1
Lead	15	1.5	NA	NA	<1.4	NA	<1.4	NA	<1.4	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-76 (continued)		GP-80		GP-81	GP-83	GP-88	GP-99	GP-101
Sample Date	ES	PAL	02/15/07	05/09/07	05/09/07	06/23/09	05/09/07	05/09/07	05/10/07	05/10/07	05/09/07
VOC											
Benzene	5	0.5	<0.25	NA	NA	NA	NA	NA	NA	NA	NA
1,2-Dichloroethane	5	0.5	NA	NA	NA	NA	NA	NA	NA	NA	NA
Ethylbenzene	700	140	<0.22	NA	NA	NA	NA	NA	NA	NA	NA
Isopropylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA	NA
Naphthalene	100	10	NA	NA	NA	NA	NA	NA	NA	NA	NA
n-Propylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA	NA
p-Isopropyltoluene	--	--	NA	NA	NA	NA	NA	NA	NA	NA	NA
sec-Butylbenzene	--	--	NA	NA	NA	NA	NA	NA	NA	NA	NA
Toluene	1,000	200	<0.11	NA	NA	NA	NA	NA	NA	NA	NA
1,2,4-Trimethylbenzene	--	--	<0.25	NA	NA	NA	NA	NA	NA	NA	NA
1,3,5-Trimethylbenzene	--	--	<0.19	NA	NA	NA	NA	NA	NA	NA	NA
Trimethylbenzenes (Total)	480	96	<0.44	NA	NA	NA	NA	NA	NA	NA	NA
Xylenes, Total	10,000	1,000	<0.39	NA	NA	NA	NA	NA	NA	NA	NA
PAH											
Acenaphthene	--	--	NA	<0.34 M8	NA	<0.40	NA	<0.33 M8	<0.34 M8	<0.35	<0.35 M8
Anthracene	3,000	600	NA	<0.039 M8	NA	<0.046	NA	0.38 M8	<0.039 M8	<0.041	0.26 M8
Benzo (a) anthracene	--	--	NA	<0.045	NA	<0.053	NA	<0.044	<0.045	<0.047	0.059 J
Benzo (a) pyrene	--	--	NA	<0.033	NA	<0.039	NA	<0.032	<0.033	<0.034	0.058 J
Benzo (k) fluoranthene	--	--	NA	<0.045	NA	46	NA	<0.046	<0.045	<0.047	<0.048
Chrysene	0.2	0.02	NA	<0.042	NA	<0.049	NA	0.34	<0.042	<0.044	0.069 J
Fluoranthene	400	80	NA	<0.084	NA	<0.089	NA	2.4	0.15 J	<0.087	0.56
Fluorene	400	80	NA	<0.064 M8	NA	<0.075	NA	<0.063 M8	<0.063 M8	<0.067	0.36 M8
1-Methylnaphthalene	--	--	NA	<0.33 M8	NA	<0.39	NA	<0.32 M8	<0.33 M8	<0.34	0.52 M8, J
2-Methylnaphthalene	--	--	NA	<0.32 M8	NA	<0.37	NA	<0.31 M8	<0.32 M8	<0.33	1.0 M8, J
Naphthalene	100	10	NA	<0.41 M8	NA	<0.48	NA	<0.4 M8	<0.41 M8	<0.43	0.68 M8, J
Phenanthrene	--	--	NA	<0.031	NA	<0.036	NA	1.2	0.081 J	<0.032	1.2
Pyrene	250	50	NA	<0.045	NA	<0.053	NA	0.14 J	<0.045	<0.047	0.27

Footnotes on Page 28.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			GP-76 (continued)		GP-80		GP-81	GP-83	GP-88	GP-99	GP-101
Sample Date	ES	PAL	02/15/07	05/09/07	05/09/07	06/23/09	05/09/07	05/09/07	05/10/07	05/10/07	05/09/07
Metals											
Arsenic	10	1	1 J	<1	<1	NA	**11**	**16**	<1	NA	<1
Barium	2,000	400	270	260	210	NA	240	210	160	NA	38
Cadmium	5	0.5	0.89	0.2 J	<0.14	NA	<0.14	<0.14	<0.14	NA	0.44 J
Chromium	100	10	NA	3.5 J	2.9 J	NA	3.2 J	5.8 J	<2.1	NA	<2.1
Lead	15	1.5	<1.4	<1.4	<1.4	NA	<1.4	<1.4	<1.4	NA	<1.4

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			RW-2	RW-3		RW-4		RW-5	Trip Blank	
Sample Date	ES	PAL	05/09/07	05/09/07	01/13/10	05/09/07	07/02/09	05/09/07	06/15/04	09/27/04
VOC										
Benzene	5	0.5	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
1,2-Dichloroethane	5	0.5	NA	NA	<0.50	NA	NA	NA	<0.50	<0.50
Ethylbenzene	700	140	NA	NA	<0.50	NA	NA	NA	<0.50	<0.50
Isopropylbenzene	--	--	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
Naphthalene	100	10	NA	NA	<0.25	NA	NA	NA	<0.25	<0.25
n-Propylbenzene	--	--	NA	NA	<0.20	NA	NA	NA	<0.50	<0.50
p-Isopropyltoluene	--	--	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
sec-Butylbenzene	--	--	NA	NA	<0.25	NA	NA	NA	<0.25	<0.25
Toluene	1,000	200	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
1,2,4-Trimethylbenzene	--	--	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
1,3,5-Trimethylbenzene	--	--	NA	NA	<0.20	NA	NA	NA	<0.20	<0.20
Trimethylbenzenes (Total)	480	96	NA	NA	<0.4	NA	NA	NA	<0.4	<0.4
Xylenes, Total	10,000	1,000	NA	NA	<0.50	NA	NA	NA	<0.50	<0.50
PAH										
Acenaphthene	--	--	<0.41 M8	<0.33 M8	<0.33	<0.35 M8	<0.33	<0.33 M8	NA	NA
Anthracene	3,000	600	<0.047 M8	<0.038 M8	0.13	<0.04 M8	<0.038	<0.038 M8	NA	NA
Benzo (a) anthracene	--	--	<0.054	<0.044	0.083 J	<0.046	<0.044	<0.044	NA	NA
Benzo (a) pyrene	--	--	<0.04	<0.032	<0.032	<0.034	<0.032	<0.032	NA	NA
Benzo (k) fluoranthene	--	--	<0.054	<0.044	<0.046	<0.046	<0.044	<0.044	NA	NA
Chrysene	0.2	0.02	<0.051	<0.041	0.10 J	<0.043	<0.041	<0.041	NA	NA
Fluoranthene	400	80	<0.1	<0.081	0.28	<0.085	<0.081	<0.082	NA	NA
Fluorene	400	80	0.29 M8	<0.062 M8	<0.062	<0.065 M8	<0.062	<0.063 M8	NA	NA
1-Methylnaphthalene	--	--	0.67 M8, J	<0.32 M8	<0.32	<0.34 M8	<0.32	<0.32 M8	NA	NA
2-Methylnaphthalene	--	--	<0.38 M8	<0.31 M8	<0.31	<0.33 M8	<0.31	<0.31 M8	NA	NA
Naphthalene	100	10	<0.49 M8	<0.4 M8	<0.40	<0.42 M8	<0.40	<0.4 M8	NA	NA
Phenanthrene	--	--	0.14	0.055 J	0.58	<0.032	0.12 J	<0.03	NA	NA
Pyrene	250	50	<0.054	<0.044	0.67	<0.046	<0.044	<0.044	NA	NA

Footnotes on Page 30.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			RW-2	RW-3		RW-4		RW-5	Trip Blank	
Sample Date	ES	PAL	05/09/07	05/09/07	01/13/10	05/09/07	07/02/09	05/09/07	06/15/04	09/27/04
Metals										
Arsenic	10	1	1.8 J	<1	NA	<1	NA	<1	NA	NA
Barium	2,000	400	270	190	NA	270	NA	190	NA	NA
Cadmium	5	0.5	<0.14	<0.14	NA	<0.14	NA	<0.14	NA	NA
Chromium	100	10	2.3 J	<2.1	NA	2.6 J	NA	7.4	NA	NA
Lead	15	1.5	<1.4	<1.4	NA	<1.4	NA	<1.4	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			Trip Blank (continued)			
Sample Date	ES	PAL	05/05/06	08/14/06	02/12/07	05/10/07
VOC						
Benzene	5	0.5	<0.20	<0.20	<0.25	<0.2
1,2-Dichloroethane	5	0.5	NA	NA	NA	<0.5
Ethylbenzene	700	140	<0.50	<0.50	<0.22	<0.5
Isopropylbenzene	--	--	NA	NA	NA	<0.2
Naphthalene	100	10	<0.25	<0.25	NA	<0.25
n-Propylbenzene	--	--	NA	NA	NA	<0.5
p-Isopropyltoluene	--	--	NA	NA	NA	<0.2
sec-Butylbenzene	--	--	NA	NA	NA	<0.25
Toluene	1,000	200	<0.20	<0.20	<0.11	<0.2
1,2,4-Trimethylbenzene	--	--	<0.20	<0.20	<0.25	<0.2
1,3,5-Trimethylbenzene	--	--	<0.20	<0.20	<0.19	<0.2
Trimethylbenzenes (Total)	480	96	<0.4	<0.4	<0.44	<0.4
Xylenes, Total	10,000	1,000	<0.50	<0.50	<0.39	<0.5
PAH						
Acenaphthene	--	--	NA	NA	NA	NA
Anthracene	3,000	600	NA	NA	NA	NA
Benzo (a) anthracene	--	--	NA	NA	NA	NA
Benzo (a) pyrene	--	--	NA	NA	NA	NA
Benzo (k) fluoranthene	--	--	NA	NA	NA	NA
Chrysene	0.2	0.02	NA	NA	NA	NA
Fluoranthene	400	80	NA	NA	NA	NA
Fluorene	400	80	NA	NA	NA	NA
1-Methylnaphthalene	--	--	NA	NA	NA	NA
2-Methylnaphthalene	--	--	NA	NA	NA	NA
Naphthalene	100	10	NA	NA	NA	NA
Phenanthrene	--	--	NA	NA	NA	NA
Pyrene	250	50	NA	NA	NA	NA

Footnotes on Page 32.

Table 7. Summary of Site-Wide Groundwater Analytical Results and Comparison to WDNR Criteria, Former Meritor Facility, Oshkosh, Wisconsin.

Name			Trip Blank (continued)			
Sample Date	ES	PAL	05/05/06	08/14/06	02/12/07	05/10/07
Metals						
Arsenic	10	1	NA	NA	NA	NA
Barium	2,000	400	NA	NA	NA	NA
Cadmium	5	0.5	NA	NA	NA	NA
Chromium	100	10	NA	NA	NA	NA
Lead	15	1.5	NA	NA	NA	NA

Note: Only compounds detected in one or more samples are in table. For a complete list, refer to the laboratory report.

Note: All concentrations are reported in micrograms per liter (µg/L).

BOLD	Value exceeds the ES.
	Value exceeds the PAL.
ES	NR 140 Enforcement standard.
J	Sample concentration is less than the practical quanitation limit.
M8	MS and/or MSD were below the acceptance limits.
NA	Not analyzed.
PAL	NR 140 Preventive action limit.
PAHs	Polynuclear-aromatic hyrdrocarbons.
Q	Concentration between limit of detection and limit of quantitation.
VOCs	Volatile organic compounds.
WDNR	Wisconsin Department of Natural Resources.

Table 10. Summary of Static Groundwater Elevation Data and LNAPL Thickness, Former Meritor Facility, Oshkosh, Wisconsin.

Well	Ground Surface Elevation (ft msl)	Top-of-Casing Elevation (ft msl)	Screened Interval (ft msl)	Measurement Date	Depth to LNAPL (feet)	Depth to Water (feet)	LNAPL Thickness (feet)	Water Level Elevation (ft msl)
EW-1	754.00	753.32	749.70-739.70	5/21/04	5.34	5.64	0.3	747.41*
				6/14/04	4.8	5.21	0.41	747.75*
				9/27/04	5.34	7.11	1.77	744.67*
				3/4/05	6.23	6.27	0.04	747.01*
				5/2/06	6.03	6.15	0.12	747.06*
				2/12/07	6.53	7.89	1.36	744.25*
				5/7/07	5.83	5.91	0.08	747.34*
				6/6/07	5.92	5.92	NP	NM
				2/21/08	6.55	7.4	0.85	NM
				3/20/08	6.35	6.7	0.35	NM
				5/1/08	5.65	5.71	0.06	NM
				7/16/08	5.62	5.92	0.3	NM
				10/15/08	5.96	6.64	0.68	NM
				12/1/08	6.25	7.18	0.93	NM
				2/10/09	6.24	8.28	2.04	NM
				4/1/09	5.82	6.14	0.32	NM
				6/19/09	5.91	6.15	0.24	NM
				1/13/10	6.32	7.23	0.91	NM
				5/28/10	5.57	7.02	1.45	NM
MW-1	753.95	753.48	749.95-739.95	5/21/04	NP	5.79	NP	747.69
				6/14/04	NP	5.11	NP	748.37
				9/27/04	5.90	6.23	0.33	746.96*
				3/4/05	6.39	6.71	0.32	746.49*
				5/2/06	5.96	6.59	0.63	746.34*
				8/14/06	5.87	6.44	0.57	NM
				2/12/07	NM	6.62	NM	746.86
				5/7/07	5.70	6.40	0.70	746.47*
				11/16/09	6.30	6.44	0.14	NM
				1/13/10	6.36	6.88	0.52	NM
				6/6/07	5.72	6.25	0.53	NM
				2/21/08	6.4	7.5	1.10	NM
				3/20/08	6.85	7.11	0.26	NM
				5/1/08	5.5	5.85	0.35	NM
				7/16/08	5.52	5.68	0.16	NM
				10/15/08	5.92	6.36	0.44	NM
				12/1/08	6.22	6.59	0.37	NM
				2/10/09	6.3	6.94	0.64	NM
				4/1/09	5.65	6.31	0.66	NM
				6/19/09	5.72	6.37	0.65	NM
				11/16/09	6.3	6.44	0.14	NM
				1/13/10	6.36	6.88	0.52	NM
				5/28/10	5.62	6.27	0.65	NM
MW-2	754.00	753.72	750-740	5/21/04	NP	5.81	NP	747.91
				6/14/04	NP	5.13	NP	748.59
				9/27/04	NP	5.96	NP	747.76
				3/4/05	NP	6.19	NP	747.53

Footnotes on Page 5.

Table 10. Summary of Static Groundwater Elevation Data and LNAPL Thickness, Former Meritor Facility, Oshkosh, Wisconsin.

Well	Ground Surface Elevation (ft msl)	Top-of-Casing Elevation (ft msl)	Screened Interval (ft msl)	Measurement Date	Depth to LNAPL (feet)	Depth to Water (feet)	LNAPL Thickness (feet)	Water Level Elevation (ft msl)
MW-2 (continued)				5/2/06	NP	5.95	NP	747.77
				8/14/06	NP	5.88	NP	747.84
				2/12/07	6.65	6.68	0.03	747.01*
				5/7/07	NP	5.69	NP	748.03
				6/22/09	5.68	5.79	0.11	747.93
				5/28/10	5.60	5.60	NP	NM
MW-3	753.99	753.48	749.99-739.99	5/21/04	NP	5.23	NP	748.25
				6/14/04	NP	4.68	NP	748.80
				9/27/04	NP	5.77	NP	747.71
				3/4/05	NP	5.81	NP	747.67
				5/2/06	NP	5.46	NP	748.02
				8/14/06	NP	5.58	NP	747.90
				2/12/07	NP	6.52	NP	746.96
				5/7/07	NP	5.14	NP	748.34
				6/22/09	NP	5.01	NP	748.47
MW-4	750.13	749.87	746.13-736.13	5/21/04	NP	3.68	NP	746.19
				6/14/04	NP	3.18	NP	746.69
				9/27/04	NP	4.08	NP	745.79
				3/4/05	NP	4.24	NP	745.63
				5/2/06	NP	3.80	NP	746.07
				8/14/06	NP	4.01	NP	745.86
				2/12/07	NP	4.71	NP	745.16
				5/7/07	NP	3.14	NP	746.73
MW-5	751.71	751.11	747.71-737.71	5/21/04	NP	3.12	NP	747.99
				6/14/04	NP	2.39	NP	748.72
				9/27/04	NP	3.34	NP	747.77
				3/4/05	NP	3.85	NP	747.26
				5/2/06	NP	3.50	NP	747.61
				8/14/06	NP	3.37	NP	747.74
				2/12/07	NP	4.43	NP	746.68
				5/7/07	NP	3.19	NP	747.92
MW-6	750.36	750.01	746.36-736.36	5/21/04	NP	3.85	NP	746.16
				6/14/04	NP	3.28	NP	746.73
				9/27/04	NP	4.26	NP	745.75
				3/4/05	NP	4.34	NP	745.67
				5/2/06	NP	3.99	NP	746.02
				8/14/06	NP	4.25	NP	745.76
				2/12/07	NP	4.84	NP	745.17
				5/7/07	NP	3.79	NP	746.22
MW-7	757.61	757.21	753.61-743.61	5/21/04	NP	5.34	NP	751.87
				6/14/04	NP	4.36	NP	752.85
				9/27/04	NM	NM	NM	NM
				3/4/05	NP	6.65	NP	750.56
				5/2/06	NP	6.60	NP	750.61
				8/14/06	NP	6.98	NP	750.23

Footnotes on Page 5.

Table 10. Summary of Static Groundwater Elevation Data and LNAPL Thickness, Former Meritor Facility, Oshkosh, Wisconsin.

Well	Ground Surface Elevation (ft msl)	Top-of-Casing Elevation (ft msl)	Screened Interval (ft msl)	Measurement Date	Depth to LNAPL (feet)	Depth to Water (feet)	LNAPL Thickness (feet)	Water Level Elevation (ft msl)
MW-7				2/12/07	NP	7.24	NP	749.97
(continued)				5/7/07	NP	5.85	NP	751.36
MW-8	750.20	749.98	746.20-736.20	5/21/04	NP	1.84	NP	748.14
				6/14/04	NP	1.07	NP	748.91
				9/27/04	NP	3.02	NP	746.96
				3/4/05	NP	3.33	NP	746.65
				5/2/06	NP	2.47	NP	747.51
				8/14/06	NP	2.36	NP	747.62
				2/12/07	NP	3.37	NP	746.61
				5/7/07	NP	2.30	NP	747.68
				7/9/08	NP	2.01	NP	747.97
				6/22/09	NP	2.11	NP	747.87
				11/19/09	NP	2.82	NP	747.16
MW-9	752.44	752.10	748.44-738.44	5/21/04	NP	3.01	NP	749.09
				6/14/04	NP	2.45	NP	749.65
				9/27/04	NP	4.18	NP	747.92
				3/4/05	NP	3.71	NP	748.39
				5/2/06	NP	3.26	NP	748.84
				5/8/06	NP	3.81	NP	748.29
				2/12/07	NP	4.95	NP	747.15
				5/7/07	NP	2.85	NP	749.25
				6/22/09	NP	3.28	NP	748.82
MW-10	753.98	753.70	749.98-739.98	5/21/04	NP	3.7	NP	750.00
				6/14/04	NP	3.42	NP	750.28
				9/27/04	NP	4.61	NP	749.09
				3/4/05	NP	4.09	NP	749.61
				5/2/06	NP	4.11	NP	749.59
				8/14/06	NP	3.82	NP	749.88
				2/12/07	NP	5.03	NP	748.67
				5/7/07	NP	4.28	NP	749.42
MW-11	752.20	751.86	748.20-738.20	5/21/04	NP	2.42	NP	749.44
				6/14/04	NP	2.11	NP	749.75
				9/27/04	NP	3.04	NP	748.82
				3/4/05	NP	3.34	NP	748.52
				5/2/06	NP	3.27	NP	748.59
				8/14/06	NP	3.57	NP	748.29
				2/12/07	NP	4.66	NP	747.20
				5/7/07	NP	2.86	NP	749.00
MW-12	750.38	750.14	746.38-736.38	5/21/04	NP	1.08	NP	749.06
				6/14/04	NP	0.63	NP	749.51
				9/27/04	NP	2.00	NP	748.14
				3/4/05	NP	2.71	NP	747.43
				5/2/06	NP	1.97	NP	748.17
				8/14/06	NP	2.13	NP	748.01
				2/12/07	NP	3.36	NP	746.78
				5/7/07	NP	1.97	NP	748.17

Footnotes on Page 5.

Table 10. Summary of Static Groundwater Elevation Data and LNAPL Thickness, Former Meritor Facility, Oshkosh, Wisconsin.

Well	Ground Surface Elevation (ft msl)	Top-of-Casing Elevation (ft msl)	Screened Interval (ft msl)	Measurement Date	Depth to LNAPL (feet)	Depth to Water (feet)	LNAPL Thickness (feet)	Water Level Elevation (ft msl)
MW-13	751.64	751.29		5/7/07	NP	2.82	NP	748.47
	751.64	751.29		7/9/08	NP	2.79	NP	748.50
	751.64	751.29		6/22/09	NP	2.67	NP	748.62
	751.64	751.29		11/19/09	NP	3.60	NP	747.69
MW-14	750.97	750.61		5/7/07	NP	1.99	NP	748.62
	750.97	750.61		7/9/08	NP	1.64	NP	748.97
MW-15	750.92	750.50		5/7/07	NP	2.30	NP	748.20
	750.92	750.50		7/9/08	NP	2.21	NP	748.29
	750.92	750.50		6/22/09	NP	2.33	NP	748.17
	750.92	750.50		11/19/09	NP	2.86	NP	747.64
MW-16	750.95	750.44		5/7/07	NP	1.95	NP	748.49
	750.95	750.44		7/9/08	NP	1.45	NP	748.99
	750.95	750.44		6/22/09	NP	2.19	NP	748.25
	750.95	750.44		11/19/09	NP	2.83	NP	747.61
MW-17	750.43	749.97		5/7/07	NP	2.15	NP	747.82
	750.43	749.97		7/9/08	NP	1.86	NP	748.11
MW-18	NM	NM		6/22/09	NP	5.18	NP	NM
				11/19/09	NP	5.94	NP	NM
MW-19	NM	NM		6/22/09	NP	4.71	NP	NM
				11/19/09	NP	5.48	NP	NM
MW-20	NM	NM		6/22/09	NP	2.05	NP	NM
				11/19/19	NP	2.83	NP	NM
MW-21	NM	NM		6/22/09	NP	5.25	NP	NM
MW-22	NM	NM		6/22/09	NP	5.78	NP	NM
MW-23	NM	NM		6/22/09	NP	5.48	NP	NM
				11/16/09	5.83	7.75	1.92	NM
				5/28/10	5.42	5.77	0.35	NM
MW-24	NM	NM		11/16/09	5.78	7.69	1.91	NM
				1/13/10	5.66	9.74	4.08	NM
				5/28/10	6.66	10.74	4.08	NM
MW-25	NM	NM		6/23/09	NP	5.62	NP	NM
				11/16/09	NP	6.30	NP	NM
				1/13/10	NP	6.69	NP	NM
MW-26	NM	NM		6/22/09	NP	5.18	NP	NM
				11/16/09	NP	5.68	NP	NM
				1/13/10	NP	5.66	NP	NM
MW-27	NM	NM		11/16/09	NP	5.66	NP	NM
				1/13/10	NP	5.68	NP	NM
MW-28	NM	NM		11/16/09	NP	5.70	NP	NM
				1/13/10	NP	5.68	NP	NM
RW-2	NM	NM		6/6/07	5.92	5.92	NP	NM
				2/21/08	6.55	7.4	0.85	NM
				3/20/08	6.35	6.7	0.35	NM
				5/1/08	5.65	5.71	0.06	NM
				7/16/08	5.62	5.92	0.3	NM
				10/15/08	5.96	6.64	0.68	NM

Footnotes on Page 5.

Table 10. Summary of Static Groundwater Elevation Data and LNAPL Thickness, Former Meritor Facility, Oshkosh, Wisconsin.

Well	Ground Surface Elevation (ft msl)	Top-of-Casing Elevation (ft msl)	Screened Interval (ft msl)	Measurement Date	Depth to LNAPL (feet)	Depth to Water (feet)	LNAPL Thickness (feet)	Water Level Elevation (ft msl)
RW-2 (continued)				12/1/08	6.25	7.18	0.93	NM
				2/10/09	6.24	8.28	2.04	NM
				4/1/09	5.82	6.14	0.32	NM
				6/19/09	5.84	6.36	0.52	NM
				11/16/09	6.04	6.53	0.49	NM
				1/13/10	6.24	7.11	0.87	NM
				5/28/10	5.18	6.01	0.83	NM
RW-3	NM	NM		6/6/07	5.49	5.49	NP	NM
				2/21/08	6.55	7.04	0.49	NM
				3/20/08	5.9	6.35	0.45	NM
				5/1/08	5.15	5.47	0.32	NM
				7/16/08	5.28	5.53	0.25	NM
				10/15/08	5.71	6.08	0.37	NM
				12/1/08	6.15	6.79	0.64	NM
				2/10/09	6.1	6.91	0.81	NM
				4/1/09	5.16	5.63	0.47	NM
				6/19/09	5.72	6.08	0.36	NM
				1/13/10	6.50	6.99	0.49	NM
RW-4	NM	NM		6/6/07	NP	5.24	NP	NM
				2/21/08	NP	8.24	NP	NM
				3/20/08	NP	5.75	NP	NM
				5/1/08	NP	4.93	NP	NM
				7/16/08	NP	5.02	NP	NM
				10/15/08	NP	5.47	NP	NM
				12/1/08	NP	6.0	NP	NM
				2/10/09	NP	5.95	NP	NM
				4/1/09	NP	4.95	NP	NM
				6/19/09	NP	5.50	NP	NM
RW-5	NM	NM		6/6/07	5.5	5.5	NP	NM
				2/21/08	6.33	7.32	0.99	NM
				3/20/08	5.92	6.35	0.43	NM
				5/1/08	5.17	5.5	0.33	NM
				7/16/08	5.28	5.49	0.21	NM
				10/15/08	5.74	5.93	0.19	NM
				12/1/08	6.25	6.63	0.38	NM
				2/10/09	6.23	7.25	1.02	NM
				4/1/09	5.13	5.56	0.43	NM
				6/19/09	5.75	6.35	0.6	NM
				11/16/09	5.98	6.29	0.31	NM
				1/13/10	6.33	7.07	0.74	NM
				5/28/10	5.38	5.65	0.27	NM

* Final groundwater elevation has taken into account LNAPL thickness with specific gravity of 0.87.

ft msl Feet above mean sea level.

LNAPL Light non-aqueous phase liquid.

NM Not measured.

NP No product.

SOURCE PROPERTY

ARCADIS
Infrastructure, environment, facilities

ARCADIS
126 North Jefferson Street
Suite 400
Milwaukee
Wisconsin 53202
Tel 414.276.7742
Fax 414.276.7603
www.arcadis-us.com

General Dynamics Armament and Technical Products, Inc.
Attn: Gary Kjelleren
128 Lakeside Avenue
Burlington, Vermont 05401

ENVIRONMENT

Subject:
Notice of Request for Project Closure, Former Meritor Facility, Oshkosh, Wisconsin.

Dear Mr. Kjelleren:

ARCADIS was retained by Meritor Heavy Vehicle Systems, LLC (ArvinMeritor) to conduct soil and groundwater investigation activities at the subject property identified with Parcel Identification Number 05-761-0000 (see attached warranty deed). Based on the results of the investigation activities, ARCADIS has prepared a request for project closure. The closure request includes a summary report and completed Wisconsin Department of Natural Resources (WDNR) Forms 4400-202, 4400-245 and 4400-246. A copy of the closure documents is enclosed.

This notice is being provided in accordance with the requirement for notification of current property owner established in WDNR Form 4400-245.

Date:
28 September 2010

Contact:
Brian Maillet
Ed Buc
Phone:
414.276.7742

Email:
bmaillet@arcadis-us.com
ebuc@arcadis-us.com

Our ref:
WI001016.0005

Sincerely,
ARCADIS

Brian J. Maillet
Associate Project Manager

Ed Buc, PE
Principal Engineer

Copies:
Gary Kjelleren, General Dynamics, Inc.
David O'Connor, ArvinMeritor
Gary A. Peters, Howard & Howard Attorneys, PLLC